

---

---

# Computational analysis of advanced control methods applied to RWM control in tokamaks

Oksana N. Katsuro-Hopkins

*Columbia University, New York, NY, USA*



with S.A. Sabbagh, J.M. Bialek

US–Japan Workshop on MHD Control,  
Magnetic Islands and Rotation


November 23-25, 2008

University of Texas, Austin, Texas, USA

---

---


# Control theory terminology used in this talk

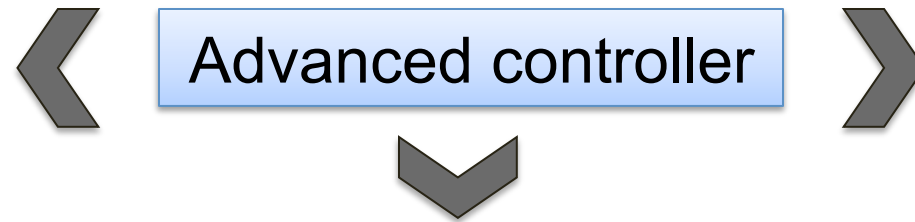

---

---

# Control theory terminology used in this talk

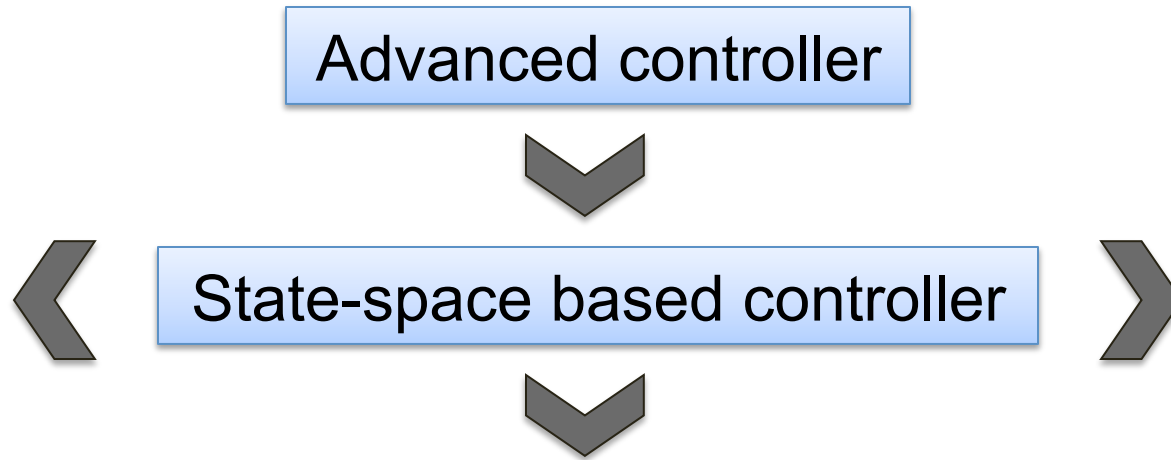

---

---

# Control theory terminology used in this talk

Advanced controller



State-space based controller



Linear Quadratic  
Gaussian Controller  
(**LQG**)

---

---

# Control theory terminology used in this talk

Advanced controller



State-space based controller



Linear Quadratic  
Gaussian Controller  
(LQG)



Optimal Controller



Optimal Observer

# Control theory terminology used in this talk

Advanced controller



State-space based controller



Linear Quadratic  
Gaussian Controller  
(LQG)



Optimal Controller



Optimal Observer



Kalman Filter

---

---

# LQG controller is capable to enhance resistive wall mode control system

- Motivation

- To improve RWM feedback control in NSTX with present external RWM coils


- Outline

- Advantages of the LQG controller
- VALEN state space modeling with mode rotation and control theory basics used in the design of LQG
- Application of the advanced controller techniques to NSTX

---

---

# Limiting $\beta_n$ RWM in ITER can be improved with LQG controller\* and external field correction coils

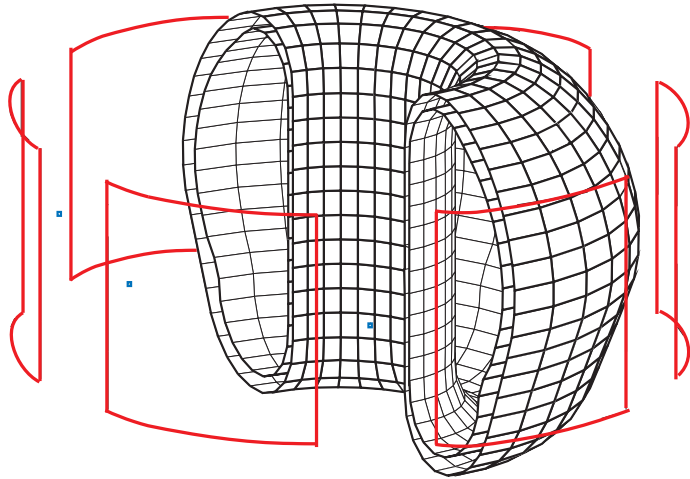


- Simplified ITER model includes
  - ❑ double walled vacuum vessel
  - ❑ 3 external control coil pairs
  - ❑ 6 magnetic field flux sensors on the midplane ( $z=0$ )

\*Nucl. Fusion 47 (2007) 1157-1165




# Limiting $\beta_n$ RWM in ITER can be improved with LQG controller\* and external field correction coils

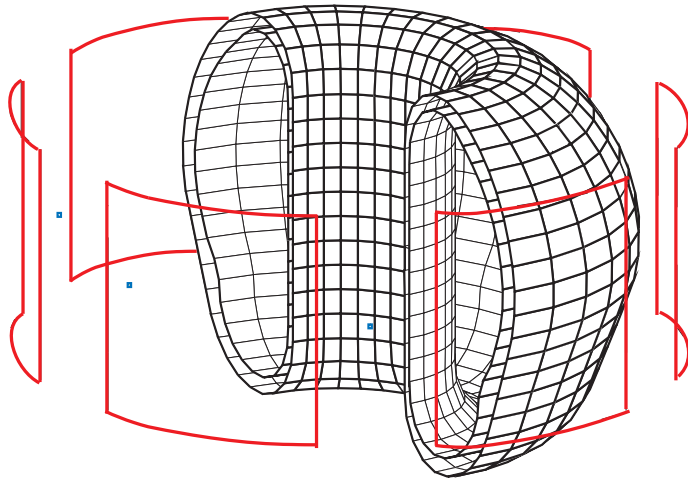


- Simplified ITER model includes
  - ❑ double walled vacuum vessel
  - ❑ 3 external control coil pairs
  - ❑ 6 magnetic field flux sensors on the midplane ( $z=0$ )
- 10 Gauss sensor noise RWM
- LQG is robust for all  $C_\beta < 86\%$  with respect to  $\beta_N$

\*Nucl. Fusion 47 (2007) 1157-1165


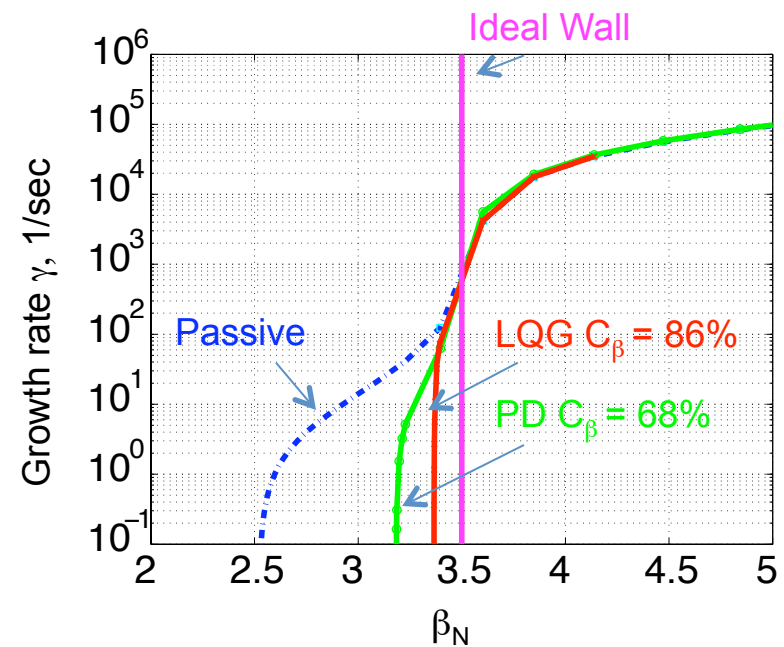


# Limiting $\beta_n$ RWM in ITER can be improved with LQG controller\* and external field correction coils

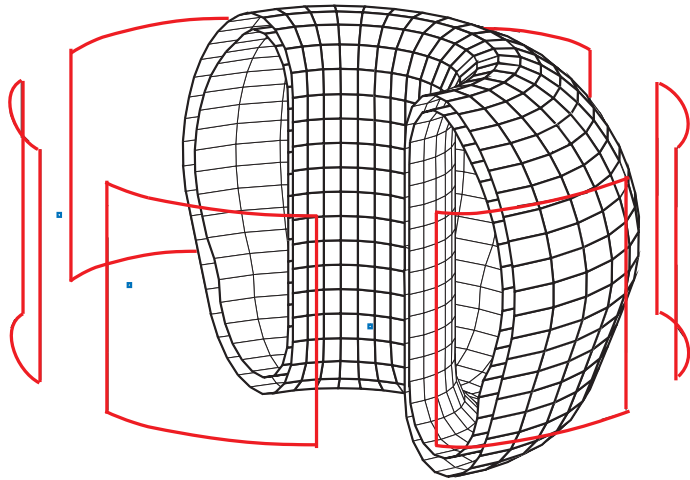

- Simplified ITER model includes
  - double walled vacuum vessel
  - 3 external control coil pairs
  - 6 magnetic field flux sensors on the midplane ( $z=0$ )
- 10 Gauss sensor noise RWM
- LQG is robust for all  $C_\beta < 86\%$  with respect to  $\beta_N$



\*Nucl. Fusion 47 (2007) 1157-1165

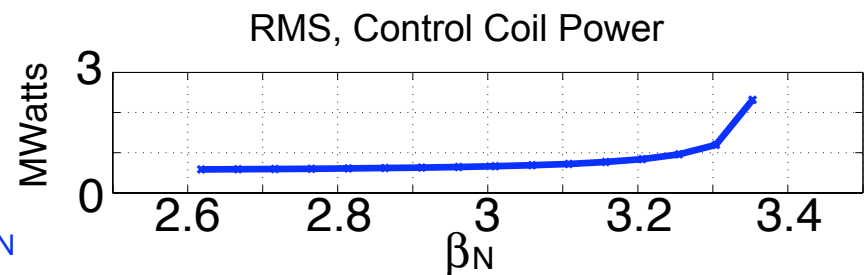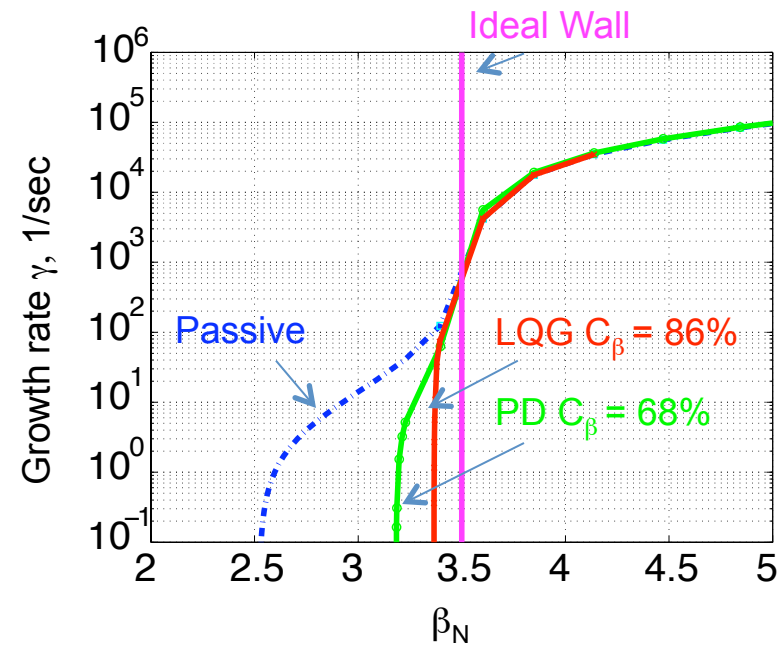

---



---

DIII-D LQG is robust with respect to  $\beta_N$  and stabilizes RWM up to ideal wall limit

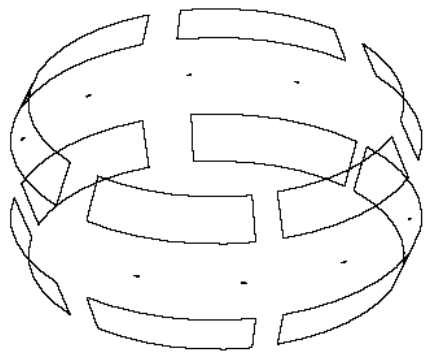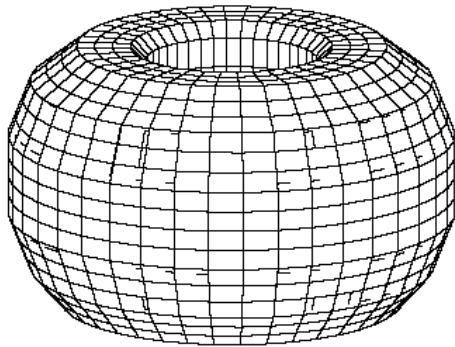


*DIII-D with  
internal control coils*

# DIII-D LQG is robust with respect to $\beta_N$ and stabilizes RWM up to ideal wall limit

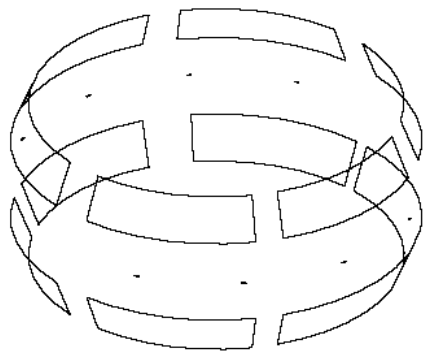
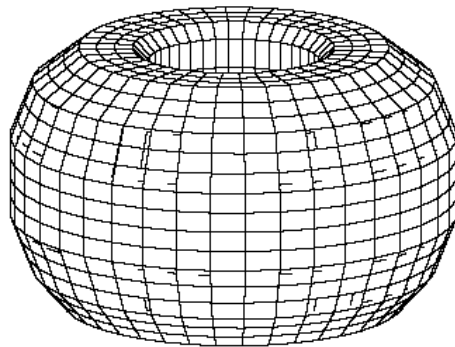


*DIII-D with  
internal control coils*


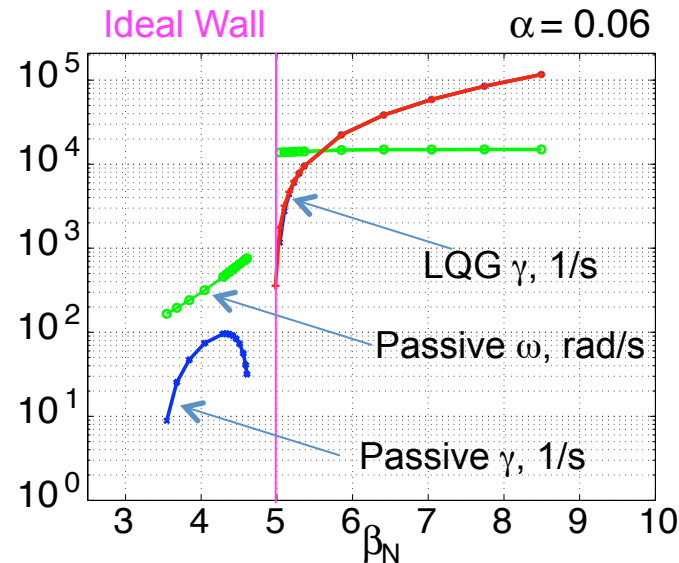


- LQG is robust with respect to  $\beta_N$  and stabilize RWM up to ideal wall limit for  $0.01 < \text{torque} < 0.08$

# DIII-D LQG is robust with respect to $\beta_N$ and stabilizes RWM up to ideal wall limit

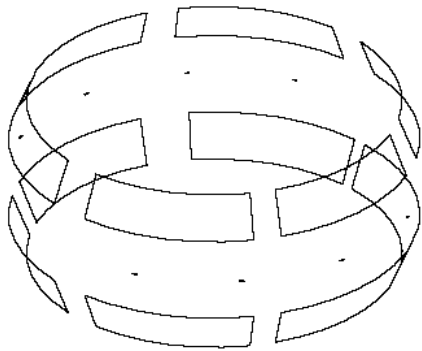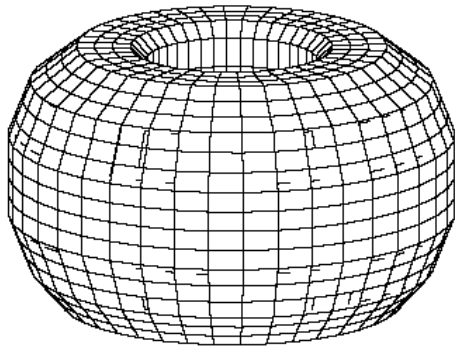

DIII-D with  
internal control coils

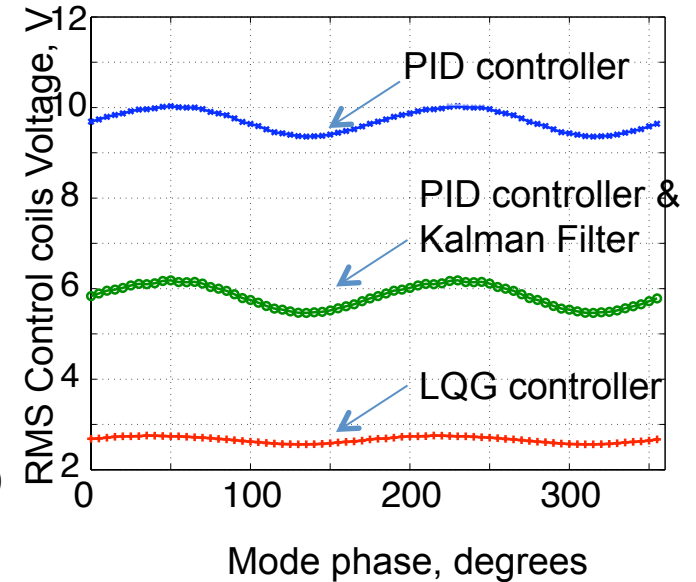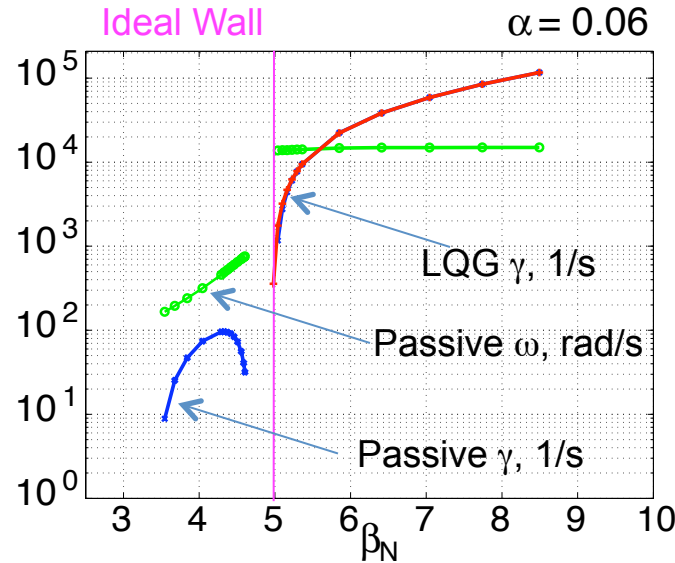


- LQG is robust with respect to  $\beta_N$  and stabilize RWM up to ideal wall limit for  $0.01 < \text{torque} < 0.08$
- LQG provides better reduction of current and voltages compared with proportional gain controller

---

---

# Initial results using advanced Linear Quadratic Gaussian (LQG) controller in KSTAR yield **factor of 2 power reduction** for white noise\*

n=1 RWM passive  
stabilization currents


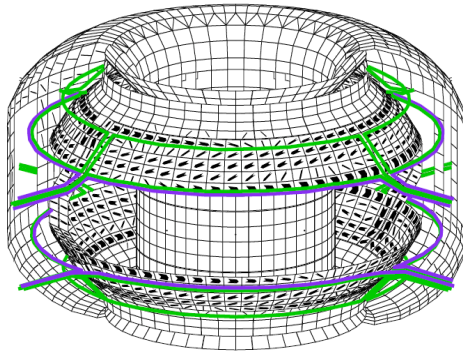


- Conducting hardware, IVCC set up in VALEN-3D\* based on engineering drawings
- Conducting structures modeled
  - ❑ Vacuum vessel with actual port structures
  - ❑ Center stack back-plates
  - ❑ Inner and outer divertor back-plates
  - ❑ Passive stabilizer (PS)
  - ❑ PS Current bridge

\* IAEA FEC 2008 TH/P9-1 O. Katsuro-Hopkins

# Initial results using advanced Linear Quadratic Gaussian (LQG) controller in KSTAR yield **factor of 2 power reduction** for white noise\*

n=1 RWM passive stabilization currents

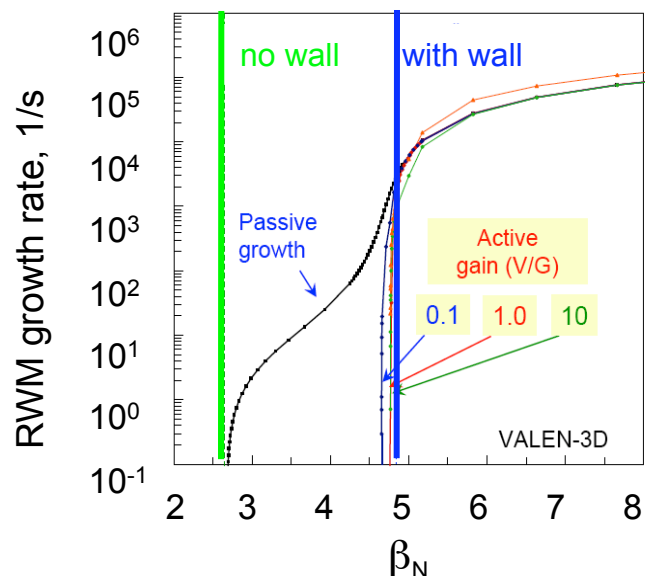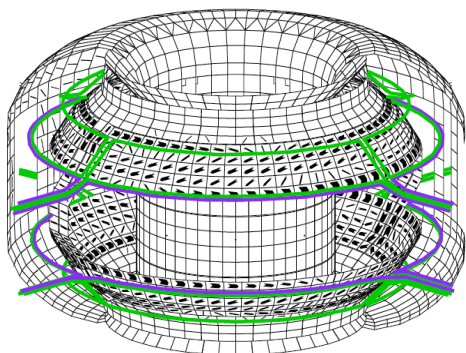


- Conducting hardware, IVCC set up in VALEN-3D\* based on engineering drawings
- Conducting structures modeled
  - Vacuum vessel with actual port structures
  - Center stack back-plates
  - Inner and outer divertor back-plates
  - Passive stabilizer (PS)
  - PS Current bridge
- IVCC allows active n=1 RWM stabilization near ideal wall  $\beta_n$  limit, for proportional gain and LQG controllers

\* IAEA FEC 2008 TH/P9-1 O. Katsuro-Hopkins

# Initial results using advanced Linear Quadratic Gaussian (LQG) controller in KSTAR yield **factor of 2 power reduction** for white noise\*

n=1 RWM passive stabilization currents

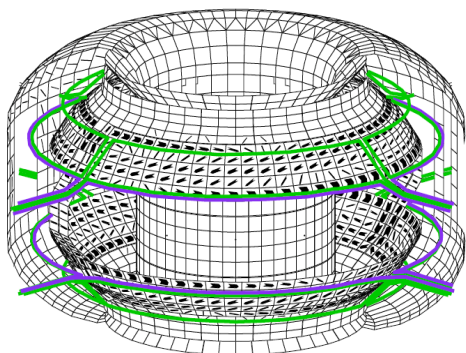

White noise (1.6-2.0G RMS)


(RMS values)

$C_\beta$	$I_{IVCC}(A)$	$V_{IVCC}(V)$	$P_{IVCC}(W)$
80%	3%	50%	47%
95%	15%	51%	58%

Unloaded IVCC  
L/R=12.8ms

80%	38%	75%	47%
95%	15%	73%	58%

FAST IVCC circuit  
L/R=1.0ms

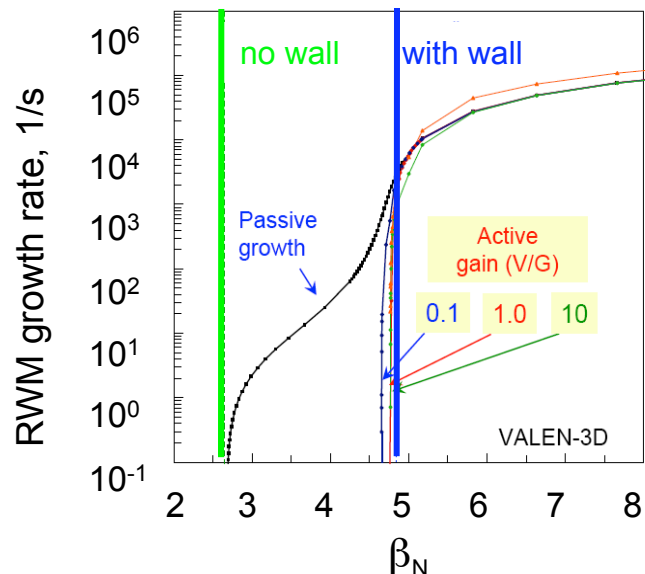

- Conducting hardware, IVCC set up in VALEN-3D\* based on engineering drawings
- Conducting structures modeled
  - ❑ Vacuum vessel with actual port structures
  - ❑ Center stack back-plates
  - ❑ Inner and outer divertor back-plates
  - ❑ Passive stabilizer (PS)
  - ❑ PS Current bridge
- IVCC allows active n=1 RWM stabilization near ideal wall  $\beta_n$  limit, for proportional gain and LQG controllers

\* IAEA FEC 2008 TH/P9-1 O. Katsuro-Hopkins




---

---


Tutorial  
on selected control theory topics

# Digital LQG controller proposed to improve stabilization performance

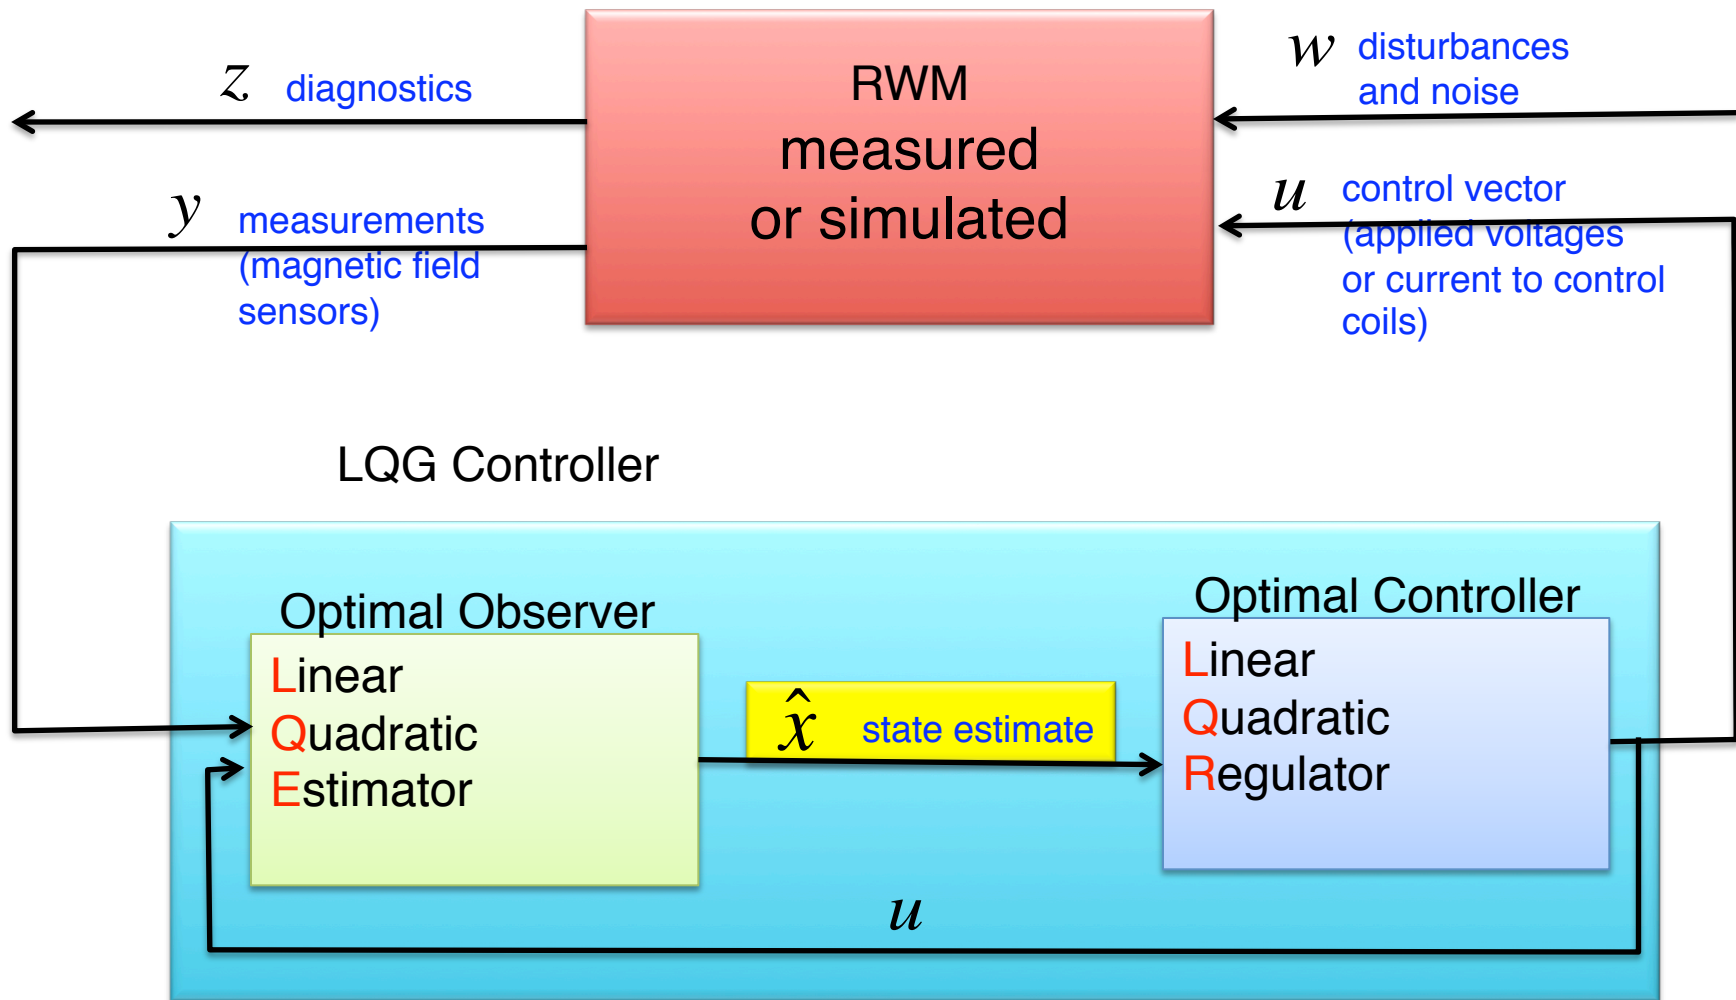

# Detailed diagram of digital LQG controller

## LQG Controller

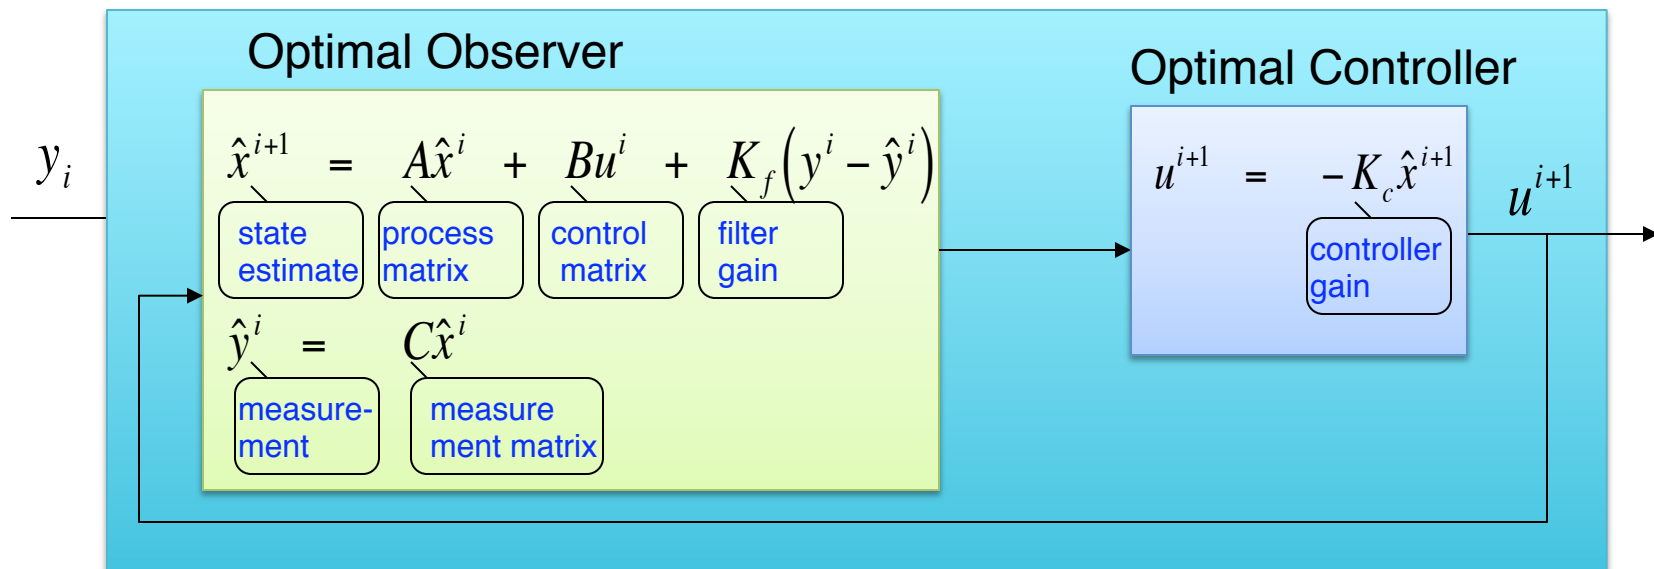


- State estimate stored in observer provides information about amplitude and phase of RWM and takes into account wall currents
- Dimensions of LQG matrices depends on
  - State estimate (reduced balanced VALEN states)~10-20
  - Number of control coils ~3
  - Number of sensors ~ 12-24
- All matrixes in LQG calculated in advance using VALEN state-space for particular 3-D tokamak geometry, fixed plasma mode amplitude and rotation speed

# Balanced truncation significantly reduces VALEN state space

Full VALEN computed wall currents:

I ~3000 states

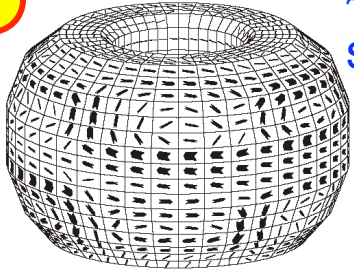

Balancing transformation  
 $\hat{x} = \vec{T}\vec{x}$

II

$$\vec{x} = \begin{pmatrix} \vec{I}_w & \vec{I}_f & I_d \end{pmatrix}^T; \quad \vec{u} = \vec{V}_f;$$

$$\vec{A} = -\vec{L}^{-1} \cdot \vec{R}; \quad \vec{B} = \vec{L}^{-1} \cdot \vec{I}_{cc};$$

$$\vec{y} = \vec{\Phi}; \quad \vec{C} = \vec{M}$$


sensor fluxes      mutual inductance matrix

Balanced realization:

RWM fixed phase

$$\left[ \begin{array}{c|c} \vec{T}\vec{A}\vec{T}^{-1} & \vec{T}\vec{B} \\ \hline \vec{C}\vec{T}^{-1} & \vec{0} \end{array} \right] = \left[ \begin{array}{c|c} \vec{A} & \vec{B} \\ \hline \vec{C} & \vec{0} \end{array} \right] = \left[ \begin{array}{cc|c} \tilde{A}_{11} & \tilde{A}_{12} & \tilde{B}_1 \\ \tilde{A}_{21} & \tilde{A}_{22} & \tilde{B}_2 \\ \hline \tilde{C}_1 & \tilde{C}_2 & 0 \end{array} \right]$$

2999 Balanced states:

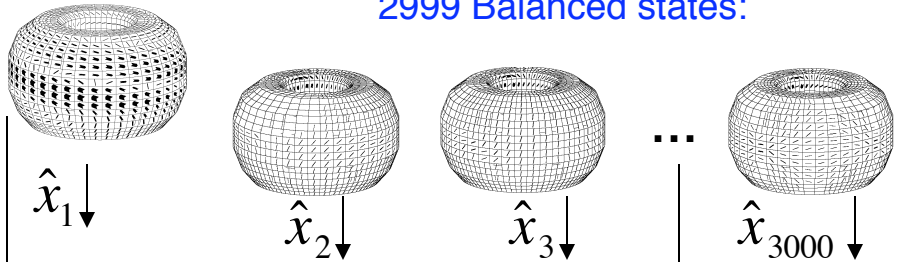

Truncation

III State reduction:

$$\left[ \begin{array}{c|c} \tilde{A}_{11} & \tilde{B}_1 \\ \hline \tilde{C}_1 & 0 \end{array} \right] \equiv \left[ \begin{array}{c|c} A & B \\ \hline C & 0 \end{array} \right]$$

~3-20 states

- I What is VALEN state-space?
- II How to find balancing transformation  $\vec{T}$  ?
- III How to determine number of states to keep ?

# State-space control approach may allow superior feedback performance



- VALEN circuit equations after including unstable plasma mode. Fluxes at the wall, feedback coils and plasma are

$$\vec{\Phi}_w = \vec{L}_{ww} \cdot \vec{I}_w + \vec{L}_{wf} \cdot \vec{I}_f + \vec{L}_{wp} \cdot I_d$$

$$\vec{\Phi}_f = \vec{L}_{fw} \cdot \vec{I}_w + \vec{L}_{ff} \cdot \vec{I}_f + \vec{L}_{fp} \cdot I_d$$

$$\Phi_p = \vec{L}_{pw} \cdot \vec{I}_w + \vec{L}_{pf} \cdot \vec{I}_f + \vec{L}_{pp} \cdot I_d$$

- Equations for system evolution

$$\begin{pmatrix} \vec{L}_{ww} & \vec{L}_{wf} & \vec{L}_{wp} \\ \vec{L}_{fw} & \vec{L}_{ff} & \vec{L}_{fp} \\ \vec{L}_{pw} & \vec{L}_{pf} & \vec{L}_{pp} \end{pmatrix} \cdot \frac{d}{dt} \begin{pmatrix} \vec{I}_w \\ \vec{I}_f \\ I_d \end{pmatrix} = \begin{pmatrix} \vec{R}_w & 0 & 0 \\ 0 & \vec{R}_f & 0 \\ 0 & 0 & \vec{R}_d \end{pmatrix} \cdot \begin{pmatrix} \vec{I}_w \\ \vec{I}_f \\ I_d \end{pmatrix} + \begin{pmatrix} \vec{0} \\ \vec{V}_f \\ 0 \end{pmatrix}$$

$$\begin{cases} \dot{\vec{x}} = \vec{A}\vec{x} + \vec{B}\vec{u} \\ \vec{y} = C\vec{x} \end{cases}$$

- In the state-space form

where  $\vec{x} = (\vec{I}_w \ \vec{I}_f \ I_d)^T$ ;  $\vec{A} = -\vec{L}^{-1} \cdot \vec{R}$ ;  $\vec{B} = \vec{L}^{-1} \cdot \vec{I}_{cc}$ ;  $\vec{u} = \vec{V}_f$

& measurements  $\vec{y} = \vec{\Phi}_s$  are sensor fluxes. State-space dimension ~1000 elements!

- Classical control law with proportional gain defined as  $\vec{u} = -\vec{G}_p \vec{y}$

---

---

## VALEN formulation with rotation allows inclusion of mode phase into state space\*

- VALEN uses two copies of a single unstable mode with  $\pi/2$  toroidal displacement of these two modes
- The VALEN uses two dimensionless parameter normalized torque “ $\alpha$ ” and normalized energy “ $s$ ”

$$s = -\frac{\delta W}{L_B I_b^2 / 2} = -\frac{\text{energy required with plasma}}{\text{energy required WITHOUT plasma}}$$

$$\alpha = \frac{\text{torque}}{L_B I_b^2 / 2} = \frac{\text{torque on mode by plasma}}{\text{energy required WITHOUT plasma}}$$



- The VALEN parameters ‘ $s$ ’ and ‘ $\alpha$ ’ together determine growth rate  $\gamma$  and rotation  $\Omega$  of the plasma mode
- LQG is optimized off line for best stability region with respect to ‘ $s$ ’ and ‘ $\alpha$ ’ parameters.

\*Boozer PoP Vol6, No. 8, 3190 (1999)

# Measure of system controllability and observability is given by controllability and observability grammians

$$\begin{bmatrix} A & B \\ \hline C & 0 \end{bmatrix}$$

- Given stable Linear Time-Invariant (LTI) Systems
- Observability grammian,  $\Gamma_o = \int_0^\infty e^{A^T \tau} C^T C e^{A \tau} d\tau$ , can be found by solving continuous-time Lyapunov equation,  $A^T \Gamma_o + \Gamma_o A + C^T C = 0$ , provides measure of output energy:  $\|y\|_2^2 = x_0^T \Gamma_o x_0$
- $\Gamma_o = U \Lambda_o U^T$  defines an “observability ellipsoid” in the state space with the longest principal axes along the most observable directions
- Controllability grammian,  $\Gamma_c = \int_0^\infty e^{A \tau} B B^T e^{A^T \tau} d\tau$ , can be found by solving continuous-time Lyapunov equation,  $A \Gamma_c + \Gamma_c A^T + B B^T = 0$ , provides measure of input(control) energy:  $\|u\|_2^2 = x_0^T \Gamma_c^{-1} x_0$
- $\Gamma_c = V \Lambda_c V^T$  defines a “controllability ellipsoid” in the state space with the longest principal axes along the most controllable directions

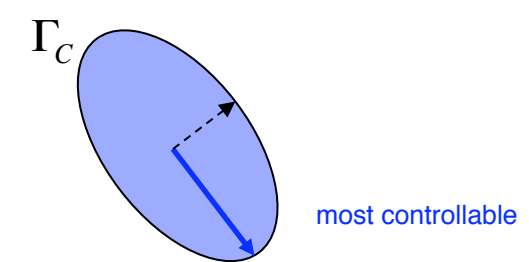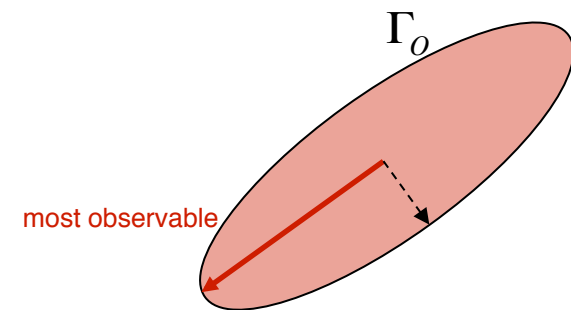

# Balanced realization exists for every stable controllable and observable system



- Controllable, observable & stable system called balanced if

$$\tilde{\Gamma}_c = \tilde{\Gamma}_o = \begin{pmatrix} \sigma_1 & 0 & 0 \\ 0 & \ddots & 0 \\ 0 & 0 & \sigma_n \end{pmatrix} = \Sigma, \text{ where } \sigma_i > \sigma_j \text{ for } i > j$$

$\sigma_i$  - Hankel Singular Values

- Balancing similarity transformation transforms observability and controllability ellipsoids to an identical ellipsoid aligned with the principle axes along the coordinate axes.
- The balanced transformation  $T$  can be defined in two steps:

- Start with SVD of controllability grammian  $\Gamma_c = VS_cV^T$


and define the first transformation as  $T_1 := VS_c^{1/2}$

- Perform SVD of observability grammian in the new basis:  $\tilde{\Gamma}_o = T_1^T \Gamma_o T_1 = US_oU^T$

the second transformation defined as  $T_2 := US_o^{-1/4}$

- The final transformation matrix is given by:

$$T := T_1 T_2 = VS_c^{1/2} US_o^{-1/4}$$

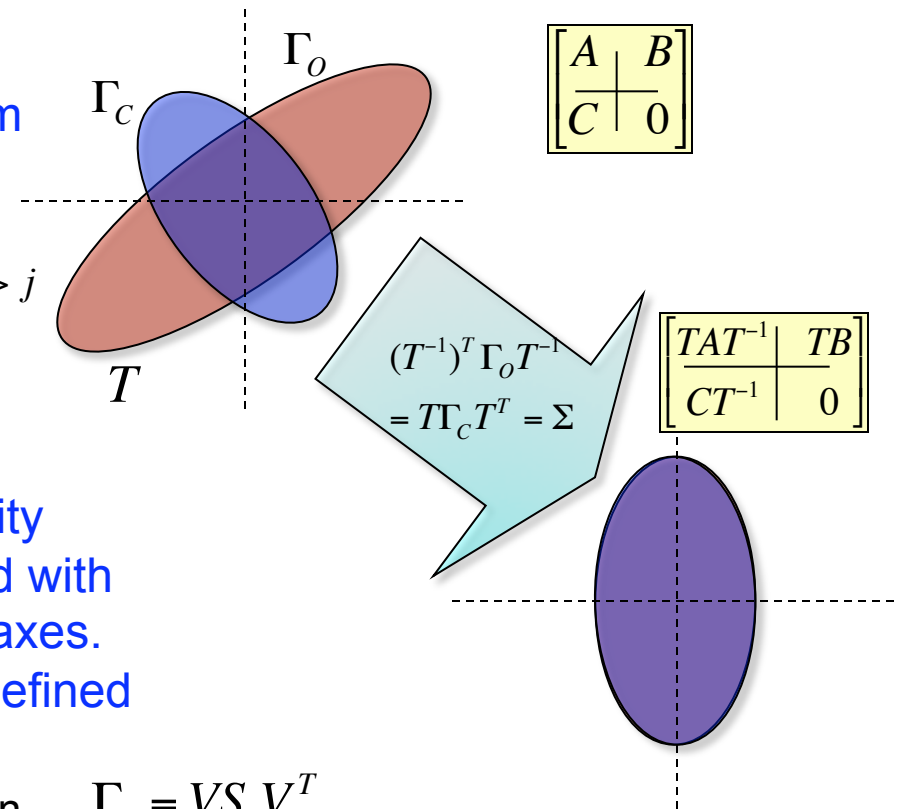





# Determination of optimal controller gain for the dynamic system

For given dynamic process:  $\dot{\vec{x}} = \vec{A}\vec{x} + \vec{B}\vec{u}$

Find the matrix  $\vec{K}_c$  such that control law:  $\vec{u} = -\vec{K}_c\vec{x}$

minimizes Performance Index:  $J = \int_t^T (\hat{\vec{x}}'(\tau)\vec{Q}_r(\tau)\hat{\vec{x}}(\tau) + \vec{u}'(\tau)\vec{R}_r(\tau)\vec{u}(\tau))d\tau \rightarrow \min$

where tuning parameters are presented by  $\vec{Q}_r, \vec{R}_r$  - state and control weighting matrixes,

Solution:

Controller gain for the steady-state can be calculated as  $\vec{K}_c = \vec{R}^{-1}\vec{B}^T\vec{S}$

Where  $\vec{S}$  is solution of the controller Riccati matrix equation

$$\vec{S}\vec{A}_r + \vec{A}_r^T\vec{S} - \vec{S}\vec{B}_r\vec{R}_r^{-1}\vec{B}_r^T\vec{S} + \vec{Q}_r = 0$$



# Determination of optimal observer gain for the dynamic system

For given stochastic dynamic process:

$$\dot{\vec{x}} = \vec{A}_r \vec{x} + \vec{B}_r \vec{u} + \vec{v}$$

with measurements:

$$\vec{y} = \vec{C}_r \vec{x} + \vec{w}$$

Find the matrix  $\vec{K}_f$  such that observer equation

$$\dot{\hat{\vec{x}}} = \vec{A}_r \hat{\vec{x}} + \vec{B}_r \vec{u} + \vec{K}_f (\vec{y} - \vec{C}_r \hat{\vec{x}})$$

minimizes error covariance:

$$E\{(\vec{x} - \hat{\vec{x}})(\vec{x} - \hat{\vec{x}})^T | \vec{y}(\tau), \tau \leq t\} \rightarrow \min$$

where tuning parameters are presented by  $\vec{V}$ ,  $\vec{W}$  - plant and measurement noise covariance matrix


Solution:

Observer gain for the steady-state can be calculated as  $\vec{K}_f = \vec{P} \vec{C}_r^T \vec{W}^{-1}$

Where  $\vec{P}$  is solution of the observer Riccati matrix equation

$$\vec{A}_r \vec{P} + \vec{P} \vec{A}_r^T - \vec{P} \vec{C}_r^T \vec{W}^{-1} \vec{C}_r \vec{P} + \vec{V}^T = 0$$

# Closed system equations with optimal controller and optimal observer based on reduced order model

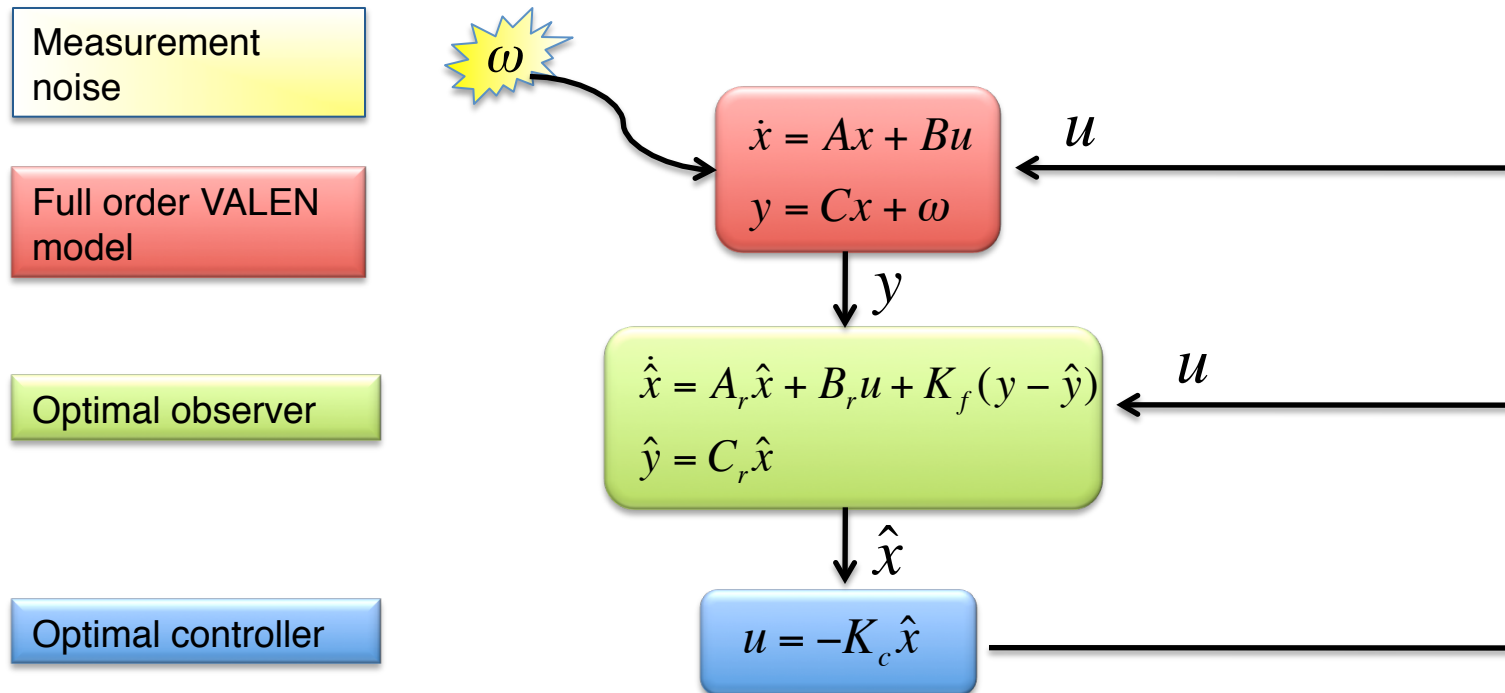


⇐ Closed loop continuous system allows to

- ❑ Test if Optimal controller and observer stabilizes original full order model and defined number of states in the LQG controller
- ❑ Verify robustness with respect to  $\beta_n$
- ❑ Estimate RMS of steady-state currents, voltages and power

$$\begin{pmatrix} \dot{x} \\ \dot{\hat{x}} \end{pmatrix} = \begin{pmatrix} A & -BK_c \\ K_f C & F \end{pmatrix} \begin{pmatrix} x \\ \hat{x} \end{pmatrix} + \begin{pmatrix} 0 \\ K_f \end{pmatrix} \omega$$

$$F = A_r - K_f C_r - B_r K_c$$

# Advanced controller methods planned to be tested on NSTX with future application to KSTAR

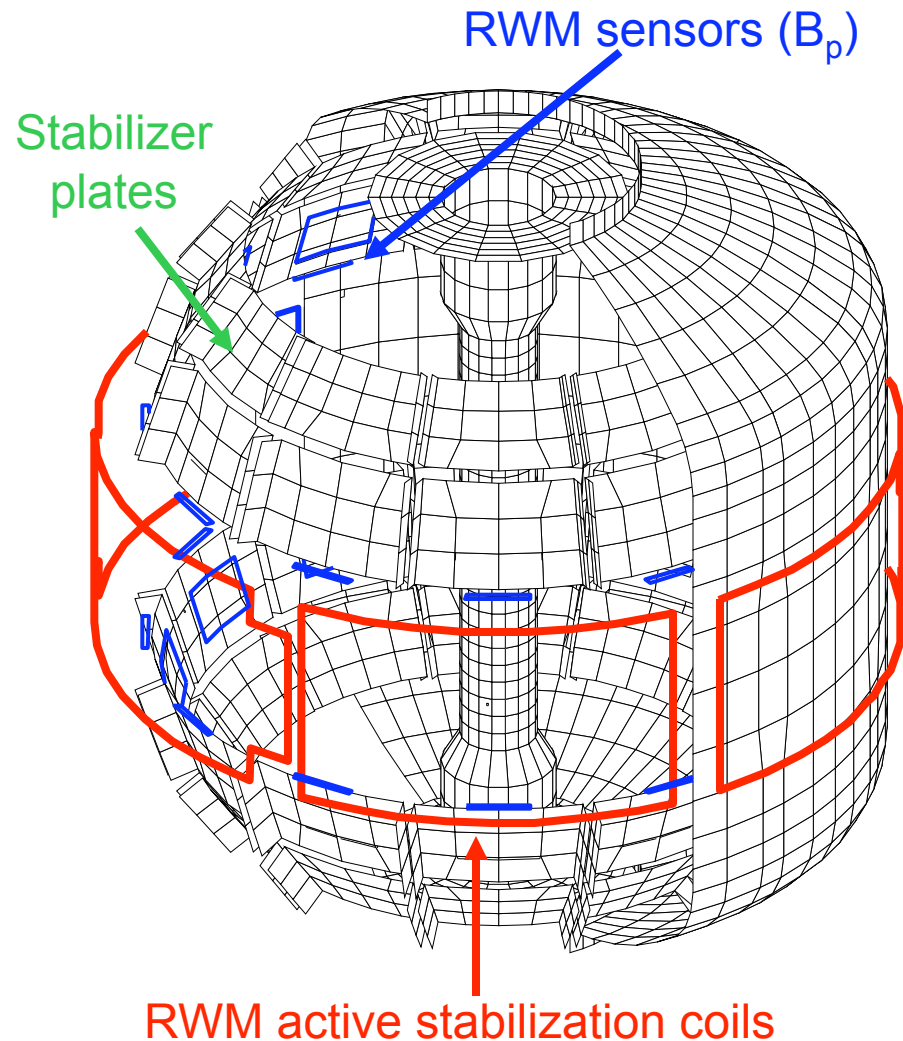

- VALEN NSTX Model includes
  - Stabilizer plates
  - External mid-plane control coils closely coupled to vacuum vessel
  - Upper and lower  $B_p$  sensors in actual locations
  - Compensation of control field from sensors
  - Experimental Equilibrium reconstruction (including MSE data)
- Present control system on NSTX uses Proportional Gain


# Advanced control techniques suggest significant feedback performance improvement for NSTX up to $\beta_n / \beta_n^{\text{wall}} = 95\%$

- Classical proportional feedback methods


- VALEN modeling of feedback systems agrees with experimental results
- RWM was stabilized up to  $\beta_n = 5.6$  in experiment.

- Advanced feedback control may improve feedback performance


- Optimized state-space controller can stabilize up to  $C_\beta=87\%$  for upper Bp sensors and up to  $C_\beta=95\%$  for mid-plane sensors
- Uses only 7 modes for LQG design

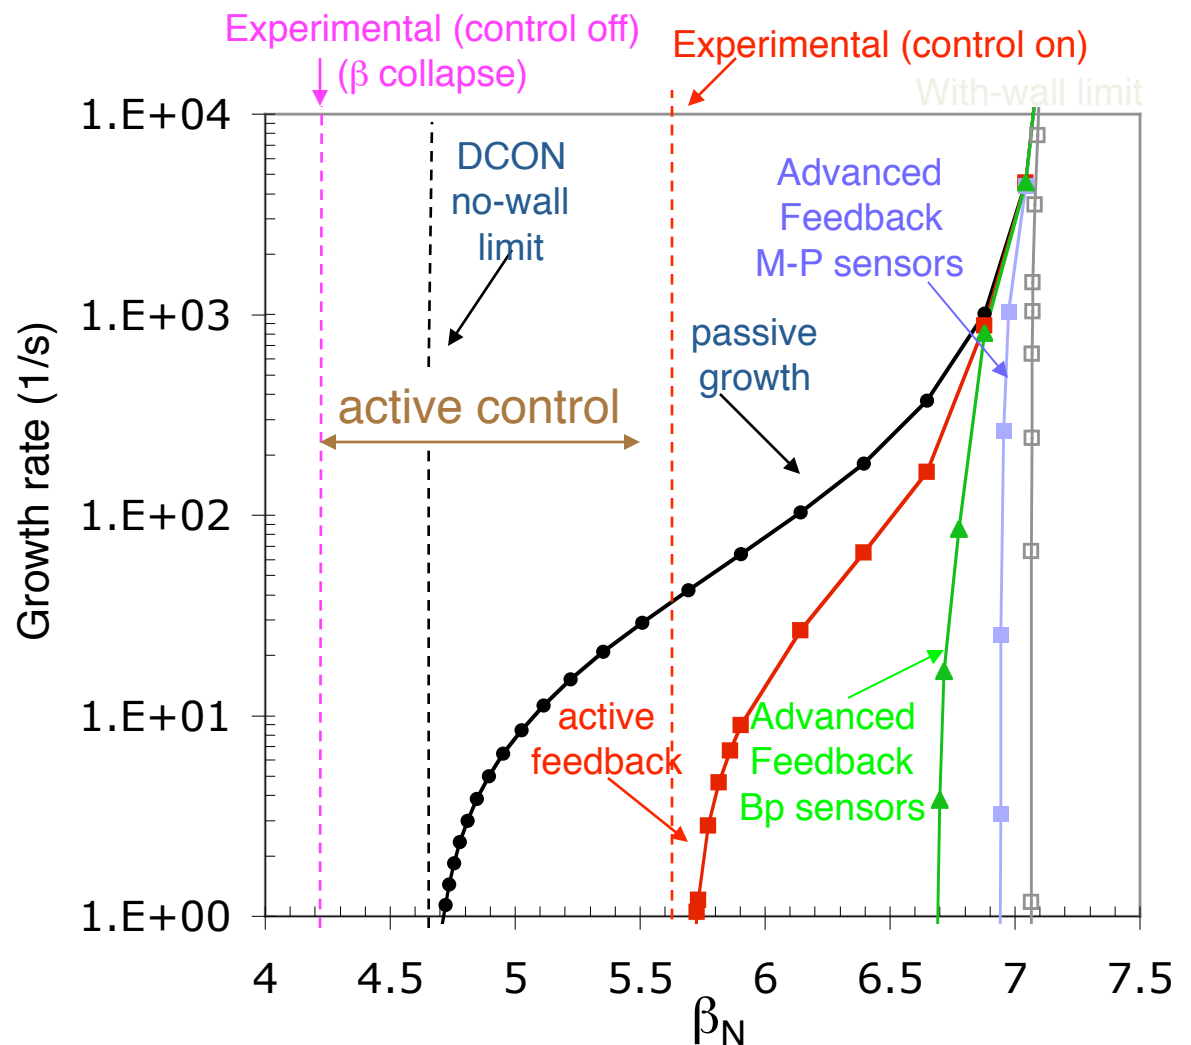

# LQG with mode phase needs only 9 modes using $B_p$ upper and lower sensors sums and differences

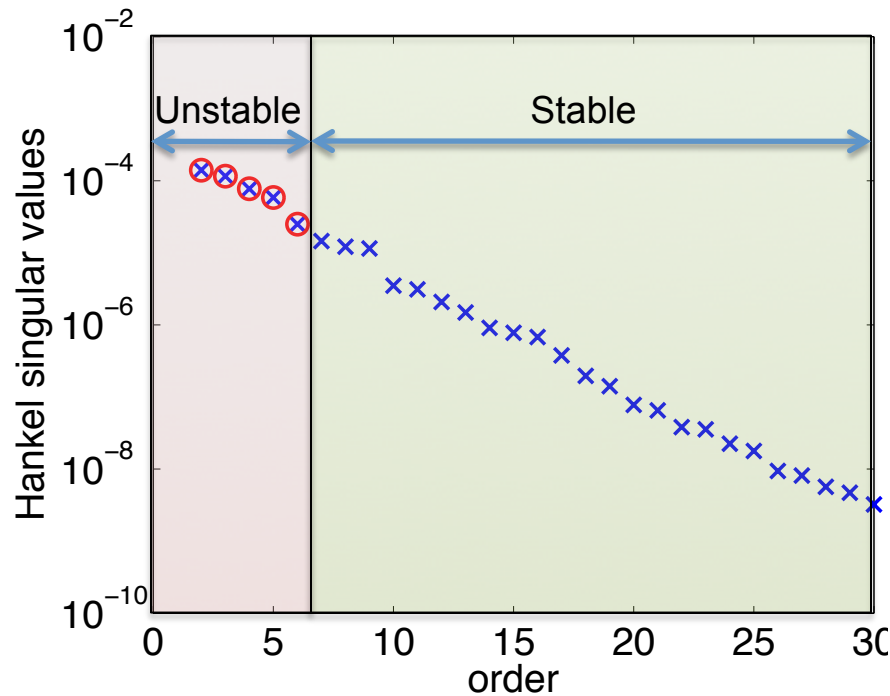


- Fixed mode (fixed phase)
- 7 states (1 unstable mode + 6 stable balanced states)
- $LQG(\beta_N=6.7, N=7)$


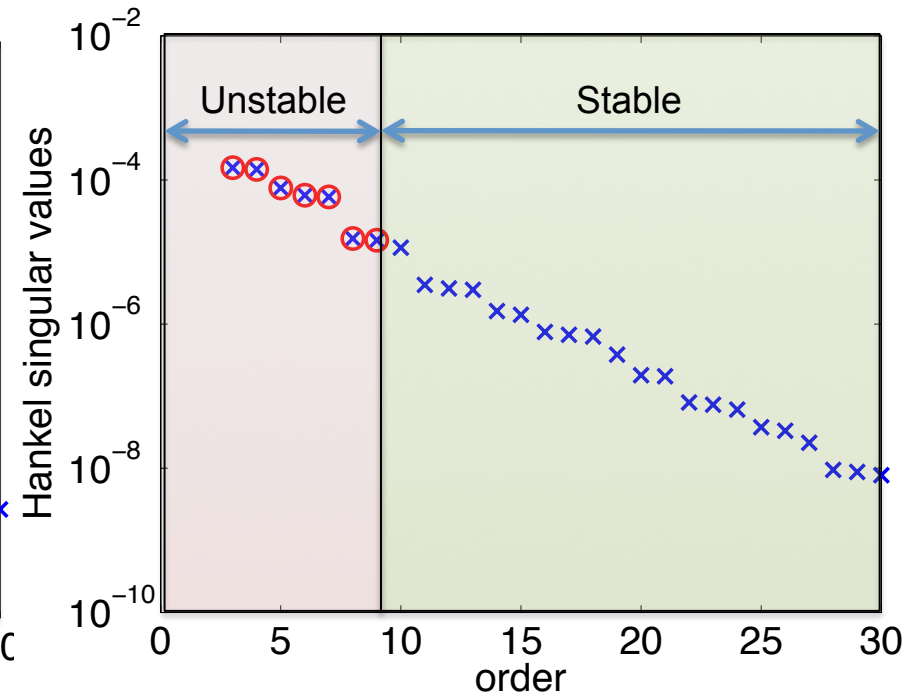


- Rotating mode (phase included)
- 9 states (2 unstable modes + 7 stable balanced states)
- $LQG(\alpha=0, \beta_N=6.7, N=9)$

# LQG(0,6.7,9) stabilizes slow rotating RWM mode up to $\beta_N < 6.7$


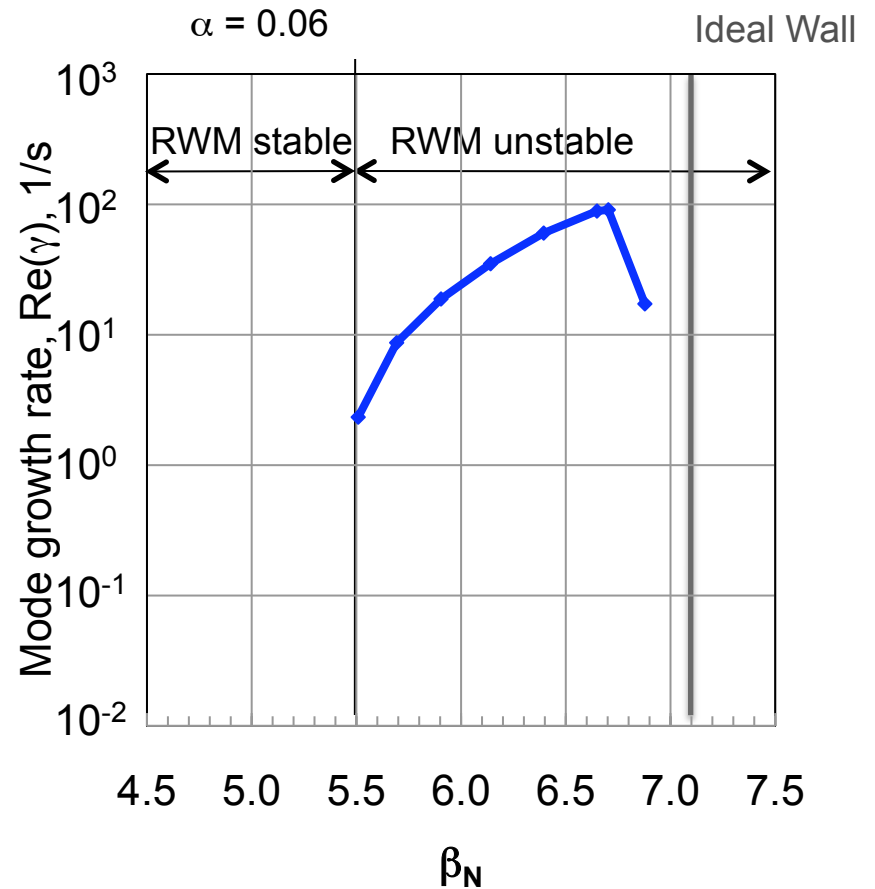


# LQG(0,6.7,9) stabilizes slow rotating RWM mode up to $\beta_N < 6.7$

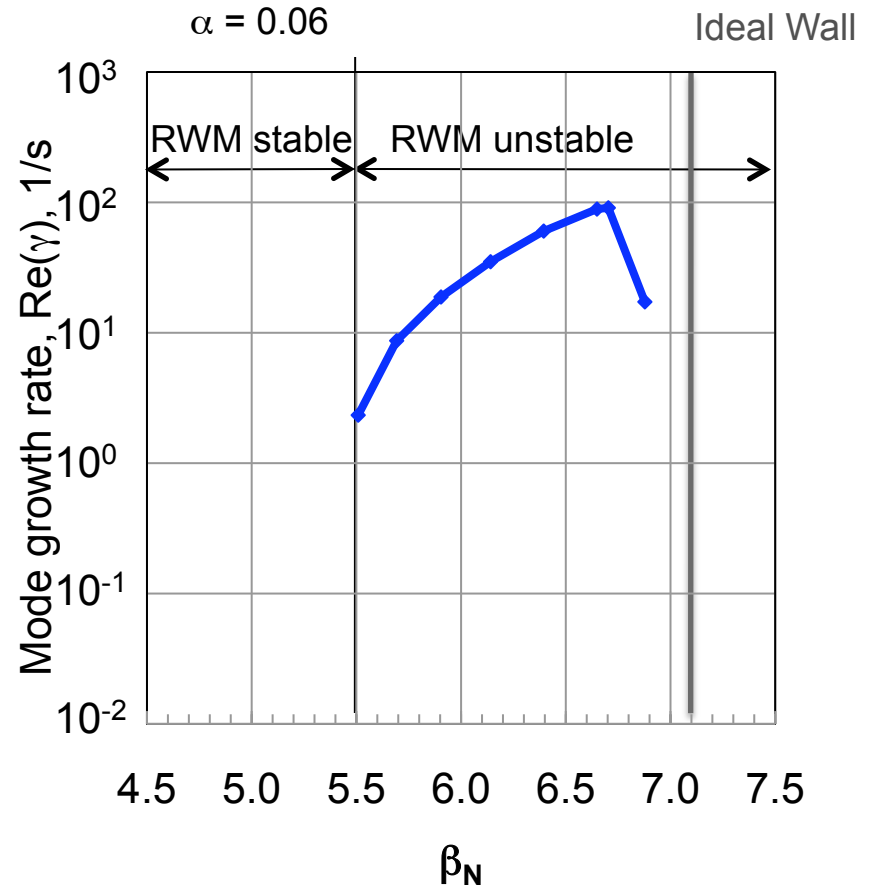
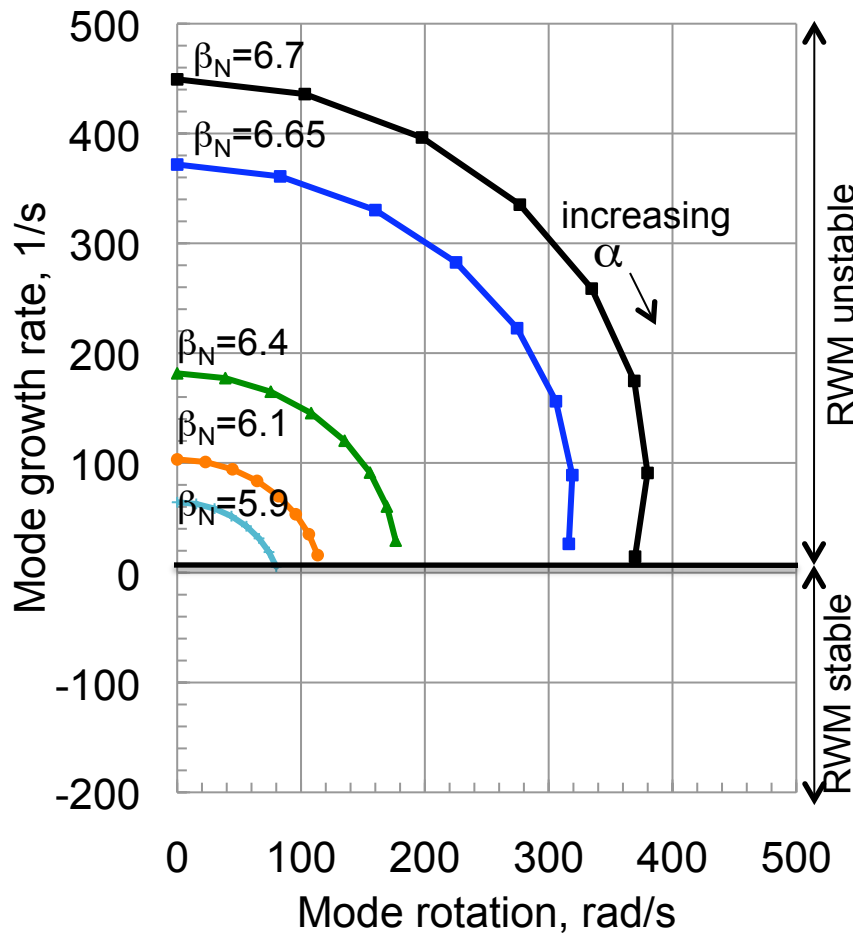




# LQG(0,6.7,9) stabilizes slow rotating RWM mode up to $\beta_N < 6.7$

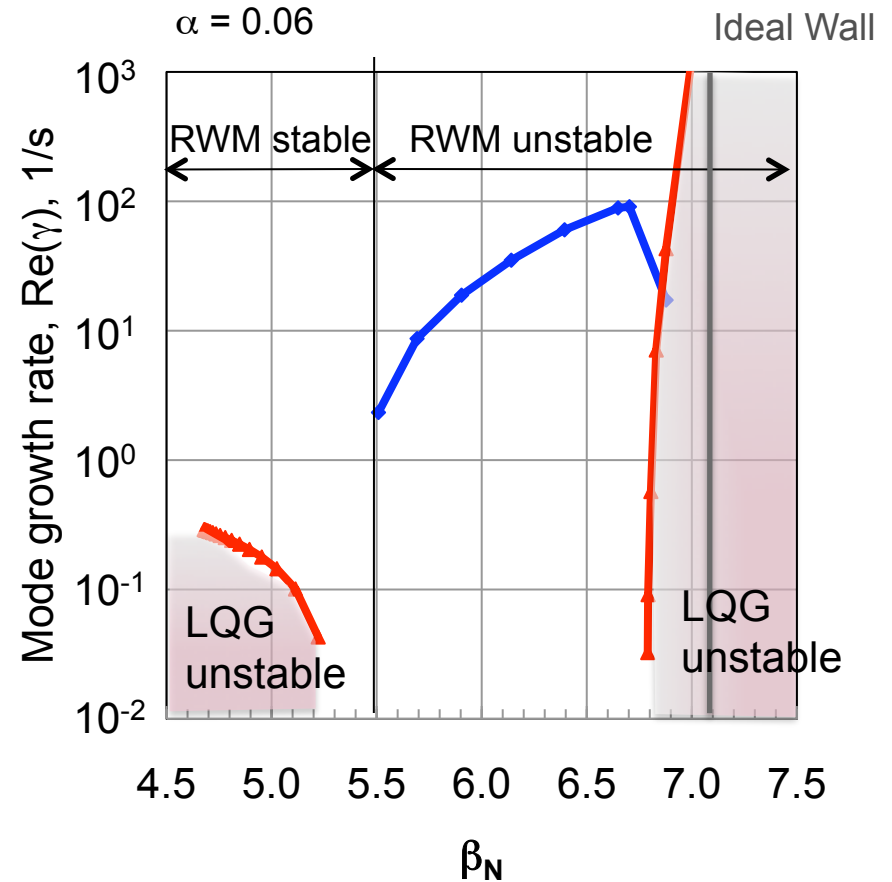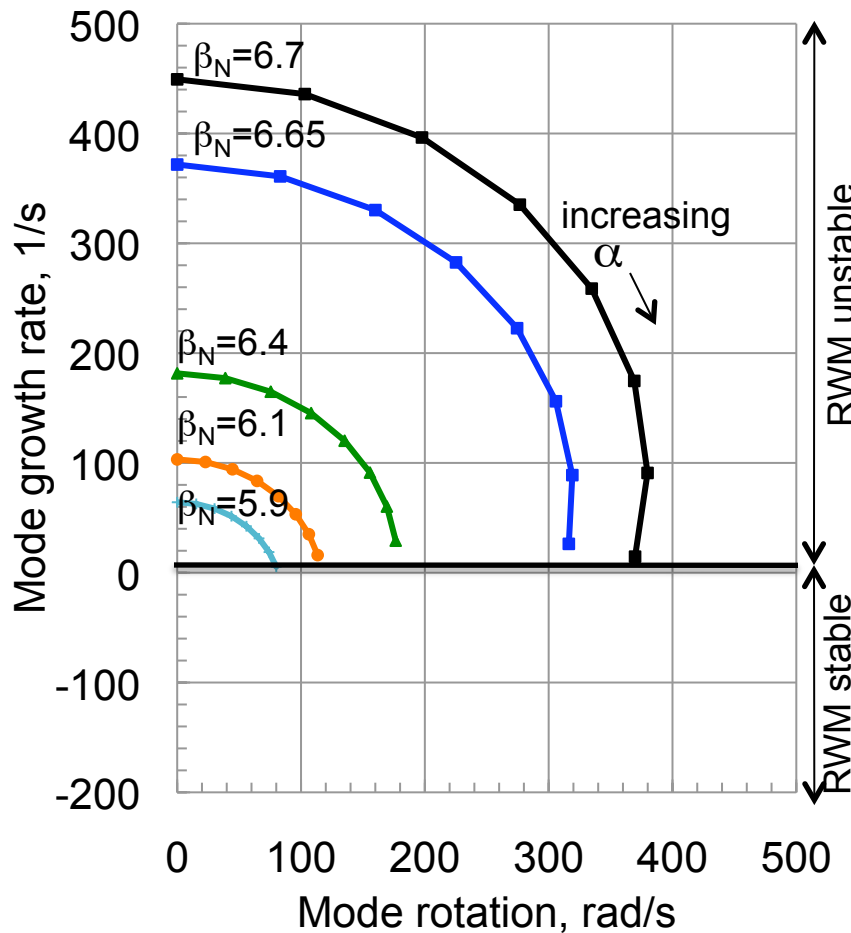


# LQG(0,6.7,9) stabilizes slow rotating RWM mode up to $\beta_N < 6.7$

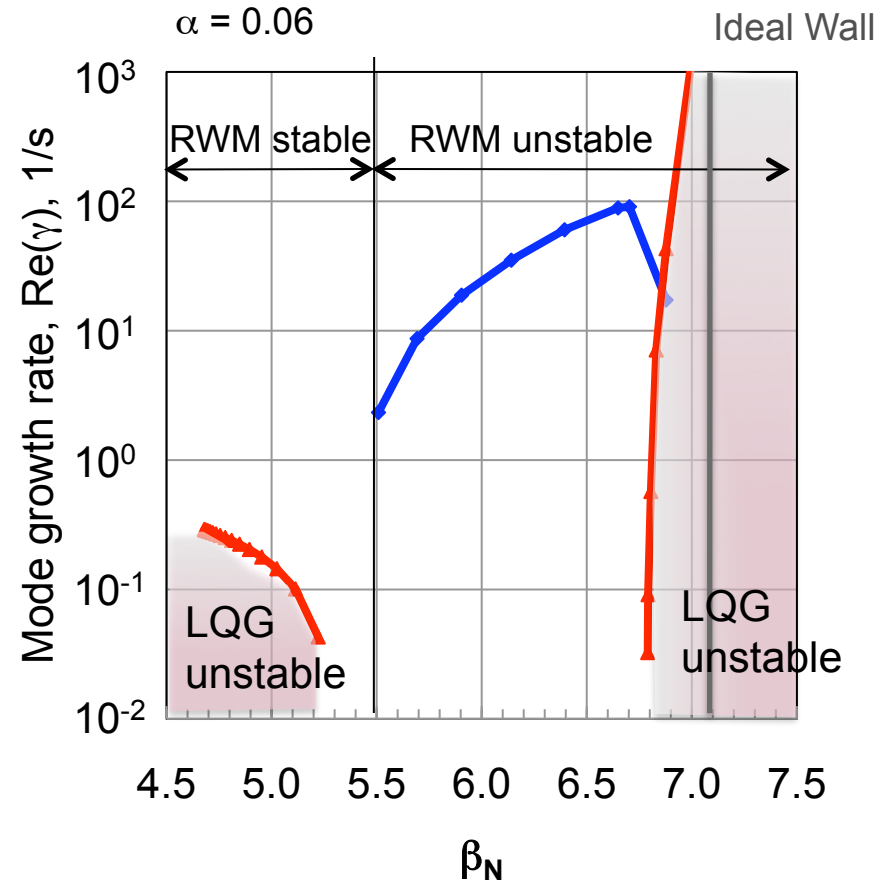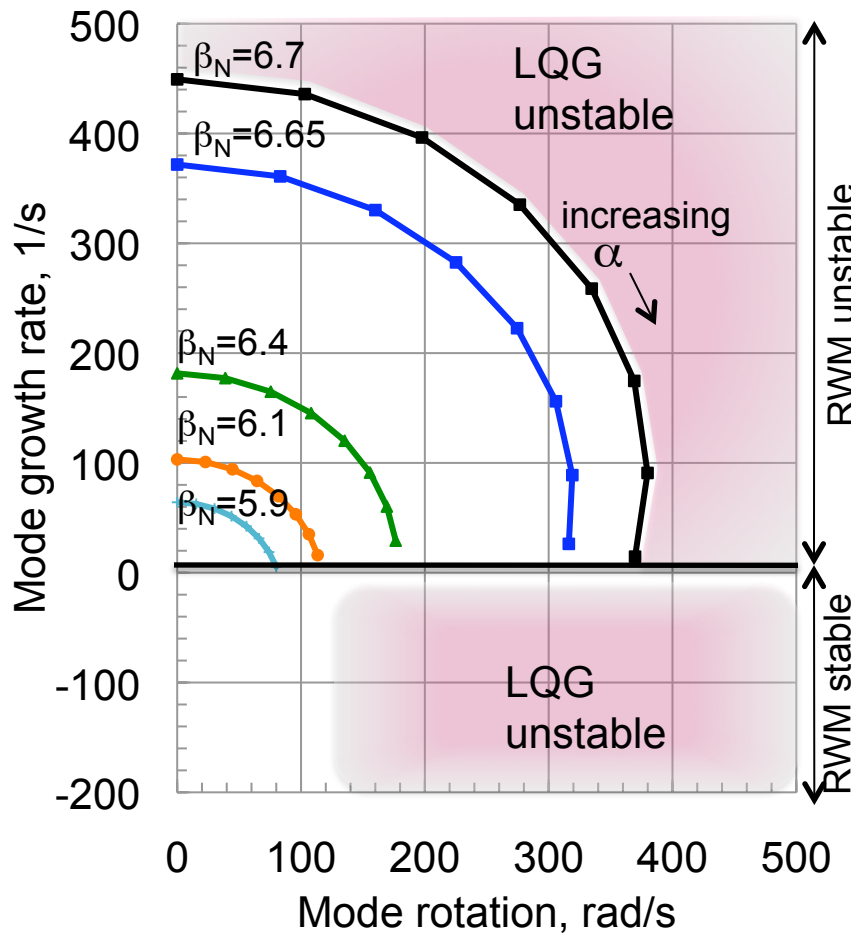

## >90% power reduction for white noise driven time evolution of the controlled RWM

- White noise 7 gauss in amplitude with 5kHz sampling frequency
- Power is proportional to white noise amplitude<sup>2</sup> and sampling frequency<sup>-1</sup>
- No filters on  $B_p$  sensors in proportional controller was used in this study

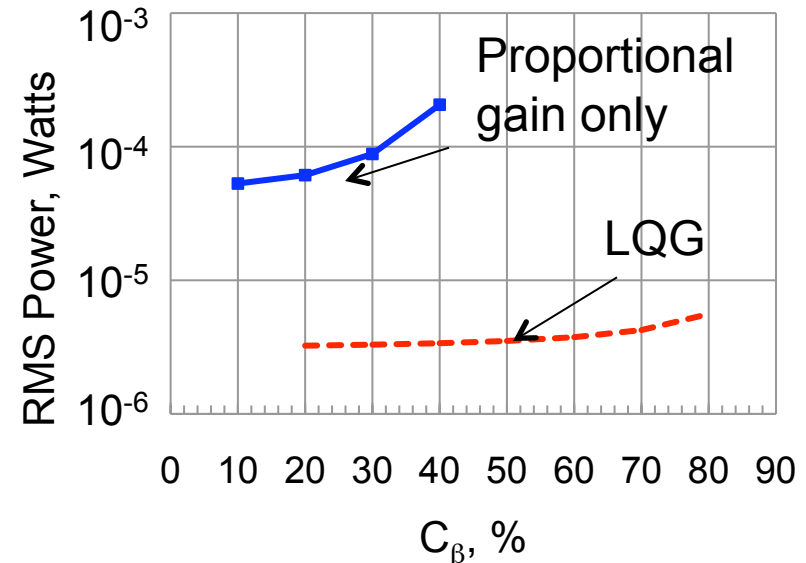

### RMS values

### Peak Values

$C_\beta$	<u>RMS values</u>			<u>Peak Values</u>		
	$I_{CC}, A$	$V_{CC}, V$	P, Watts	$I_{CC}, A$	$V_{CC}, V$	P, Watts
<b>10%</b>	70%	84%	94%	66%	84%	93%
<b>20%</b>	73%	85%	95%	68%	84%	94%
<b>30%</b>	77%	86%	96%	73%	85%	95%
<b>40%</b>	85%	90%	98%	82%	89%	98%

---

---

# Advanced controller study continuing...

- **Conclusions**

- NSTX advanced controller with mode phase has been tested numerically, 9 modes needed, large stability region for slow rotating mode. (RWM is usually locked in the NSTX experiments.)

- **Next Steps**

- Study LQG with different torque, to improve robustness with respect to  $\beta_N$  and mode rotation speed.
- Off line comparison for mode phase and amplitude calculated with reduced order optimal observer and the present measured RWM sensor signal data SVD evaluation of  $n = 1$  amplitude and phase from the experimental data
- Redesign state-space for control coil current controller input
- Analyze time delay effect on LQG performance

---

---

Thank you!