Neutral gas nozzle injector for improved fueling and plasma diagnostic

V. A. Soukhanovskii and NSTX Team

NSTX 5 Year Ideas Forum
24 - 26 June 2002
Princeton, NJ

Motivation

Fueling methods of NSTX

- Gas puff (present)
- Neutral beam injection (present)
- Pellet injection (future)
  - Edge (near future)
  - Core (future?)
- Compact toroid injection (future)

Assesment of NSTX fueling

- Gas puff fueling efficiency $\eta < 20$ %
- NBI fueling efficiency $\eta < 60$ %
- Recycling frequently dominates
- Impurity fueling efficiency is small

- Density control (profile, peaking factor) and pressure profile control (for HHFW and H-mode target, for MHD mode and transport control), automated feedback
- NSTX long pulse fueling methods
- Requirements to fueling method: high fueling efficiency, minimal contact of neutrals with PFC's, ionization source inside LCFS

Injector design and parameters

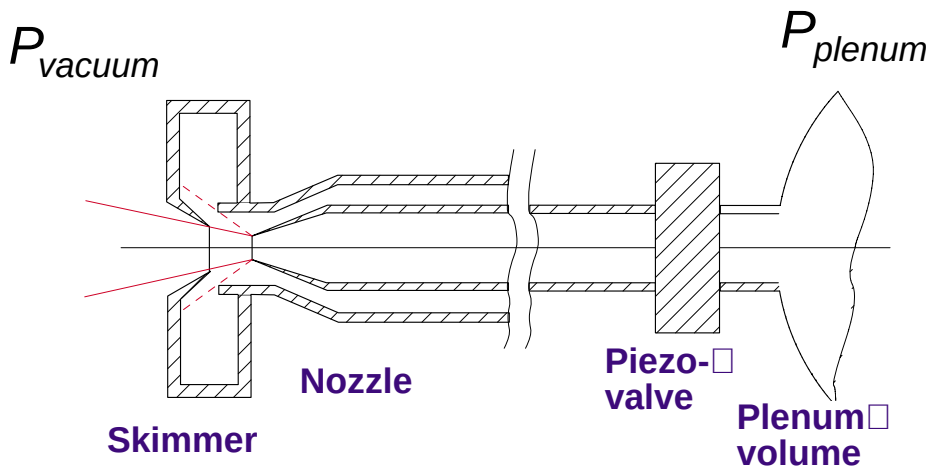

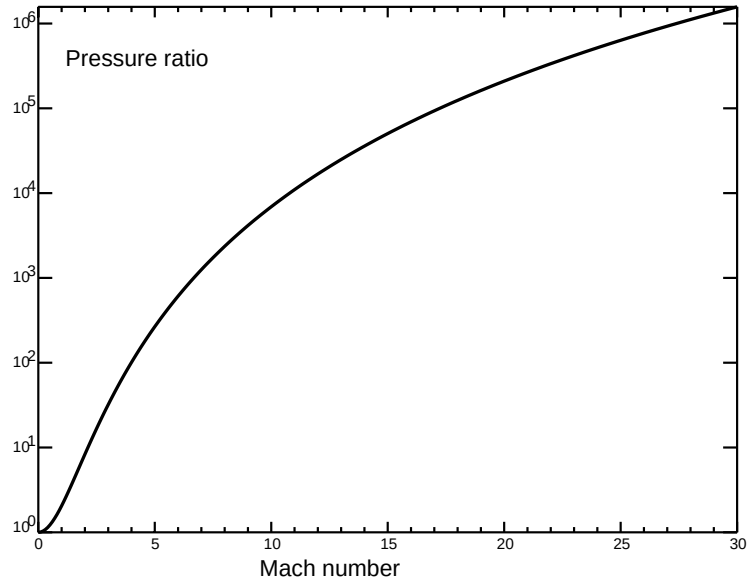

- Supersonic gas puff through nozzle: compressible flow of collimated beam of gas particles
- Estimated parameters: fueling rate 1 - 2 Torr l / s through mm nozzle (for pressure in plenum 2000 Torr) - Optimizations possible
- Similar designs have been used on TJ-1U torsatron (Madrid, Spain), HT-7, HL-1M tokamaks (China)

Applications

- Fueling and density control

  Main ionization source inside LCFS, collimated particle beam

- Particle transport studies

  - Impurity transport (inexpensive and simple alternative to laser blow-off system)

  - Cold pulse propagation experiments

  Delta function -like spatial and tempoal deposition profile

- SOL diagnostics: helium line intensity ratios for measuring electron temperature and density in the SOL (will work well with existing spectroscopy)