
A near term application of lithium walls to NSTX

R. Majeski, R. Kaita, R. Maingi, H. Kugel

Outline

- ◆ Introduction
 - The LTX approach to a nonrecycling wall
- ◆ NSTX implementation
 - Power handling limits
 - Particle pumping capability
- ◆ Test in CDX-U
- ◆ Summary


Introduction

- ◆ A flowing liquid lithium divertor target for NSTX is being considered
 - Present schedule calls for installation no earlier than 2008
- ◆ Lowered recycling *in the near-term* is desirable for NSTX
 - Cryopump
- ◆ However, a simple concept for implementing molten lithium walls has been developed for the LTX proposal
 - NOT A FLOWING LITHIUM SYSTEM
 - REQUIRED IN-VESSEL INVENTORY IS VERY SMALL
 - Plasma may transport lithium coatings onto windows
 - » Similar to carbon transport
 - But: no flow of bulk lithium required
- ◆ We can use the LTX wall concept to reduce recycling and Z_{eff} in NSTX

Reminder: What is LTX?

- ◆ Goal: an ST with <10% global recycling
- ◆ Approach: modify CDX-U to accomplish the LTX objectives
 - $R=40$ cm, $a=26$ cm, $\kappa=1.55$, $B_T=4$ kG, $I_p < 400$ kA (50 msec flattop)
- ◆ Install a low recycling wall
 - Capacity for full discharge duration plasma particle inventory
 - *Renewed* every discharge
- ◆ Employ lithium wall technology: thin films
 - Recoated between discharges
 - Plasma-aligned, heated wall (W or Mo sprayed copper shell)
 - Poloidal field, control system upgraded


Conformal molybdenum- or tungsten-sprayed cast chrome copper shell will form wall in LTX

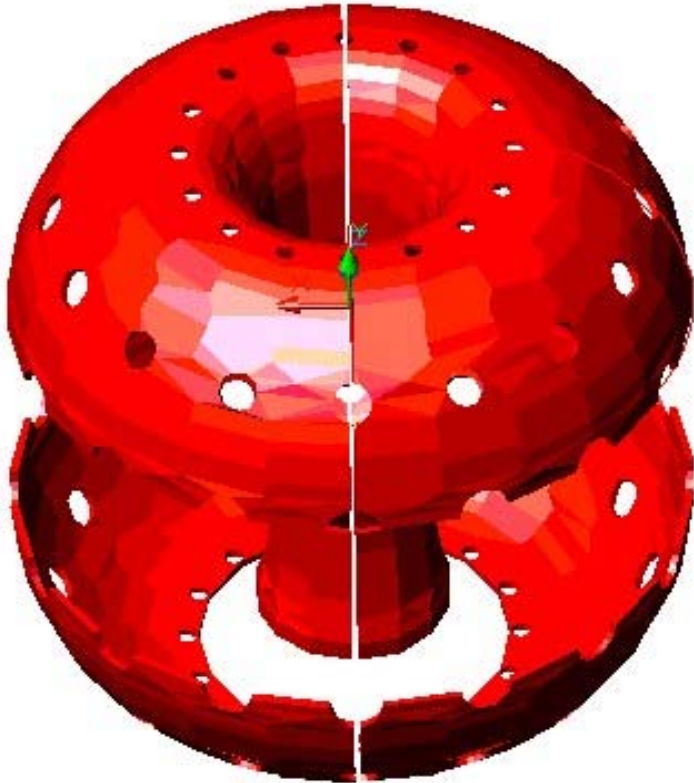

- ◆ LTX shell would be 1 cm thick chrome copper, heated to 200 - 250C.
 - Plasma-facing side would be flamesprayed moly or tungsten (6-7 mils)
 - Heating in LTX would use resistive elements
 - No shell cooling
- ◆ **Construction is similar to the NSTX stabilizing plates**

In LTX an e-beam system would deposit lithium on the tungsten (moly) coated copper wall *before every discharge*


Lithium-coated, heated, plasma-aligned first wall

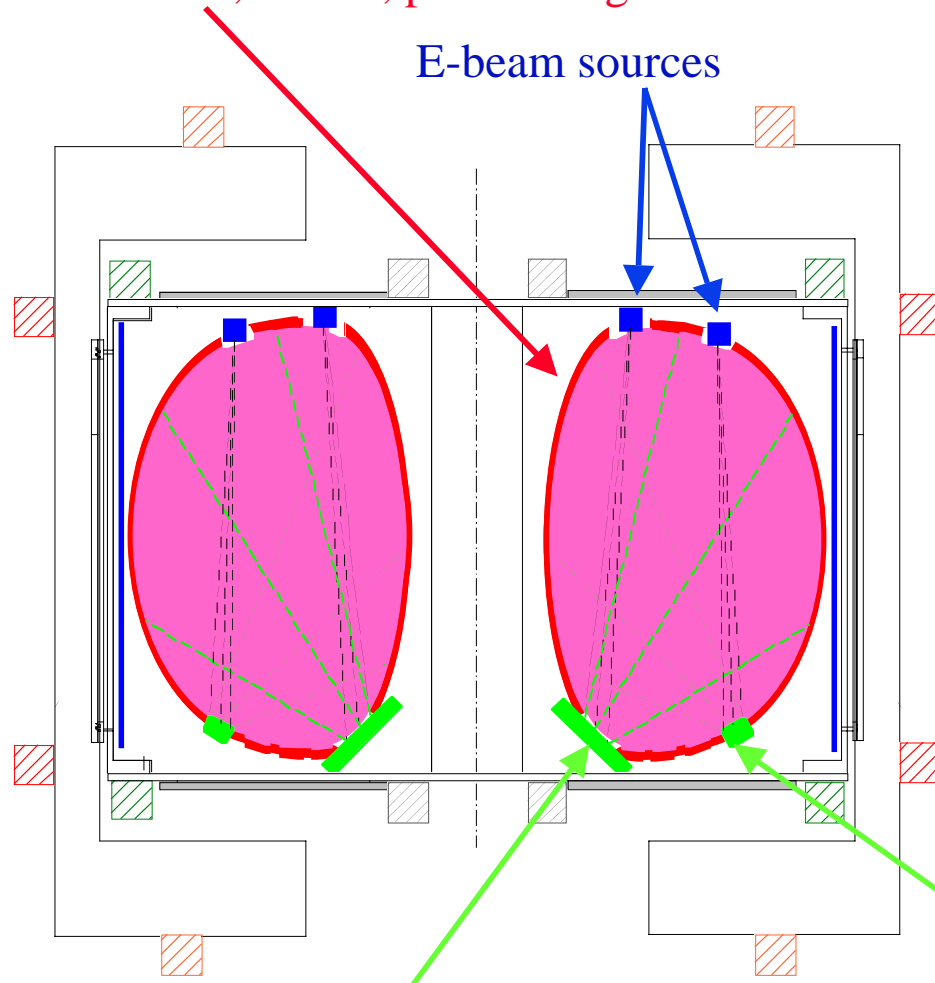

Recirculating lithium limiter- Plasma Technology
(used also as evaporation source)

- ◆ Electron-beam deposition
 - 100 - 1000 Å coating applied between discharges
 - Deposition rates of 1000 Å /40 sec. at 1 m radius *demonstrated*
 - » **NSTX relevant approach**
 - Self contained, insertable version also under development
 - » **NSTX relevant approach**
 - Wall temperature of ~ 200 °C - 250 °C will keep lithium coating molten
- ◆ Heat-conducting copper shell will reduce local temperature excursions
 - Limit evaporation

Self-contained deposition source is under development

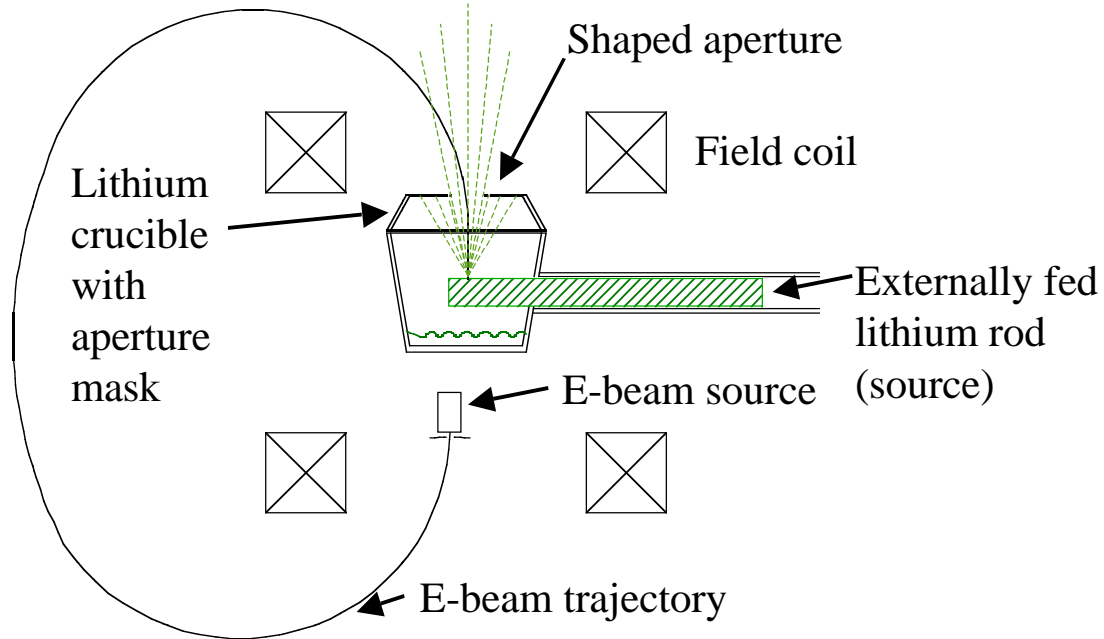


- ◆ Electromagnetic version of commercial (permanent magnet) source now in use
 - Allows adjustment of power density by varying ratio of coil currents
- ◆ Beam power densities of 250 MW/m^2 attainable
- ◆ Shroud crucible or physically scan source to produce desired deposition pattern
 - Defocussed beam can heat/clean aperture
- ◆ **Adaptable to NSTX (or even ITER)**

Graded approach to low recycling in NSTX

- ◆ First step: lithium pellet injection
 - Utilize lithium-carbon chemistry to reduce recycling
- ◆ Second step: heavier lithium coating of the carbon tiles
 - Utilize an LTX-like e-beam coater
- ◆ Third step: Install a *single* new passive plate
 - Flame sprayed moly over chrome copper
 - Apply lithium coatings between shots
- ◆ Finally:
 - Expand lithium coated passive plate system
 - Liquid lithium jet divertor (ALIST system)
- ◆ Important caveat for first two steps:
 - Edge of NSTX is NOT as hot as TFTR.
 - Sheath potential is much lower.
 - Ion implantation range is shallower.
 - » It is possible that lithium pellets and even the coating will not have as dramatic an effect on recycling as in TFTR

NSTX implementation

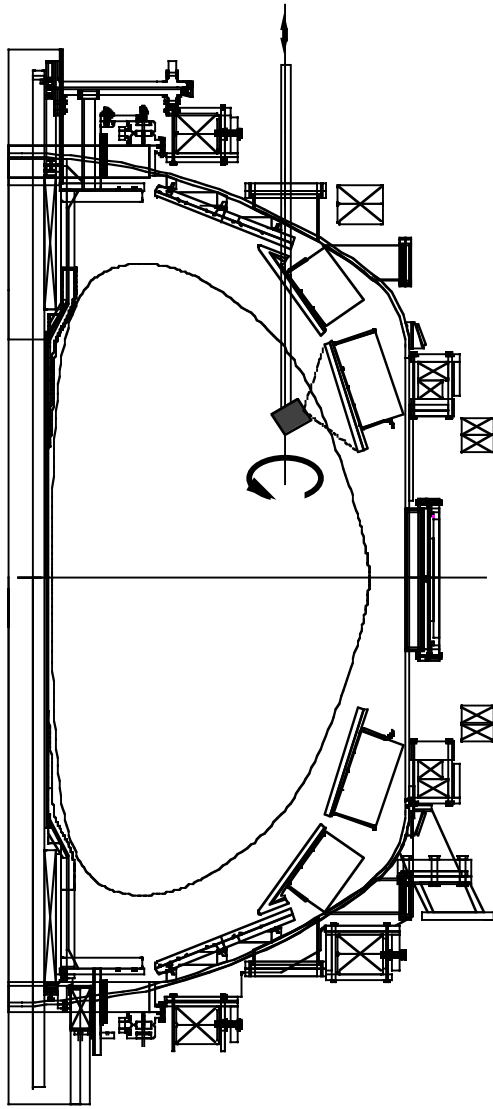

- ◆ Replace one of the passive stabilizing plates with a new plate, faced with plasma sprayed tungsten or moly
- ◆ Install an insertable e-beam system which can be scanned over the stabilizing plate
- ◆ Deposit 1000\AA of lithium and withdraw the e-beam system
 - Similar to the insertable getters used in PLT, PBX
 - But time scale is different
 - » Few 10's of seconds for 1000\AA coating
 - » Cycle time is dominated by insertion/removal of e-beam.
- ◆ Coat before *every shot*
 - 1000 shots \Rightarrow 0.1 mm accumulation
 - » Accumulation may be limited by evaporation

Power limits: stabilizing plates

- ◆ Replacement stabilizing plates: chrome-copper oversprayed with Mo or W, coated with lithium
 - 1000 applications of 1000Å lithium coating: 0.1 mm lithium
 - Underlayment of moly or tungsten: 0.15 mm
 - Neglect temperature differential across the coating+facing

- ◆ Temperature rise:

$$\Delta T = 2q_{wall} (W/cm^2) \sqrt{\frac{t}{\pi \kappa \rho_m C_p}}$$


- ◆ Or time-to-temperature: $t = 11.4 \left(\frac{\Delta T}{q_{wall}} \right)^2$

- ◆ For the wall:

- $T_{wall} \text{ (initial)} \sim 200\text{C}$
- $T_{wall} \text{ (final)} < 400\text{C}$


- ◆ *Uncooled* rise

- Use of active cooling will extend limits

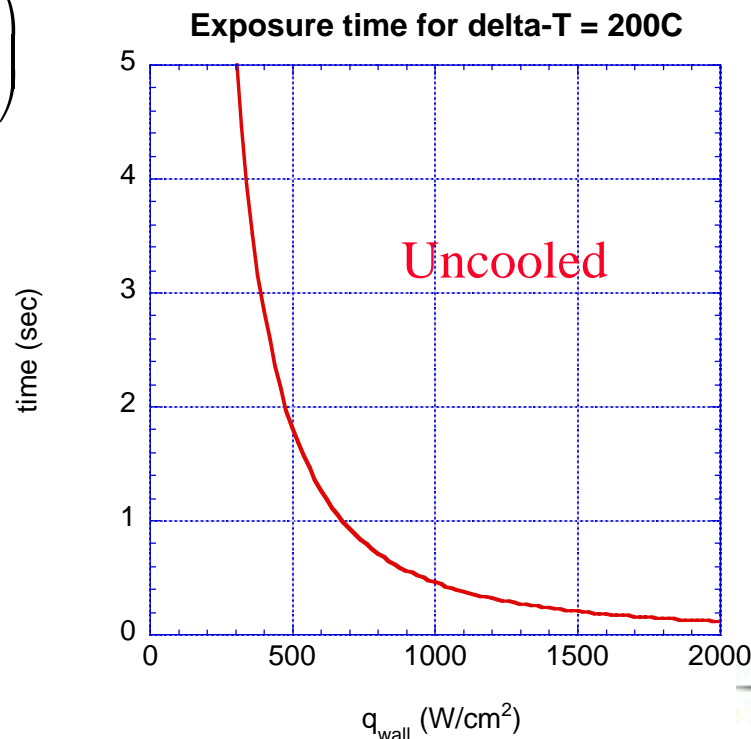


Power limits: divertor target plates

- ◆ Previously had not considered this technique for the divertor
- ◆ But: coated plate *is* viable in the divertor *if initial condition is solid lithium*
 - $T_{\text{wall}}(\text{initial}) \sim 20\text{C}$
 - $T_{\text{wall}}(\text{final}) \sim 500\text{C}$
 - » Higher temp. limit than wall
 - » Much larger ΔT
- ◆ *Uncooled rise*
- ◆ Sweeping the strike point would enable long discharges
- ◆ Present discharges do not require sweeping

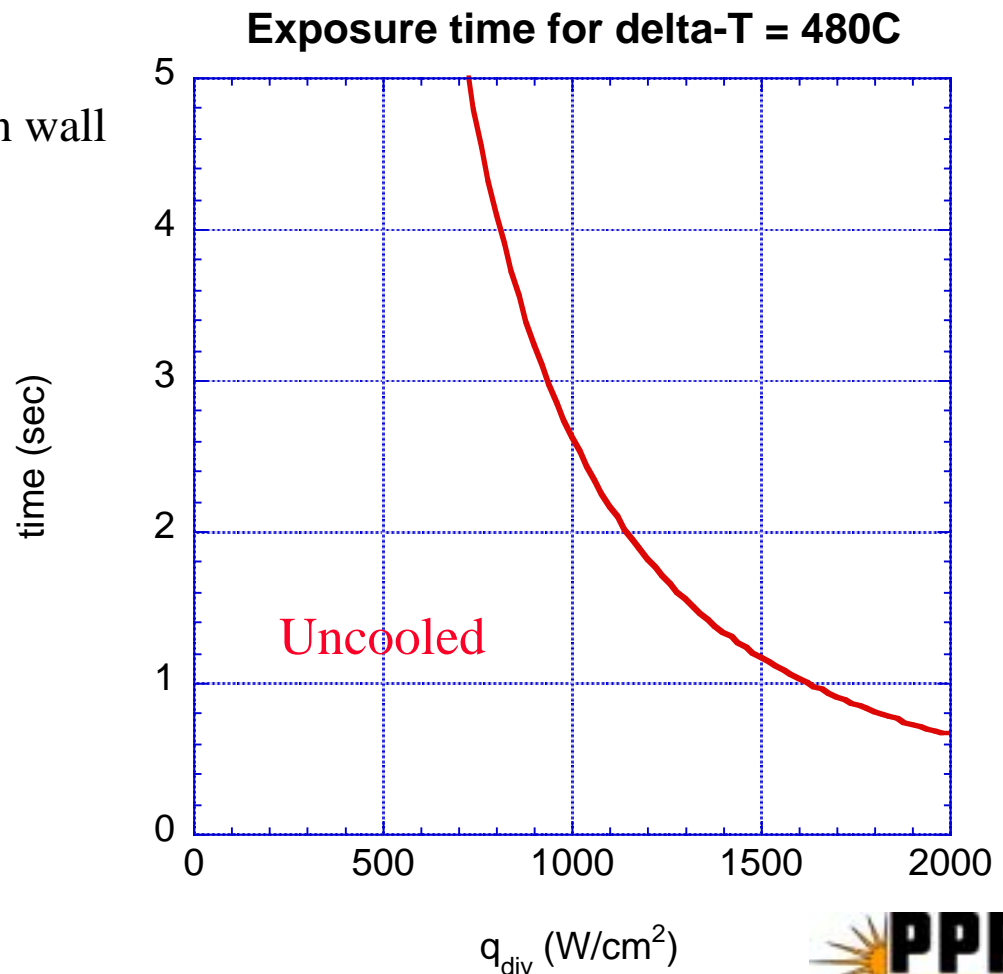


High capacity of liquid lithium to store deuterium demonstrated in PISCES-B experiments

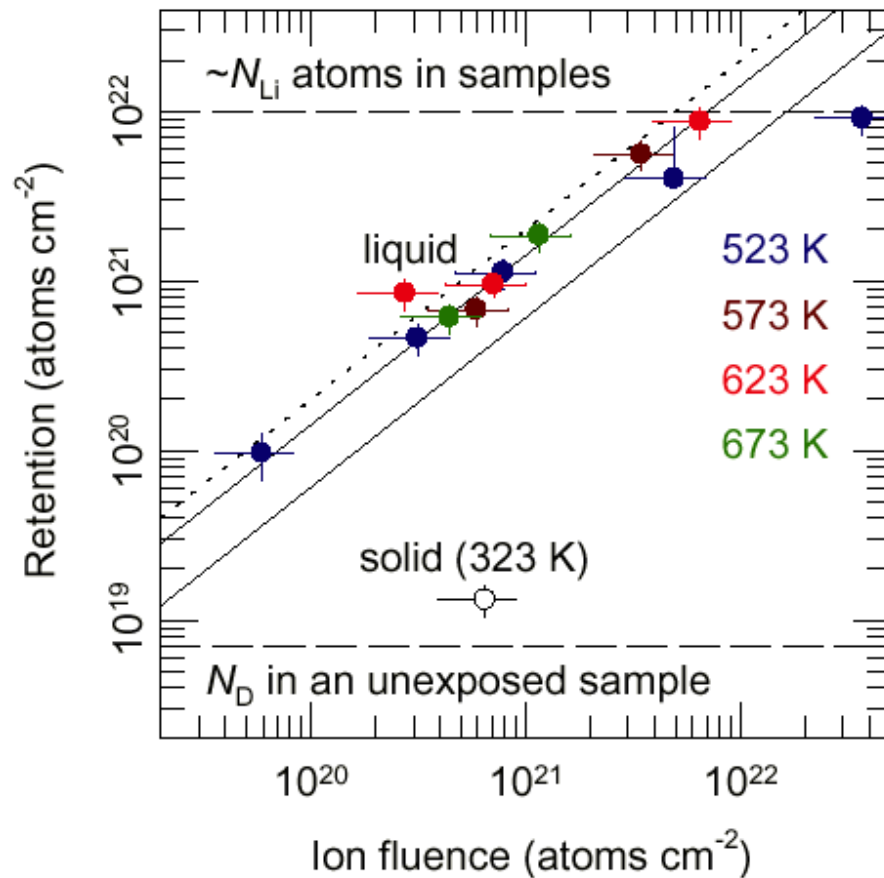

Results from T11-M (PP&CF 44, 955) showing deuterium desorption vs. capillary lithium limiter temperature

- ◆ Liquid lithium retains atomic deuterium up to a nearly 1:1 Li:D ratio
 - Deuterium is dissolved in the lithium; *does not form a stable deuteride*
 - High diffusivity precludes large surface concentration
- ◆ Coating will not saturate in a discharge
- ◆ “Bound” hydrogen can be liberated by heating
 - *Hydrogen (tritium!) retention may not be a problem*

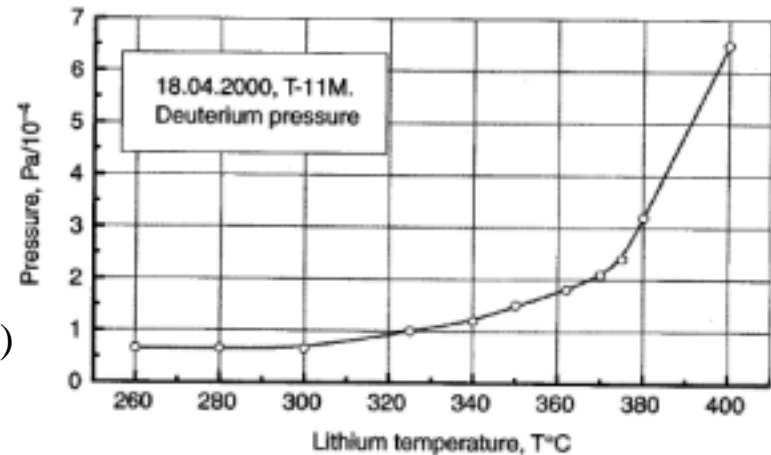

Particle pumping by the lithium coating


◆ Wall:

- Area of wall plates is $\sim 1.5 \times 10^5 \text{ cm}^2$.
- Volume of 1000Å coating: 1.5 cm^3 ($\sim 6 \times 10^{22}$ atoms)
- $\sim 6 \times 10^{20}$ particles in an NSTX discharge
- Wall has the capacity to pump the discharge for many particle confinement times

◆ Divertor:

- Area $\sim 3.6 \times 10^4 \text{ cm}^2$.
- 1.5×10^{22} atoms.
- Less capacity.
 - » Requires strike point sweeping for partial divertor pumping.
- Lithium jet system has an advantage in the divertor.

Coated wall will undergo test in CDX-U

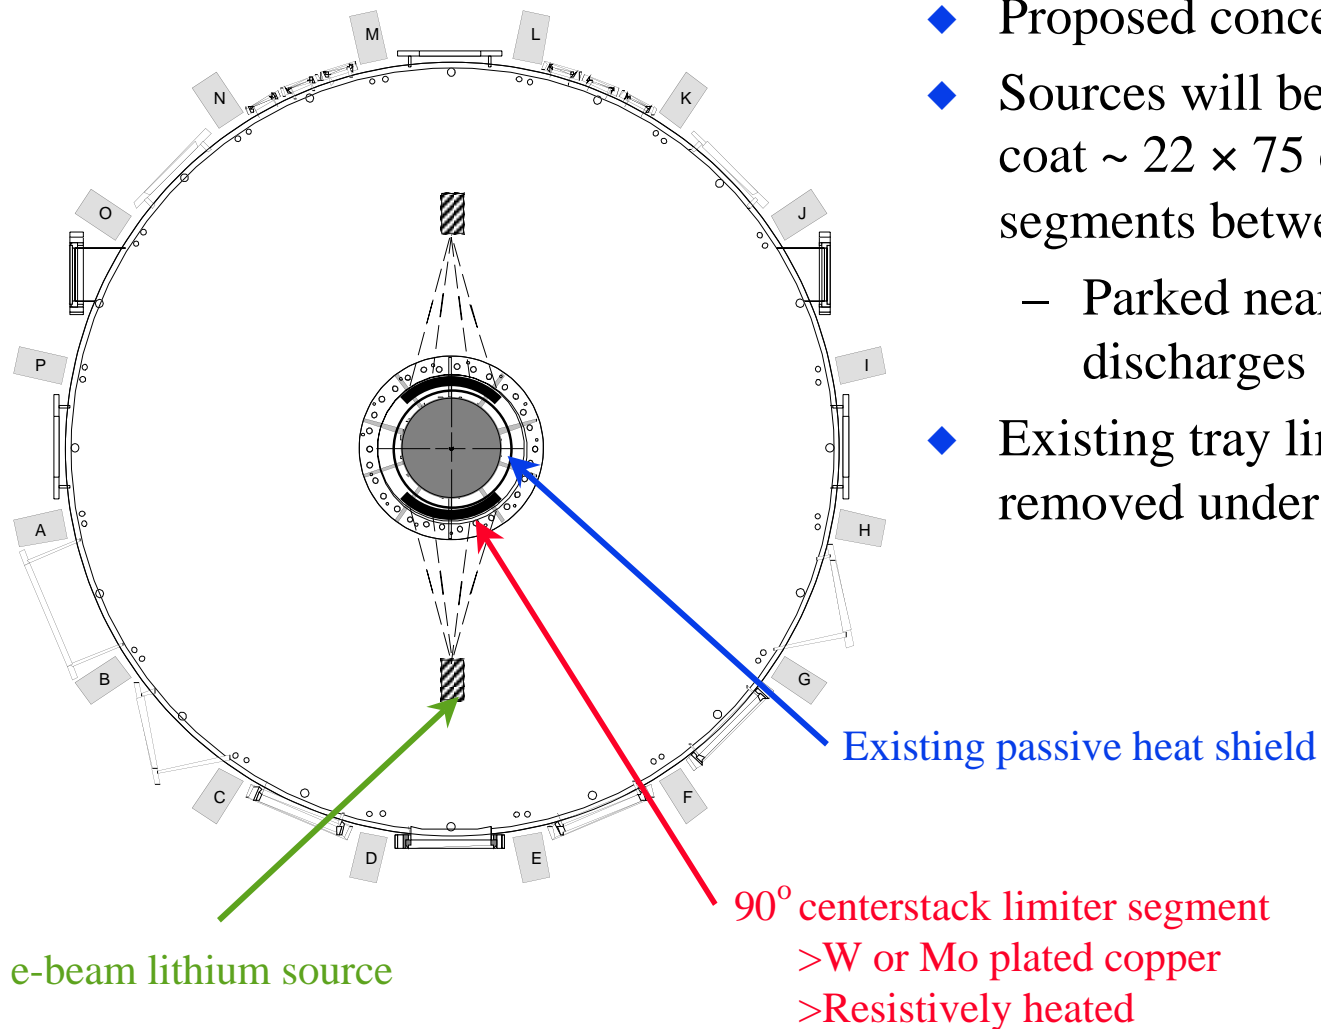

- ◆ Proposed concept test for FY04
- ◆ Sources will be vertically scanned to coat ~ 22 × 75 cm (W × H) limiter segments between shots
 - Parked near top of vessel during discharges
- ◆ Existing tray limiter will be removed under present plans

Summary

- ◆ Lithium coated walls are envisioned for LTX to eliminate recycling
 - Rapid, controlled e-beam application of a 1000Å lithium coating
 - Wall maintained at 200-250C
 - » Deuterium will dissolve in molten lithium
- ◆ Coated wall technology is applicable to NSTX
 - Power, particle handling is adequate for wall
 - Can be applied to divertor if strike point is swept
- ◆ Lithium coating is low Z
- ◆ Lithium coating will pump ALL the water
- ◆ Lithium coating will pump the edge plasma
 - Wall coating will be adequate to provide a pumping wall
 - Coating will provide some atomic hydrogen, ion pumping in the divertor
- ◆ *Impact on other systems should be minimal*