


XP804: Comparison of NTV among tokamaks ($n = 2$ fields, v_i scaling)

S.A. Sabbagh¹, R.E. Bell², J.W. Berkery¹, J.M. Bialek¹,
S. Gerhardt², B. LeBlanc², J.E. Menard², K. Tritz³

¹*Department of Applied Physics, Columbia University, New York, NY*

²*Plasma Physics Laboratory, Princeton University, Princeton, NJ, USA*

³*Johns Hopkins University, Baltimore, MD, USA*

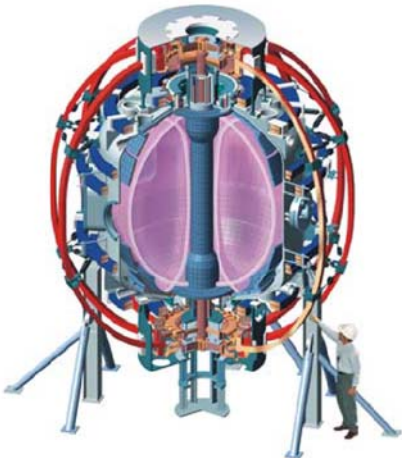

Macroscopic Stability TSG Review Meeting

January 10th, 2008

Princeton Plasma Physics Laboratory

Columbia U
Comp-X
General Atomics
INEL
Johns Hopkins U
LANL
LLNL
Lodestar
MIT
Nova Photonics
NYU
ORNL
PPPL
PSI
SNL
UC Davis
UC Irvine
UCLA
UCSD
U Maryland
U New Mexico
U Rochester
U Washington
U Wisconsin
Culham Sci Ctr
Hiroshima U
HIST
Kyushu Tokai U
Niigata U
Tsukuba U
U Tokyo
JAERI
Ioffe Inst
TRINITY
KBSI
KAIST
ENEA, Frascati
CEA, Cadarache
IPP, Jülich
IPP, Garching
U Quebec

XP804: Comparison of neoclassical toroidal viscosity (NTV) among tokamaks ($n = 2$ fields, v_i scaling)

● Goals

- Compare NTV results/analysis on NSTX to other devices
 - $n = 2$ data available JET, C-MOD, initial results in MAST (plan to submit 08 XP)
 - Proposal submitted in 2008 to DIII-D, morphed into different XP (running today!)
- Test NTV theory for $n = 2$ applied field configuration
 - $n = 2$ may be best for comparison to other devices ($n = 1$ strongest resonant rotation damping, $n = 3$ weak in some devices, many machines run $n = 2$)
 - Examine possible RFA effects by varying proximity to no-wall limit
- Investigate damping over widest possible range of ion collisionality to determine affect on rotation damping and compare to theory
 - Key for ITER, comparison to other devices important
- Supplement past published NSTX results (XP524) using $n = 1, 3$ fields
 - Modifications to theory to be examined (e.g. multiple trapping states)
 - Reversed I_p operation may allow ω_ϕ offset term measure (\sim few kHz)


● Addresses

- Joule milestone, leverages ST geometry
- ITER support (RWM coil design), ITPA joint experiment MDC-12



Observed rotation decrease follows NTV theory

$n = 3$ applied field configuration

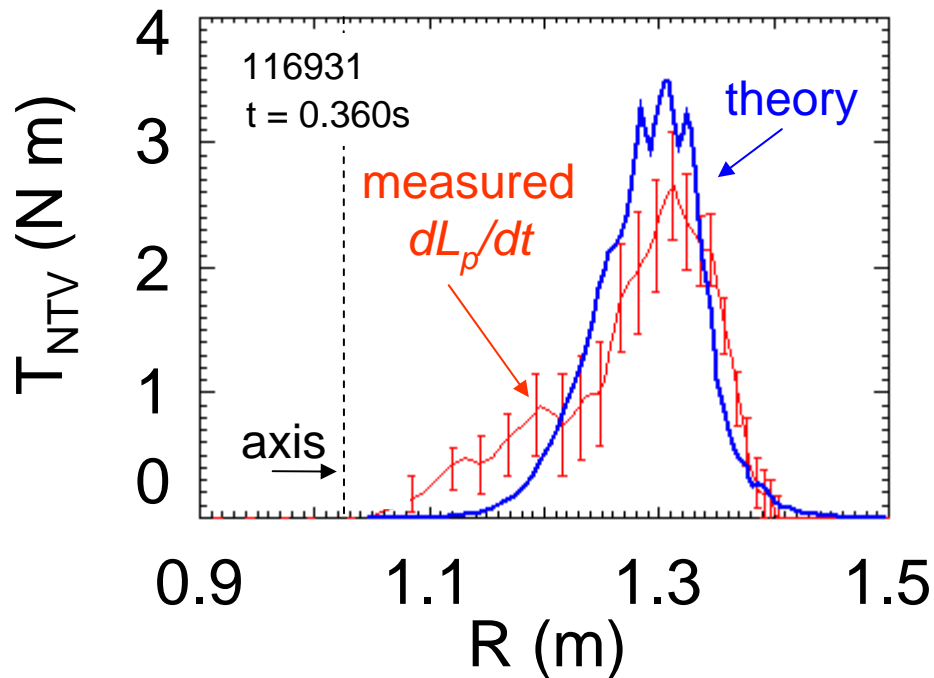


(Zhu, et al., PRL **96** (2006) 225002.)

- Further test NTV theory; compare to other devices
 - Trapped particle effects, 3-D field spectrum important for quantitative agreement
 - Scales as $\delta B^2 (p_i/v_i) (1/A)^{1.5}$
 - Low collisionality, v_i , ITER plasmas expected to have higher rotation damping
 - Saturation of $1/v_i$ scaling expected by theory, can it be found?
- Approach

- Use $n = 2$ field to slow ω_ϕ at low, high β_N (check RFA)
- Vary collisionality (as in past XPs) to produce \sim at least a factor of 2 variation in NSTX



Significant differences in $|B|$ between $n = 1, 2, 3$ applied field configurations

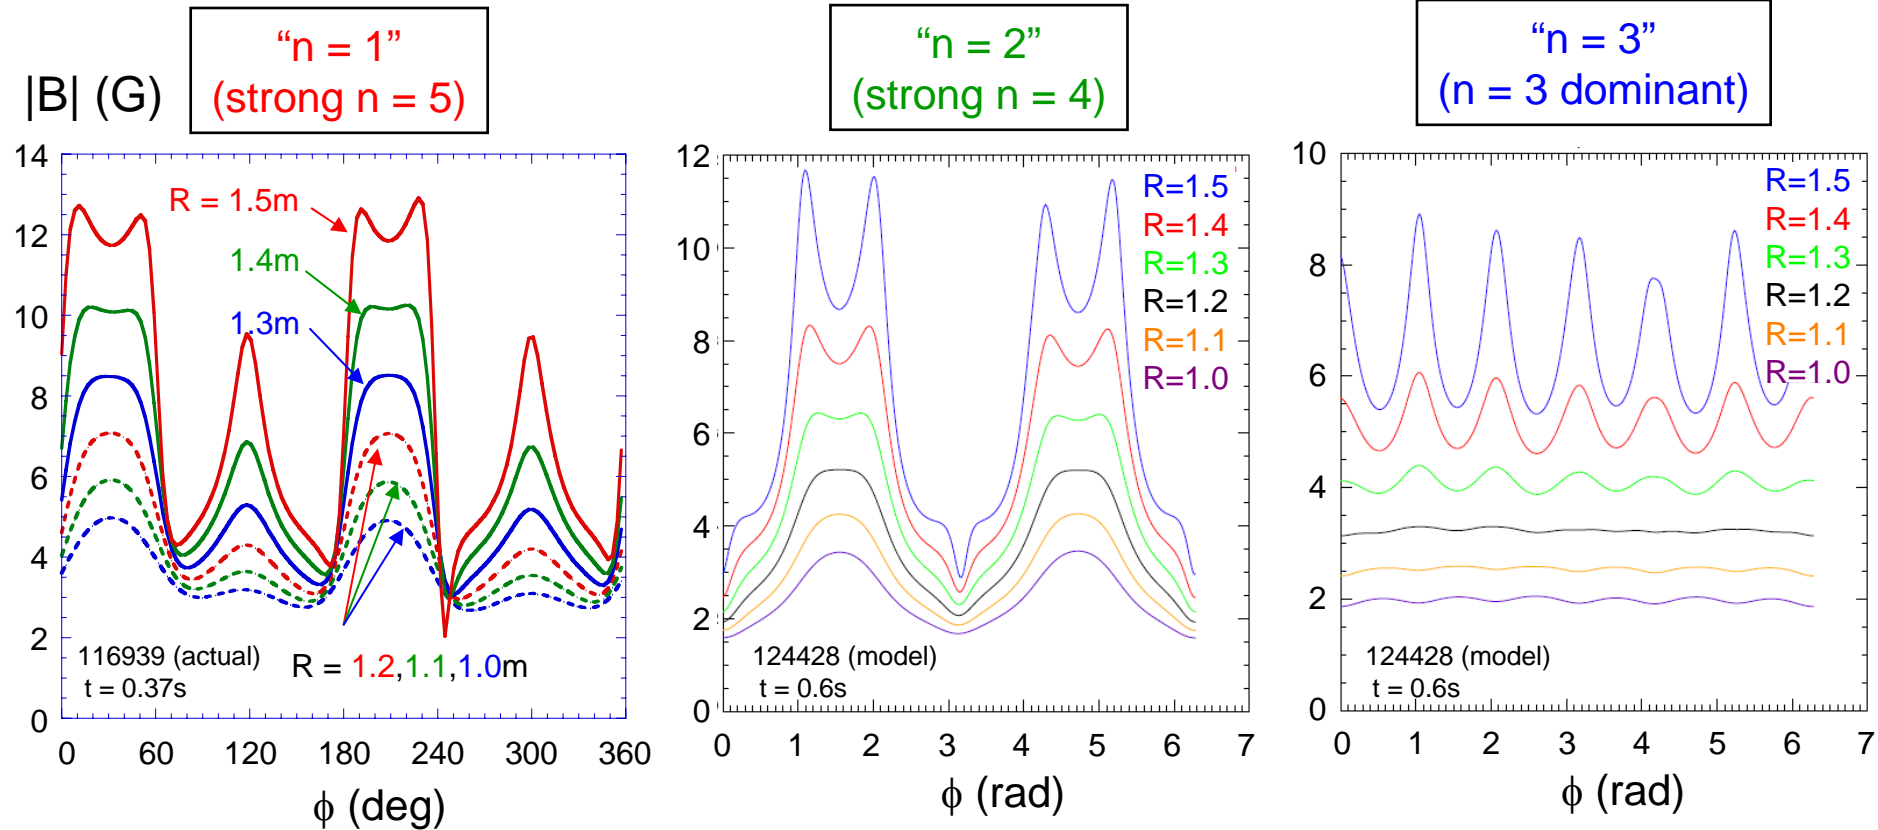


- Field more uniform vs. toroidal angle in higher n configuration
- Smaller n spectrum in higher n configuration

Broader field spectrum in $n = 2$ config vs. $n = 3$ config


“ $n = 3$ configuration”

Spectrum at $r/a=0.8$

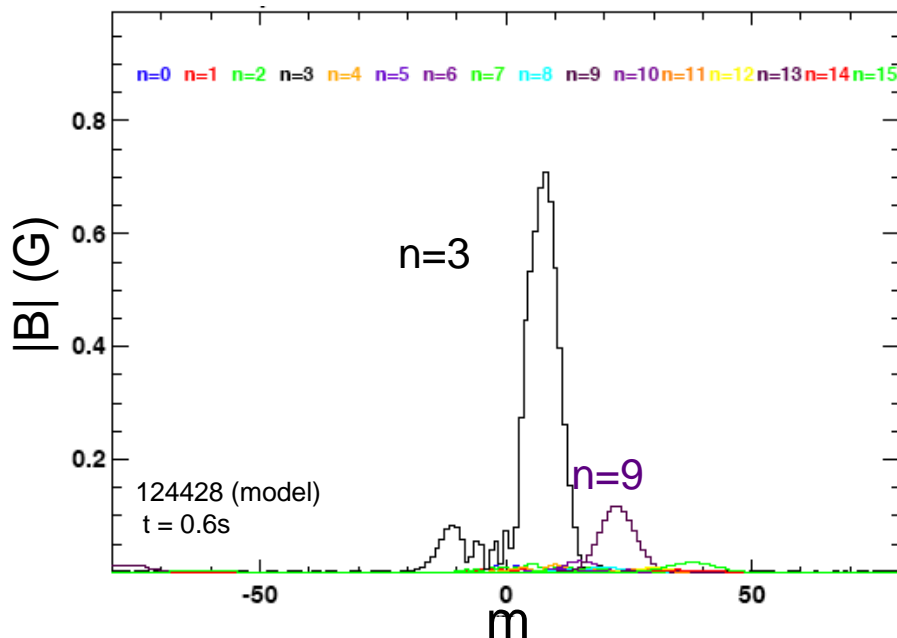

“ $n = 2$ configuration”

Spectrum at $r/a=0.8$

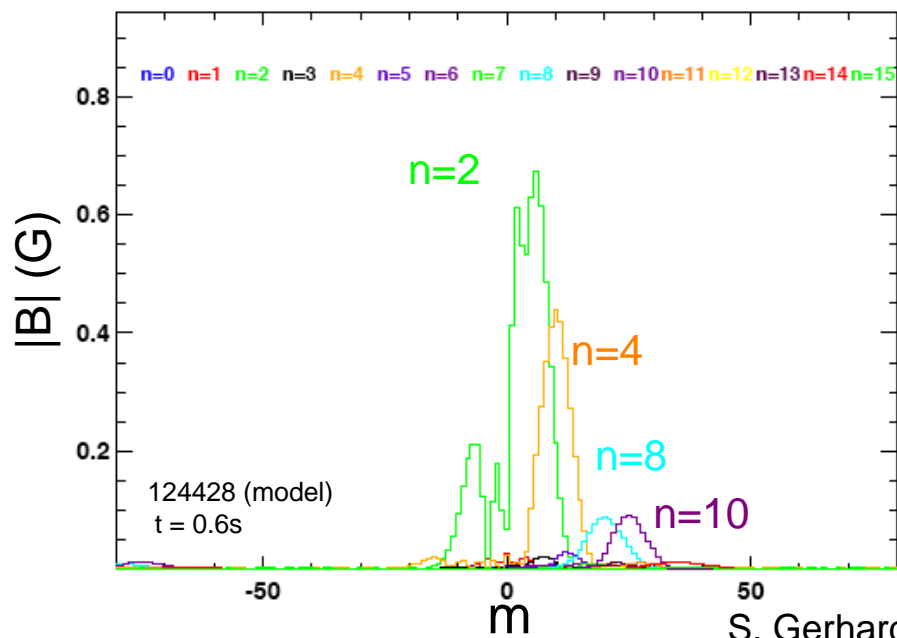

S. Gerhardt

- Broader spectrum and greater radial penetration should lead to larger NTV damping and extended radial profile
- $n = 2$ configuration has very small $n = 1$ component – reduces resonant braking and $n = 1$ NTV due to RFA



XP804: NTV $n = 2$ and v_i - Run plan

<u>Task</u>	<u>Number of Shots</u>
1) <u>Create targets (i) below, but near and (ii) above ideal no-wall beta limit (control shots)</u> (use 120038 as setup shot, 2 or 3 NBI sources, relatively high $\kappa \sim 2.4$ to avoid rotating modes)	
A) No $n = 2$ applied field; 3, 2, and 1 NBI source	3
2) <u>Apply $n = 2$ field</u>	
A) Step up $n = 2$ currents during discharge in 75ms steps, 3 NBI sources	2
B) Step up $n = 2$ currents during discharge in 75ms steps, 1 or 2 NBI sources	2
C) $n = 2$ DC pulse at steady ω_ϕ , measure spin down, pulse off to measure ω_ϕ spin-up, 3 NBI	3
D) $n = 2$ DC pulse at steady ω_ϕ , measure spin down, pulse off to measure ω_ϕ spin-up, 1 or 2 NBI	3
3) <u>Ion collisionality scan</u>	
A) Vary v_i at constant q , apply $n = 2$ field during period free of strong rotating modes	8
B) Increase $n = 2$ field at collisionality where damping is weakest	3
4) <u>Reversed I_p scans</u>	
A) Repeat scans 1 and 2 above in reversed I_p	13
<hr/>	
Total (standard I_p ; reversed I_p): 24 ; 13	

XP804: NTV $n = 2$ and v_i - Diagnostics

- Required diagnostics / capabilities

- Ability to operate RWM coils in $n = 2$ configuration
- Internal RWM sensors
- CHERS toroidal rotation measurement
- Thomson scattering
- USXR
- MSE
- Toroidal Mirnov array / between-shots spectrogram with toroidal mode number analysis
- Diamagnetic loop

- Desired diagnostics

- FReTip
- Fast camera

