

# Wave Heating and Current Drive TSG: XMP/XPs for the 2015 NSXT-U Campaign

**N. Bertelli**

*for RF-TSG*


R.J. Perkins, J. C. Hosea

Theory & Modeling: N. Bertelli

Univ. Rep: P. Bonoli

**January 22, 2015**

*Coll of Wm & Mary  
Columbia U  
CompX  
General Atomics  
FIU  
INL  
Johns Hopkins U  
LANL  
LLNL  
Lodestar  
MIT  
Lehigh U  
Nova Photonics  
ORNL  
PPPL  
Princeton U  
Purdue U  
SNL  
Think Tank, Inc.  
UC Davis  
UC Irvine  
UCLA  
UCSD  
U Colorado  
U Illinois  
U Maryland  
U Rochester  
U Tennessee  
U Tulsa  
U Washington  
U Wisconsin  
X Science LLC*

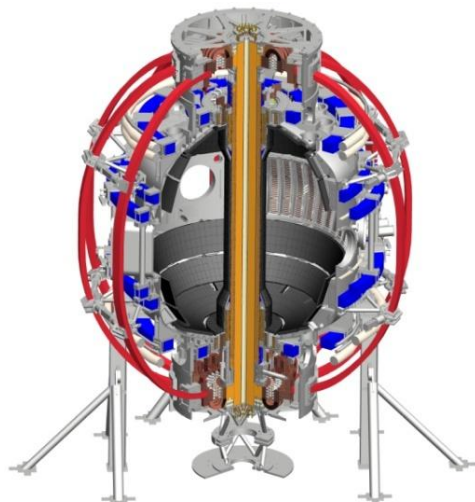

*Culham Sci Ctr  
York U  
Chubu U  
Fukui U  
Hiroshima U  
Hyogo U  
Kyoto U  
Kyushu U  
Kyushu Tokai U  
NIFS  
Niigata U  
U Tokyo  
JAEA  
Inst for Nucl Res, Kiev  
Ioffe Inst  
TRINITI  
Chonbuk Natl U  
NFRI  
KAIST  
POSTECH  
Seoul Natl U  
ASIPP  
CIEMAT  
FOM Inst DIFFER  
ENEA, Frascati  
CEA, Cadarache  
IPP, Jülich  
IPP, Garching  
ASCR, Czech Rep*

# RF group: first year goals

- Establish a good power coupling in L- and H-mode plasmas (w/ and w/o NBI):
  - characterize RF power losses in the SOL for range of edge conditions and plasma scenarios
  - higher  $B_T$  ( $\sim 0.65$  T) & recent changes in antenna grounding should help
  - contribute to R(16-3)
- Characterize HHFW absorption in NBI-heated plasma
  - collaboration with EP TSG
  - contribute to R(16-3)
- Generate fully non-inductive  $I_p \sim 300$  kA H-mode plasma with HHFW:
  - collaboration with SFSU TSG
  - if there is sufficient FW power attempt to ramp  $I_p$  from 250 to 400 kA
- Measure O-X-B coupling with synthetic aperture microwave imaging (SAMI):
  - collaboration with York U. & CCFE

# XMP/XPs for RF in the first 2 run months (weeks 1-8)

- XMP for commissioning the HHFW System
  - RF conditioning into vacuum after boronization
  - RF conditioning into vacuum after lithium application
  - RF conditioning into plasma w & w/o NBI
    - Determine plasma antenna gap acceptable for outer NB operation
- RF XPs
  - RF heating in the core vs. SOL region w/ & w/o NBI
  - Ion absorption by HHFW in NBI-heated plasmas

# XMP: Bring HHFW System online and operate into plasma

- Evaluate performance and condition antenna to maximum voltage:
  - Verify phase and amplitude control, arc control, and plasma current inhibit
  - Compare voltage limits and performance in multiple plasma configurations
  - Monitor plasma heating utilizing magnetics and Thomson Scattering
- Need to evaluate heat load of 2<sup>nd</sup> NB on HHFW limiter:
  - Both with and without applied HHFW power
- Evaluate voltage standoff before and after lithium/boron conditioning
- Expect XMP will require 4-5 days during weeks 1-8

# XPs for weeks 5-8: RF heating in the core vs. SOL region and ion absorption

- RF heating in the core vs. SOL region w/ & w/o NBI:
  - Depends also on available diagnostics (incl. IR cameras, probes, edge reflectometer, etc.,...)
  - Will require ~ 1 day, some data maybe acquired during HHFW XMP
- HHFW ion absorption in NBI-heated plasma:
  - w/ and w/o 2<sup>nd</sup> NBI
  - Will require ~ 1 day (in combination with EP TSG XP)

# Preliminary list of XPs requiring HHFW, some in collaboration with other TSGs/SGs (weeks 5 - 18)



Lead Author(s)	Title	Collaborating TSG(s)
G. Taylor	HHFW Ramp Up of Inductively Initiated Plasma from 250 to 400 kA	Solenoid-Free Start-Up + RF TSGs
J. Hosea, R. Perkins	Study HHFW Power Coupling Versus ELM activity	
G. Taylor	Low Plasma Current Fully Non-Inductive HHFW H-Mode	Solenoid-Free Start-Up + RF TSGs
G. Taylor	HHFW Heating of CHI-initiated Plasma	Solenoid-Free Start-Up + RF TSGs
J. Hosea	Turbulence Characteristics for HHFW Saturated Stored Energy versus RF power	Transport and Turbulence + RF TSGs
N. Bertelli, M. Podestà, B. LeBlanc	HHFW absorption in NBI-Heated plasmas	Energetic Particles + RF TSGs
Energetic particles & RF TSGs	Effects of HHFW on toroidal rotation (core and edge)	Energetic particles + RF TSGs
Pedestal & RF TSGs	Impact of HHFW of edge/pedestal turbulence	Pedestal structure and control + RF TSGs
Energetic particles & RF TSGs	Suppression of energetic particle driven instabilities with HHFW heating	Energetic particles + RF TSGs
RF TSG + others	FWCD for core q profile control and MHD avoidance	RF TSG + others
Particle control TF + RF TSG	Impact of HHFW on impurity	Particle control TF + RF TSG
N. Bertelli	HHFW CD measurements by MSE and code validation	

# FY2015-16 research milestones target exploitation of new capabilities, exploration of new regimes


Incremental (full ops)

Expt. Run Weeks:

Previous center-stack    **New center-stack**



Present NBI    **New 2nd NBI**

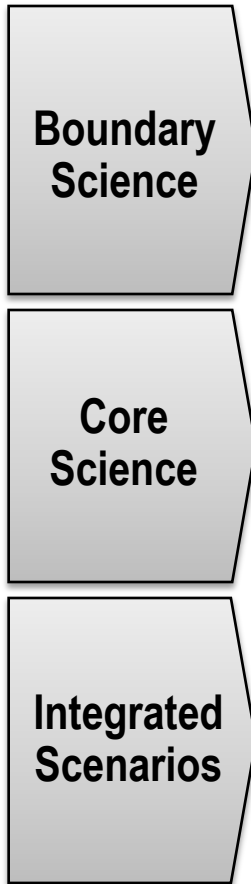

**FES 3 Facility Joint Research Target (JRT)**

FY2015	
12	<b>14</b>
R15-1	
Assess H-mode confinement, pedestal, SOL characteristics at higher $B_T$ , $I_p$ , $P_{NBI}$	
Develop snowflake configuration, study edge and divertor properties	
IR15-1	
R15-2	
Assess effects of NBI injection on fast-ion $f(v)$ and NBI-CD profile	
R15-3	
Develop physics + operational tools for high-performance discharges ( $\kappa$ , $\delta$ , $\beta$ , EF/RWM)	
NSTX-U leads JRT	
Quantify impact of broadened $J(r)$ and $p(r)$ on tokamak confinement and stability	

FY2016	
16	<b>20</b>
R16-1	
Assess scaling, mitigation of steady-state, transient heat-fluxes w/ advanced divertor operation at high power density	
R16-2	
Assess high-Z divertor PFC performance and impact on operating scenarios	
IR16-1	
Assess confinement and local transport and turbulence at low $\nu^*$ with full range of $B_T$ , $I_p$ , and NBI power	
R16-3	
Assess fast-wave SOL losses, core thermal and fast ion interactions at increased $B_T$ , $I_p$	
R16-4	
Develop high-non-inductive fraction NBI H-modes for ramp-up & sustainment	
C-Mod leads JRT	
Assess disruption mitigation, initial tests of real-time warning and prediction techniques	