The Motional Stark Effect (MSE) Diagnostic for the National Spherical Torus Experiment (NSTX)

F. M. LEVINTON

NOVA PHOTONICS, INC.

Presented at the 8^{th} International ST Workshop

November 18 - 21, 2002

Princeton, NJ

Principle of the Motional Stark Effect

Nova Photonics, Inc.

- Based on $\vec{E} = \vec{v} \times \vec{B}$ electric field induced by propagation of a neutral beam across a magnetic field.
- Electric field causes spectral splitting and linear polarization of the emitted radiation known as the Stark effect.
- Background plasma causes excitation of neutral beam atoms and Doppler shifted emission (H_α).
- Good beam penetration.
- Good spatial resolution-intersection of sight-line with neutral beam.

Stark Spectra from TFTR

Nova Photonics, Inc.

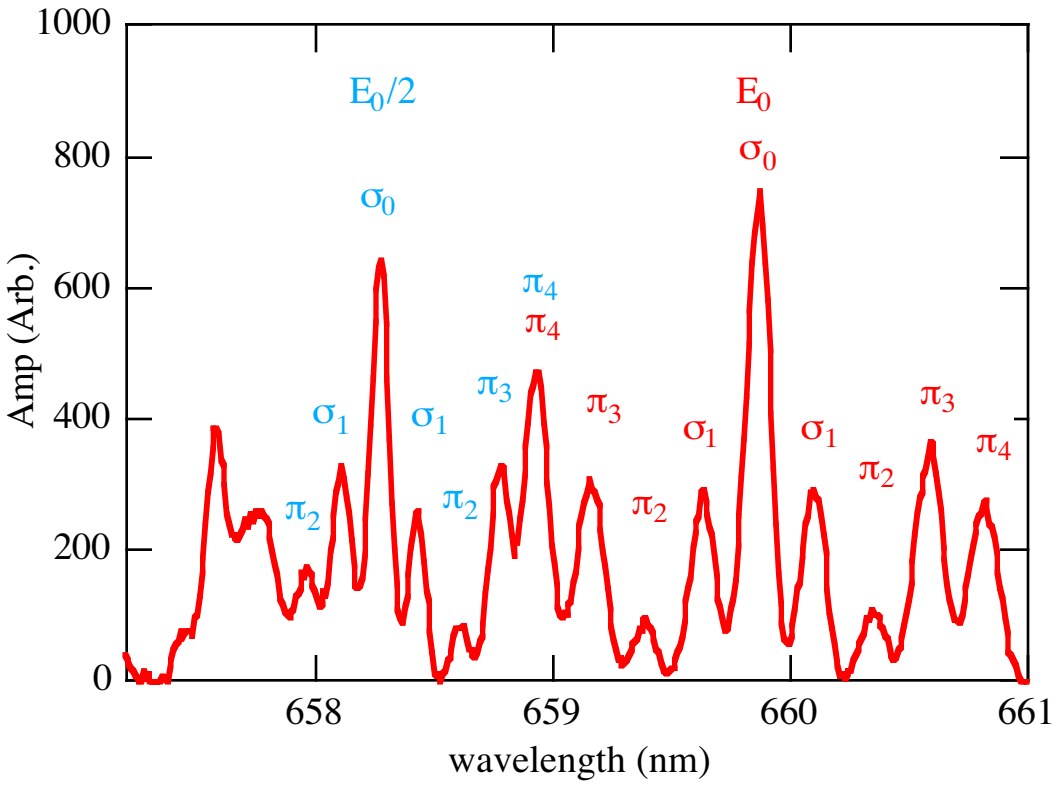

- $\vec{E} = \vec{v} \times \vec{B}$ electric field is $\sim$ 200 kV/cm at 4.5 T, resulting in a large spectral splitting.
- $\Delta m = 0(\pm 1)$, $\pi(\sigma)$ component, are polarized parallel (perpendicular) to the electric field.
- Spectral linewidth is determined by geometric broadening and beam temperature.
- Spectral overlap between π and σ lines reduces polarization fraction and signal-to-noise.

Low Polarization Fraction at Low Field

Nova Photonics, Inc.

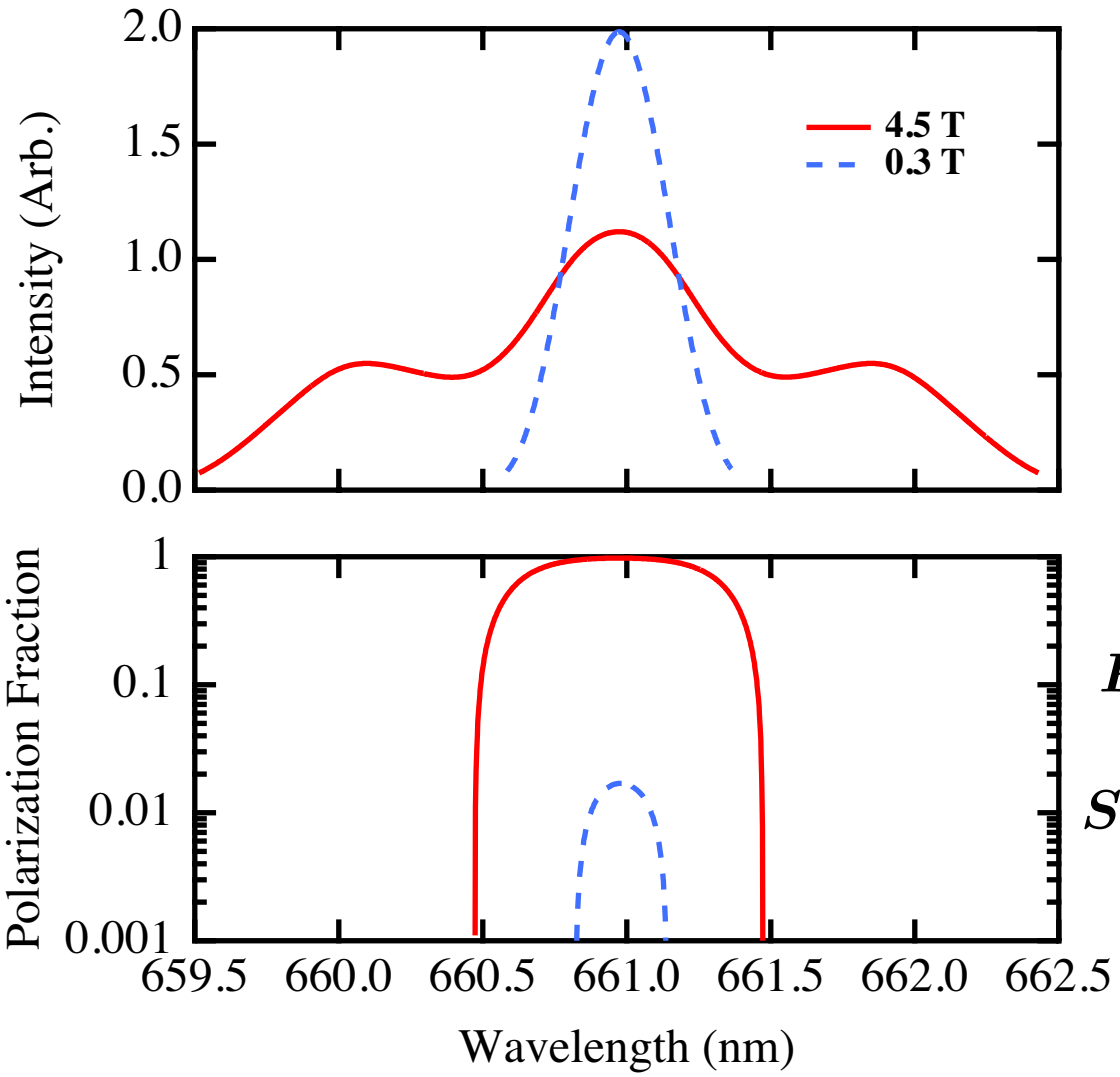

$$P_f = \frac{I_{\parallel} - I_{\perp}}{I_{\parallel} + I_{\perp}}$$

$$S/N \propto P_f \sqrt{N}$$

- Numerical convolution of the MSE spectra including filter, beam, and optics broadening.
- At 4.5 T there is a good separation of the π and σ components. At 3 kG overlap of spectral lines leads to a low polarization fraction.

MSE at Low Magnetic Field

Nova Photonics, Inc.

Two different approaches to extend MSE to low magnetic fields.

1. **Optimize optics to reduce geometric spectral broadening.**
   - **Spectral broadening is from the finite optics and image size. Optimization of the optics can reduce the spectral width.**
   - **Development of high resolution, high throughput filter to extend measurements to ~ 0.3 T.**
2. **Laser induced fluorescence (LIF).**
   - **Optically pump $n = 2 \longrightarrow n = 3$ and observe fluorescence with separate optical system.**
   - **This is estimated to work at fields as low as ~ 0.1 T.**

Proposed MSE-LIF Layout on NSTX

Nova Photonics, Inc.

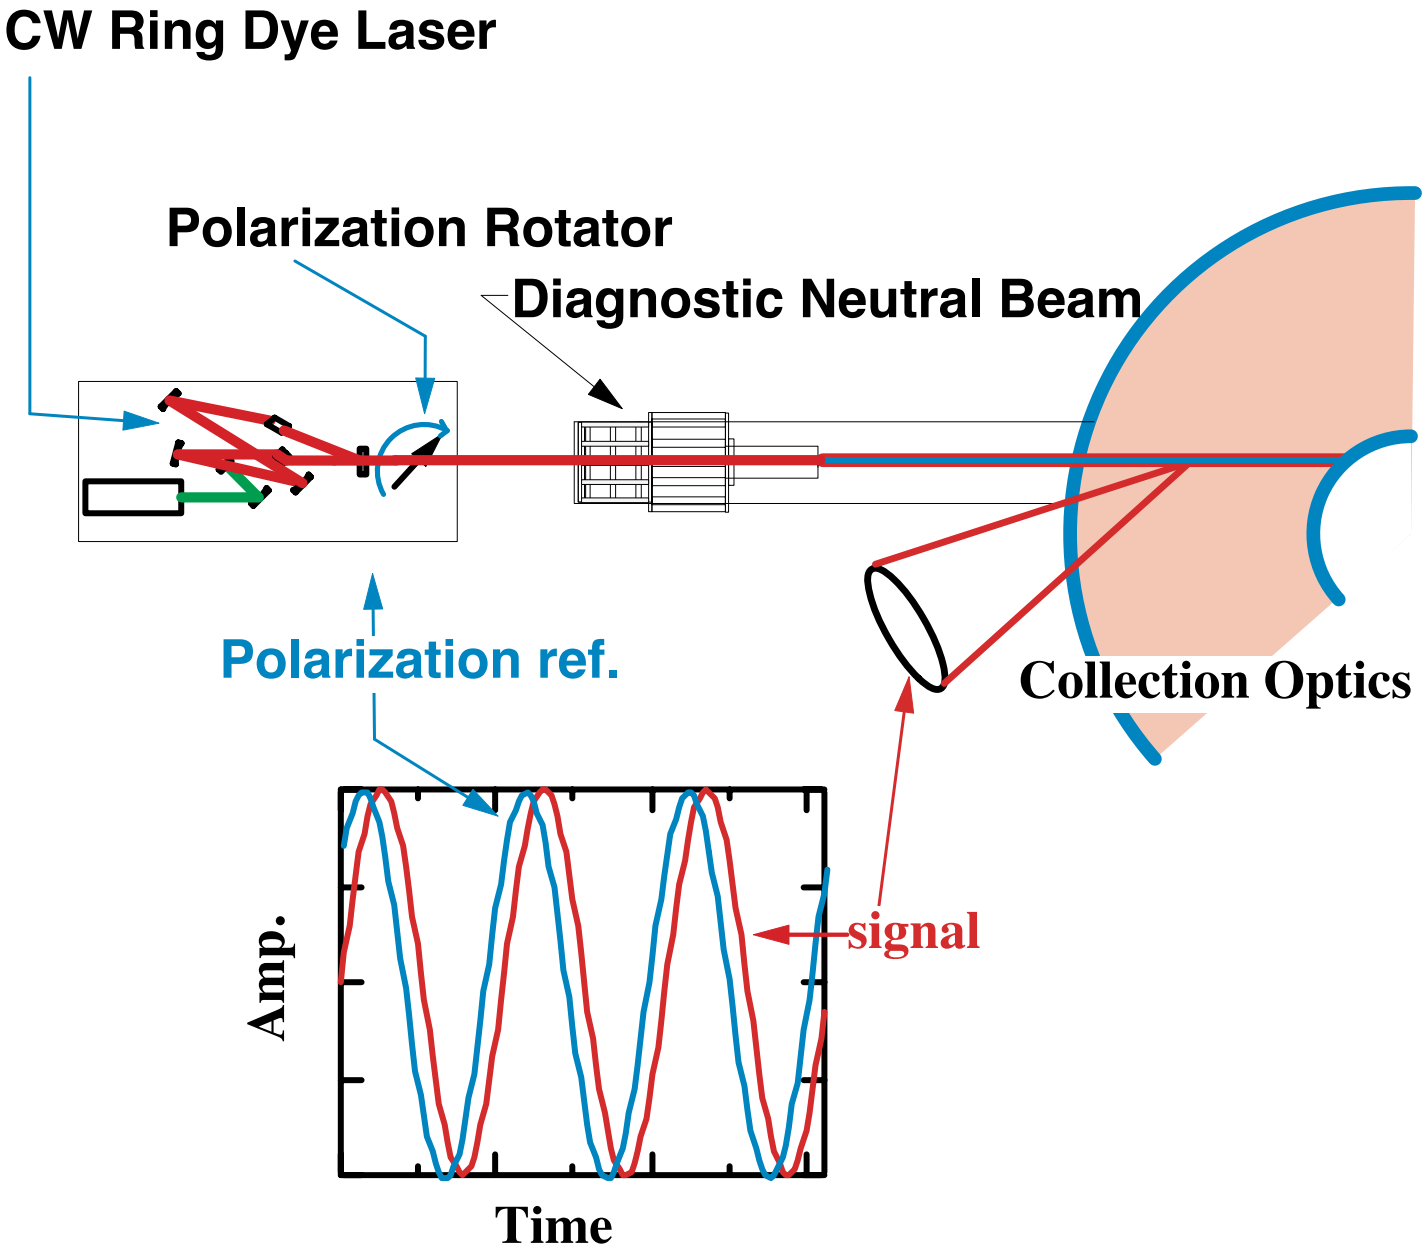

MSE-LIF Diagnostic Development

Nova Photonics, Inc.

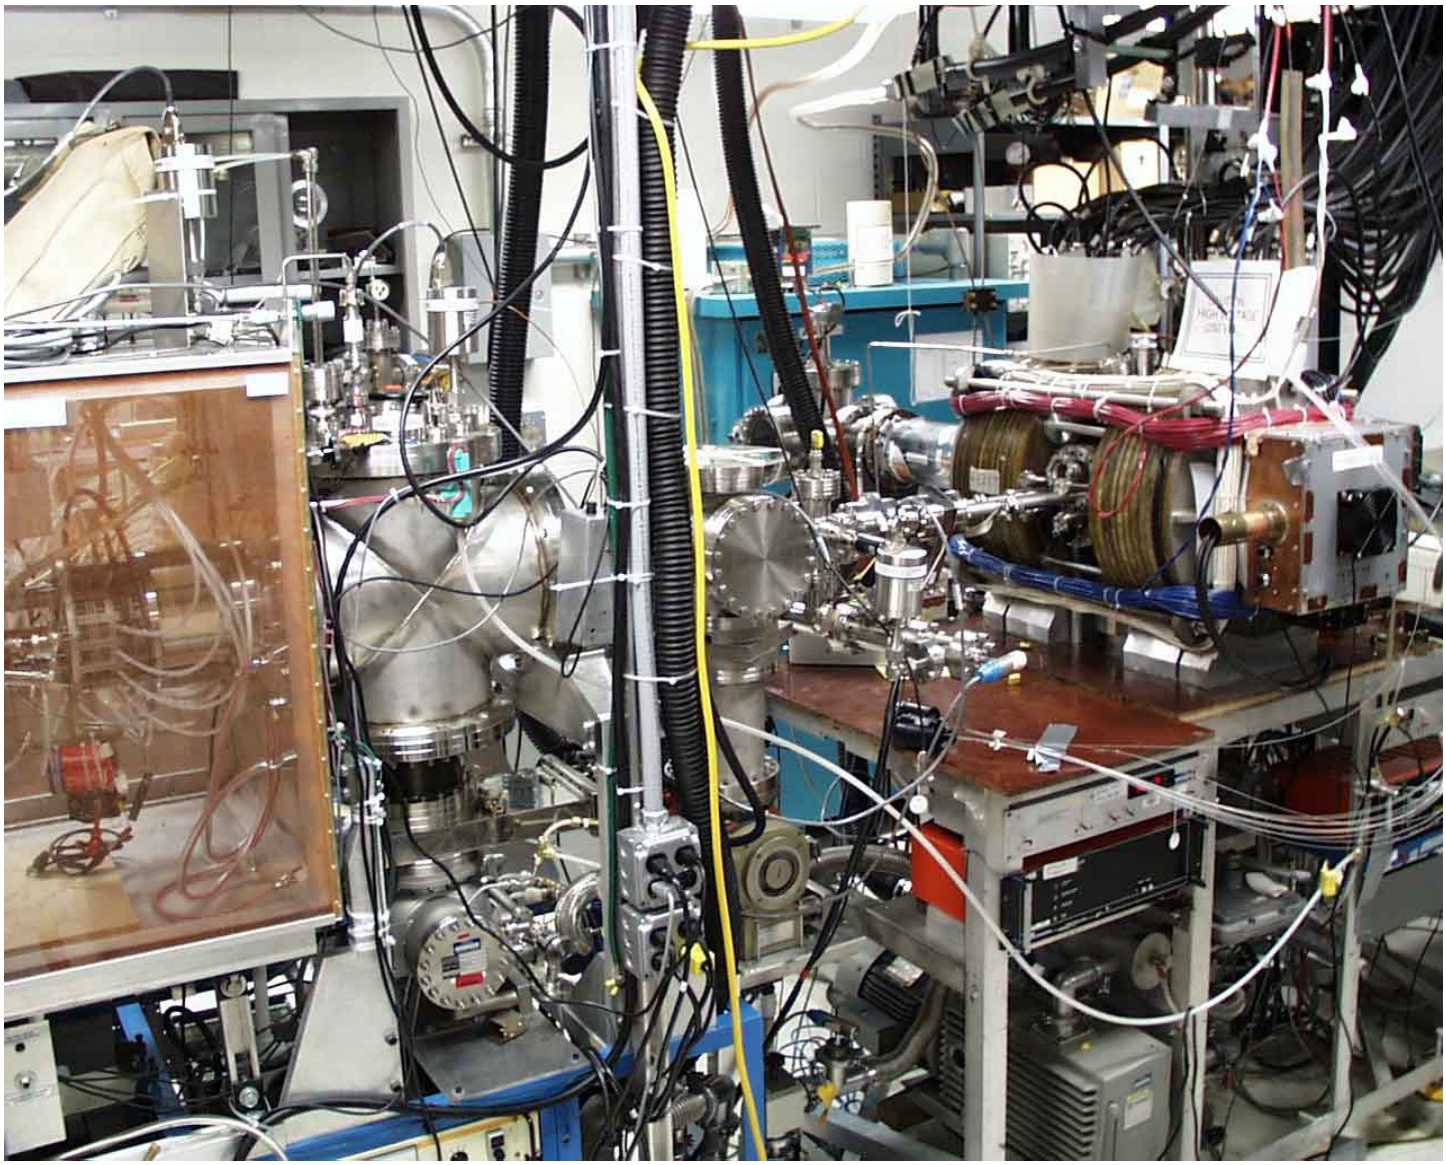

- MSE-LIF development in laboratory.
- Utilizes helicon plasma source for testing and proof of principle.

RF Source with External Antenna

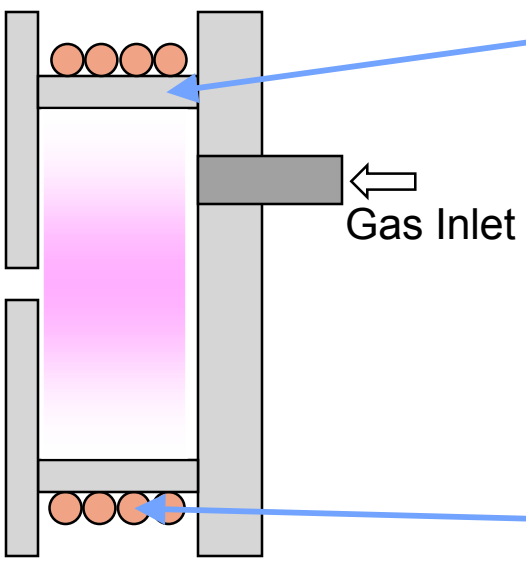

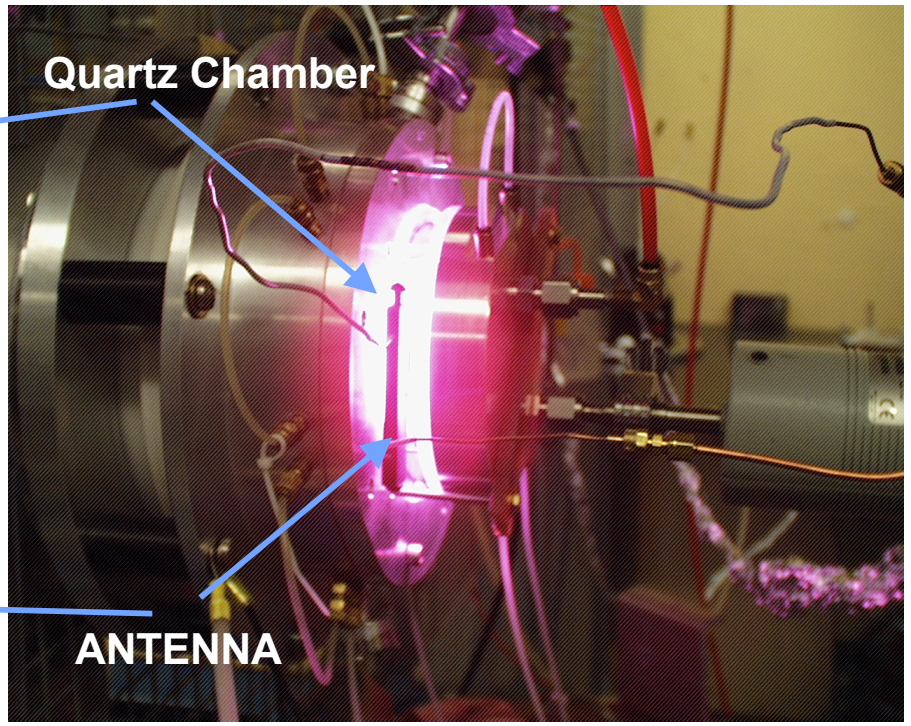

Hydrogen plasma at 1 kW RF power

- Low power
- Low contamination
- Scalable to large size
- Long lifetime for antenna

Reduction of Geometric Broadening

Nova Photonics, Inc.

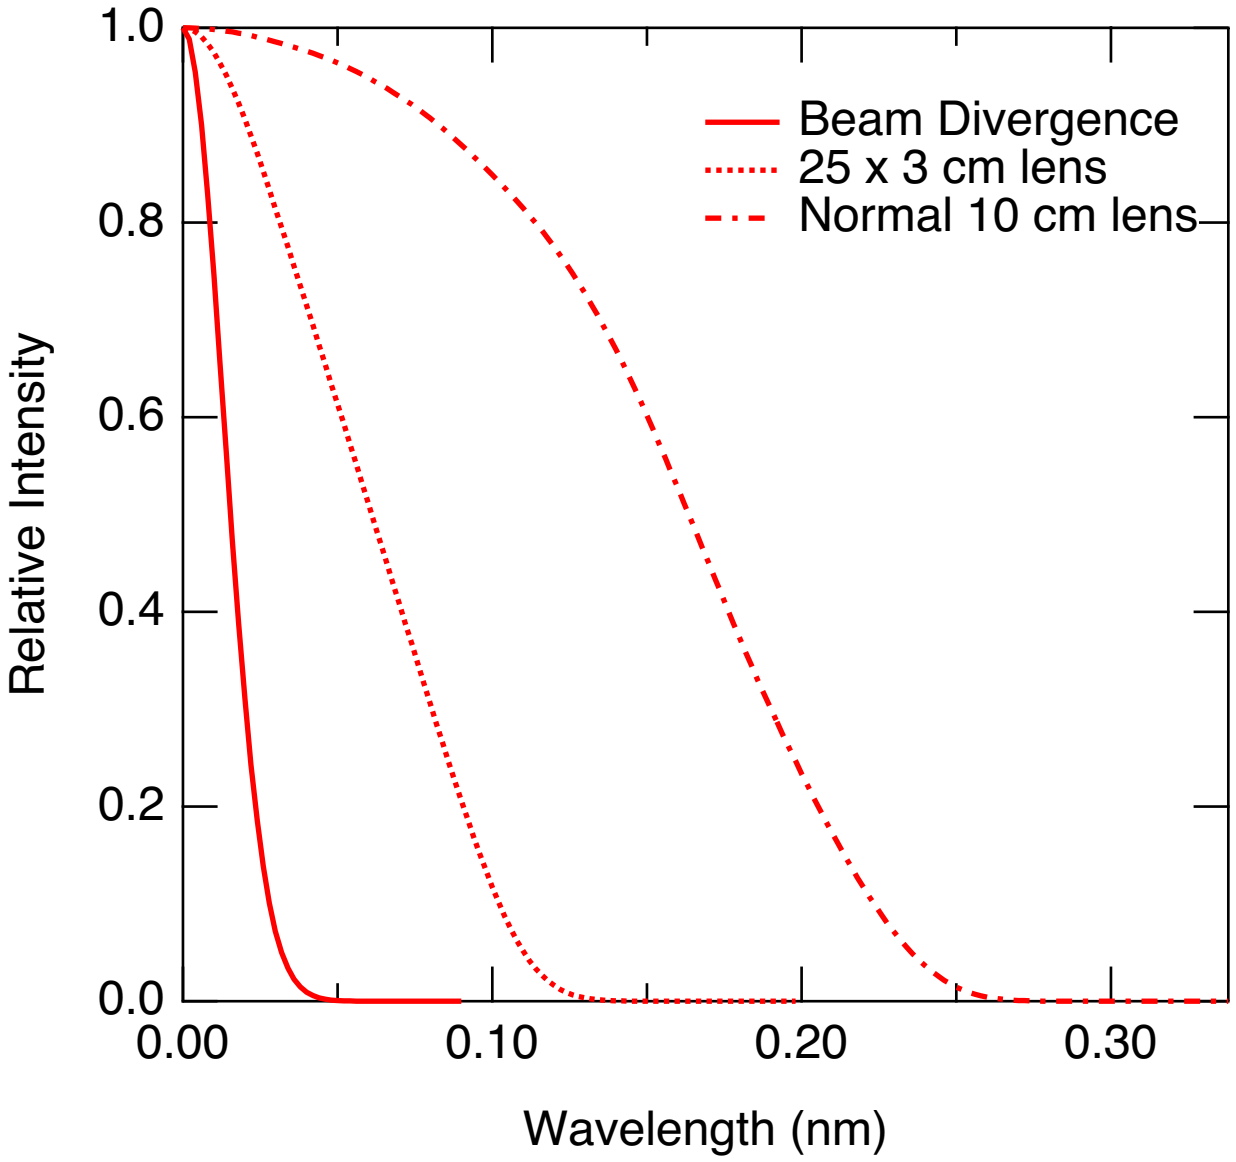

- Reduction of geometric broadening is one key element to the successful implemention of MSE-CIF.

Lens Aperture to Reduce Geometric Broadening

Nova Photonics, Inc.

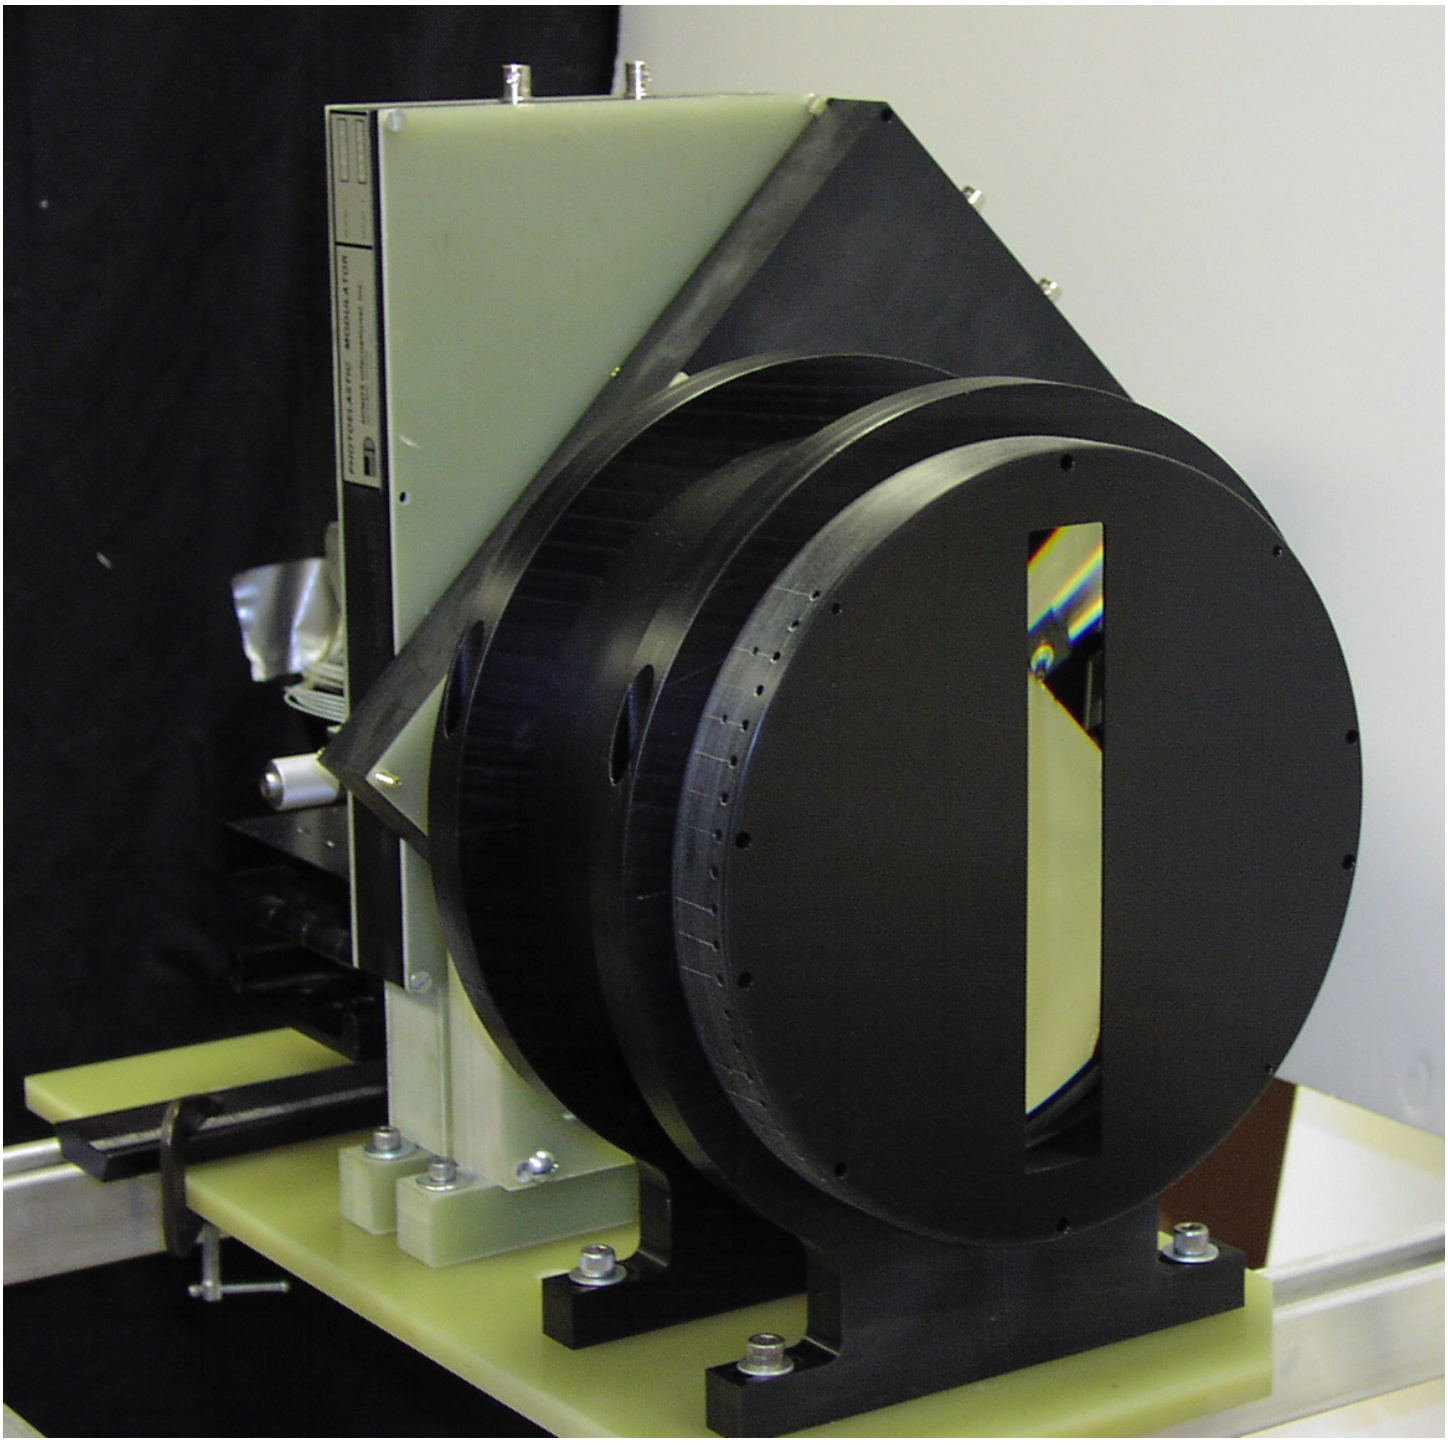

High Resolution Lyot Spectral Filter

Nova Photonics, Inc.

- To obtain a good signal-to-noise ratio a spectral filter with both high throughput and high resolution is required.
- This can be obtained using a wide angle Lyot filter.
- This uses a birefringent crystal with its optic axis oriented at 45° with respect to a pair of polarizers.
- The phase retardation is; $\Gamma = (2\pi/\lambda)\Delta nd$.
- The transmitted intensity; $T = cos^2\Gamma/2$.
- A tunable multiple stage filter has been developed for MSE-CIF.

Lyot Filter

Nova Photonics, Inc.

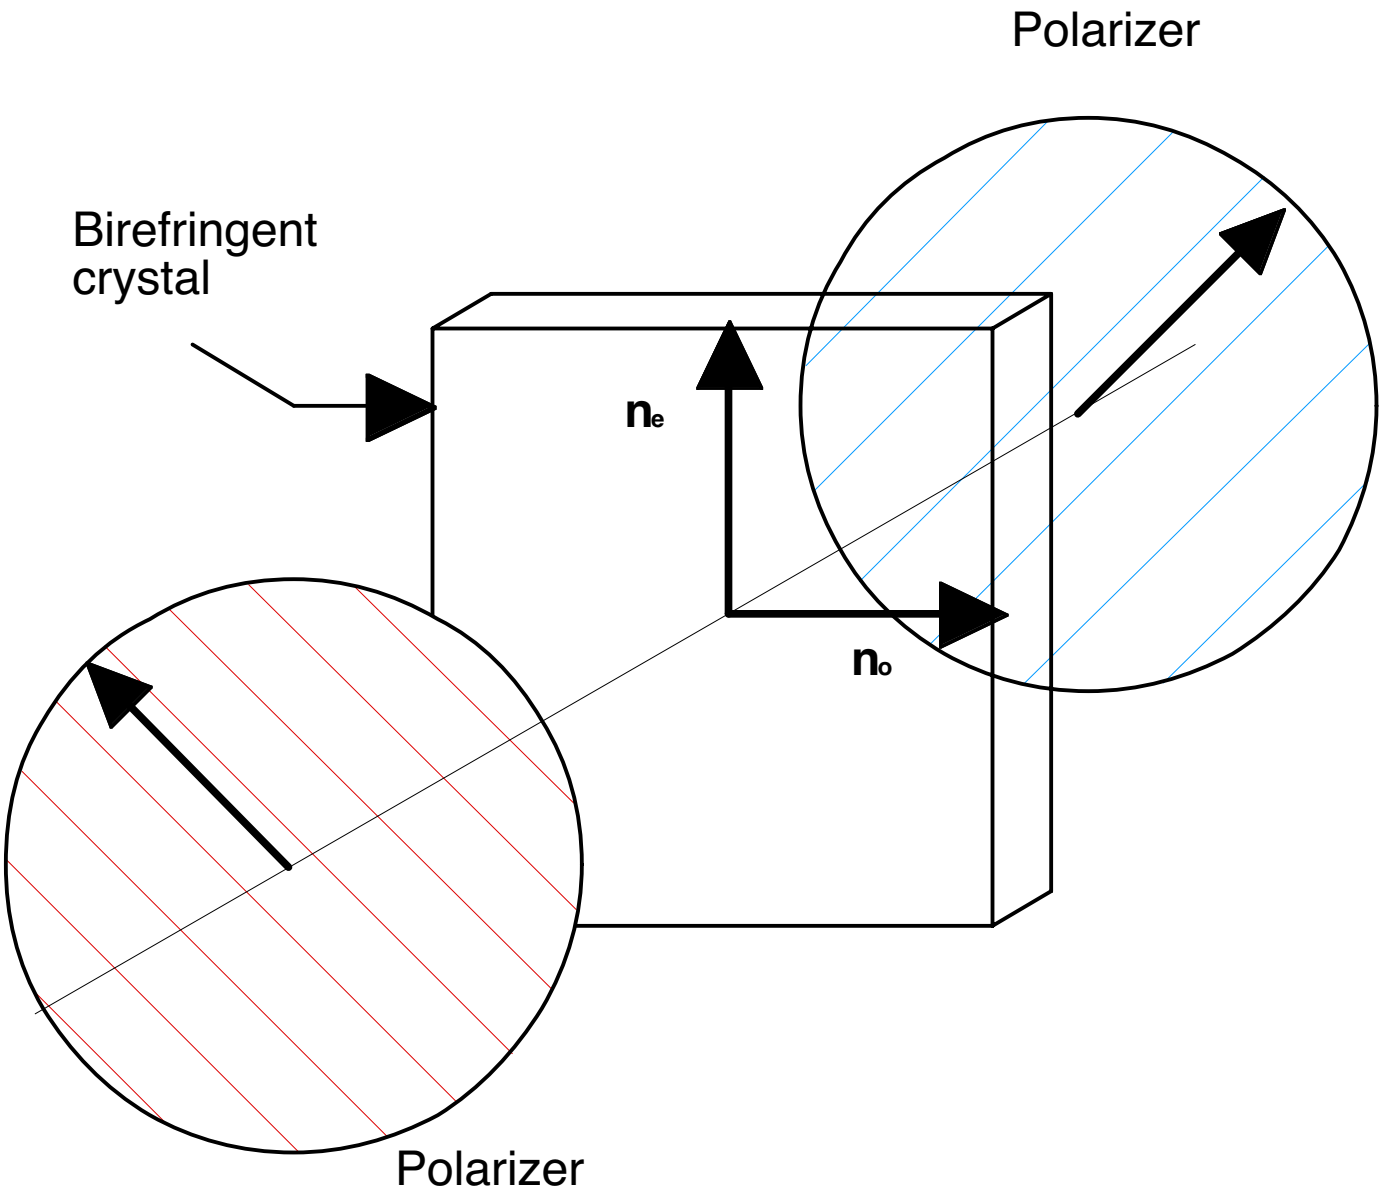

Development of a High Resolution Spectral Filter for MSE-CIF

Nova Photonics. Inc.

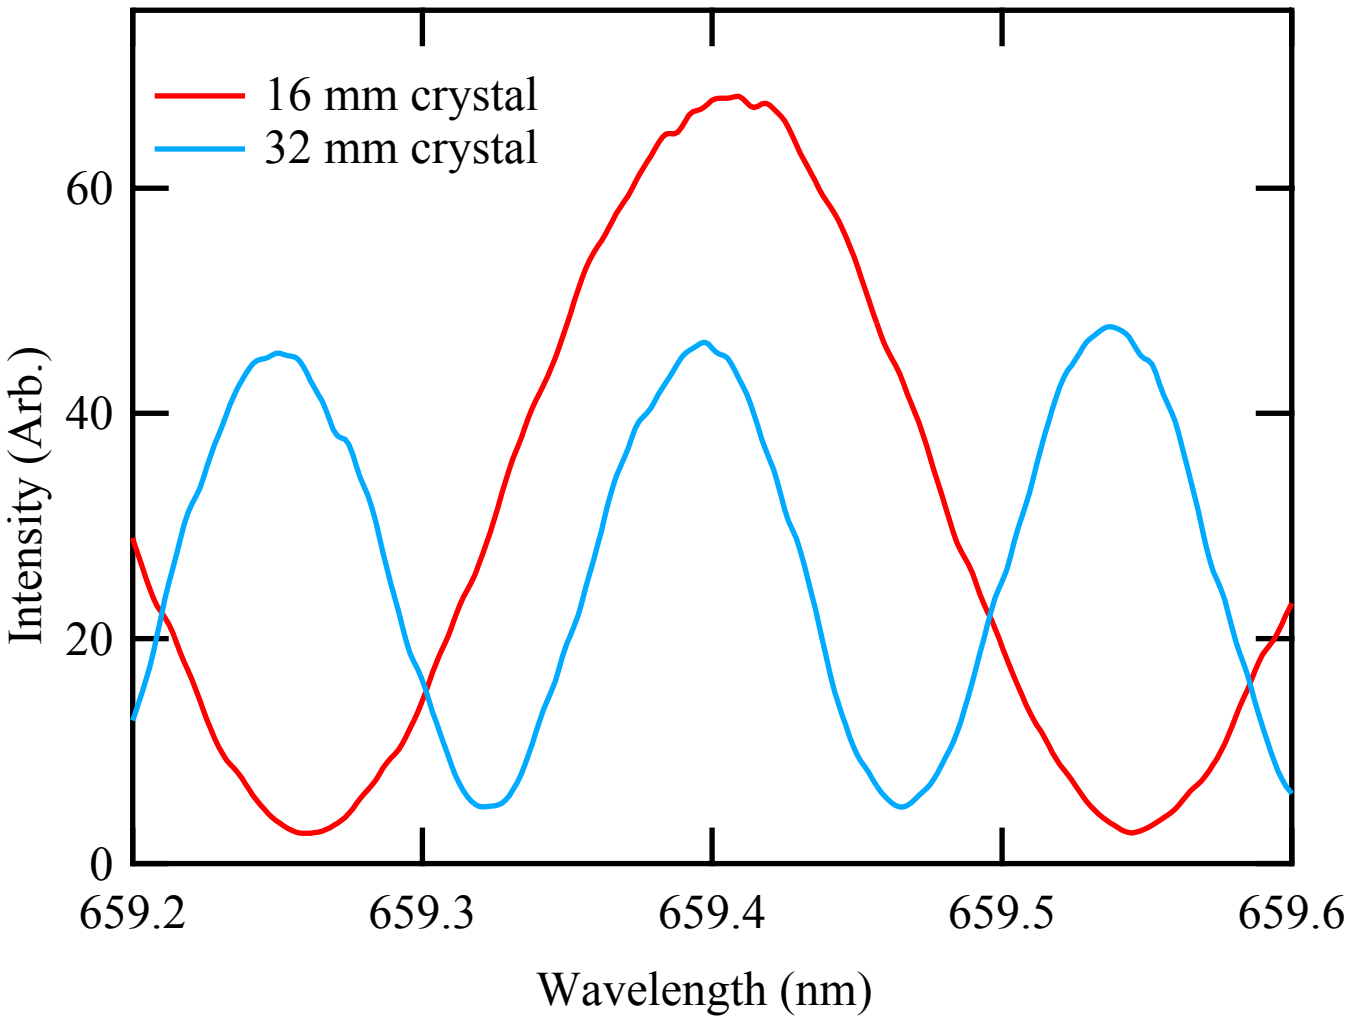

- **Lithium Niobate crystals used for filter.**
  - **Birefringence homogeneity meets requirements.**
  - **Temperature controlled to $\pm.01^\circ$ C.**
  - **Wavelength tuned electro-optically.**

Four Stage Filter for MSE-CIF

Nova Photonics, Inc.

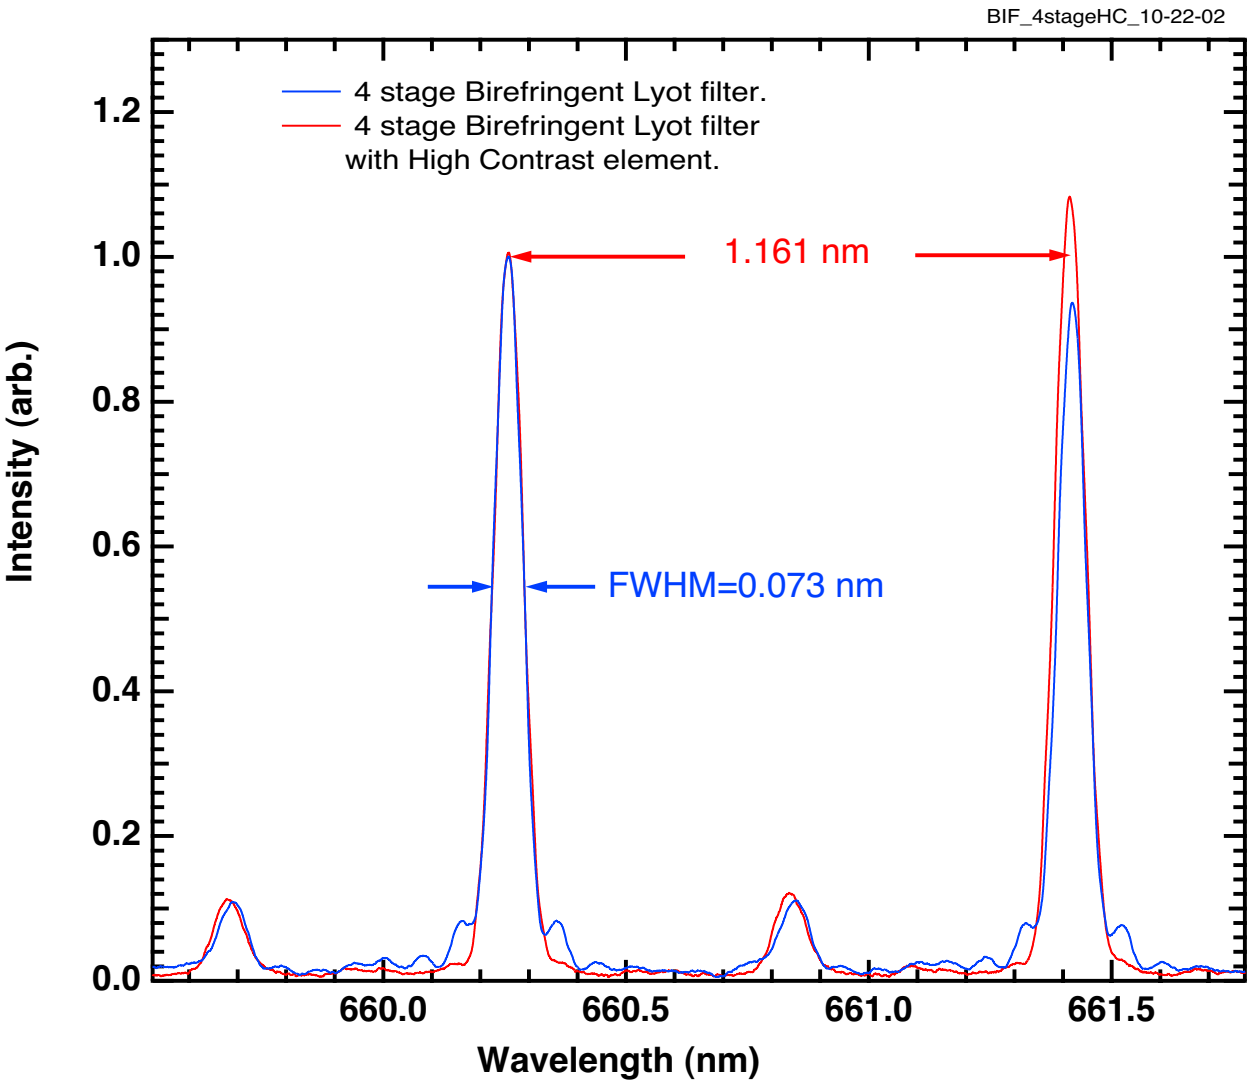

- Four stage prototype completed.
- Wavelength tuned electro-optically.

Prototype Filter and Optics Enclosure

Nova Photonics, Inc.

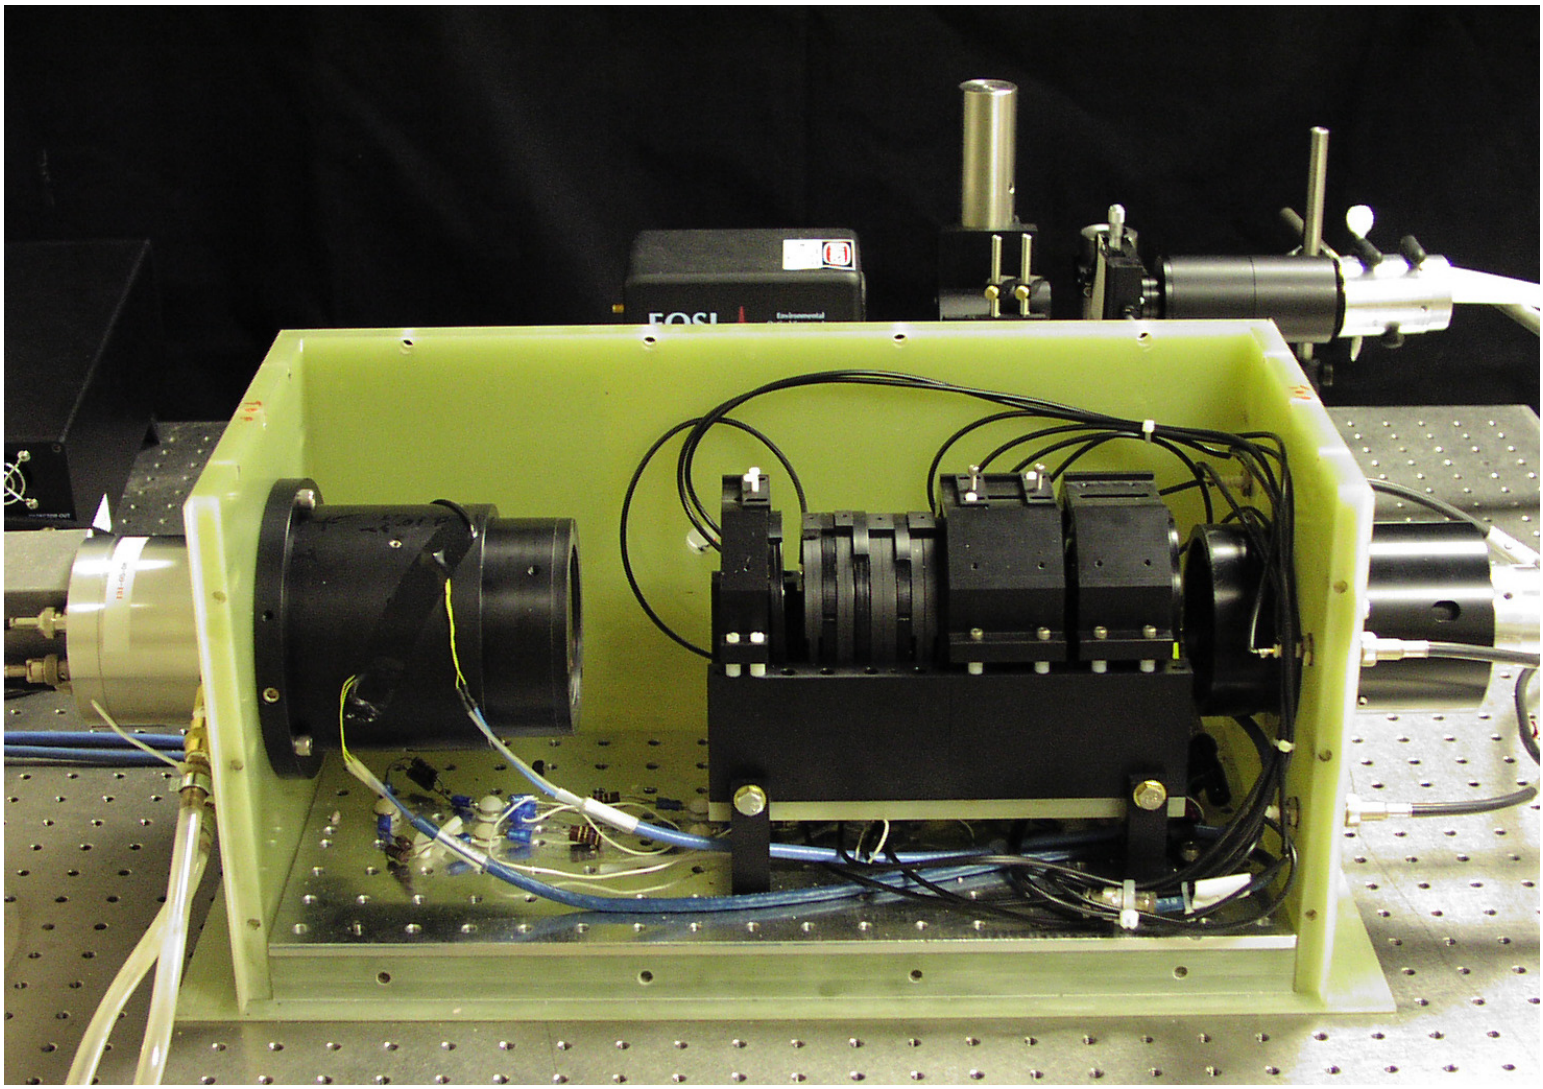

- Enclosure contains collimating and focusing optics, APD detector, and temperature control.
- Tuning is done electro-optically.

Output Fiber Optic Holder

Nova Photonics, Inc.

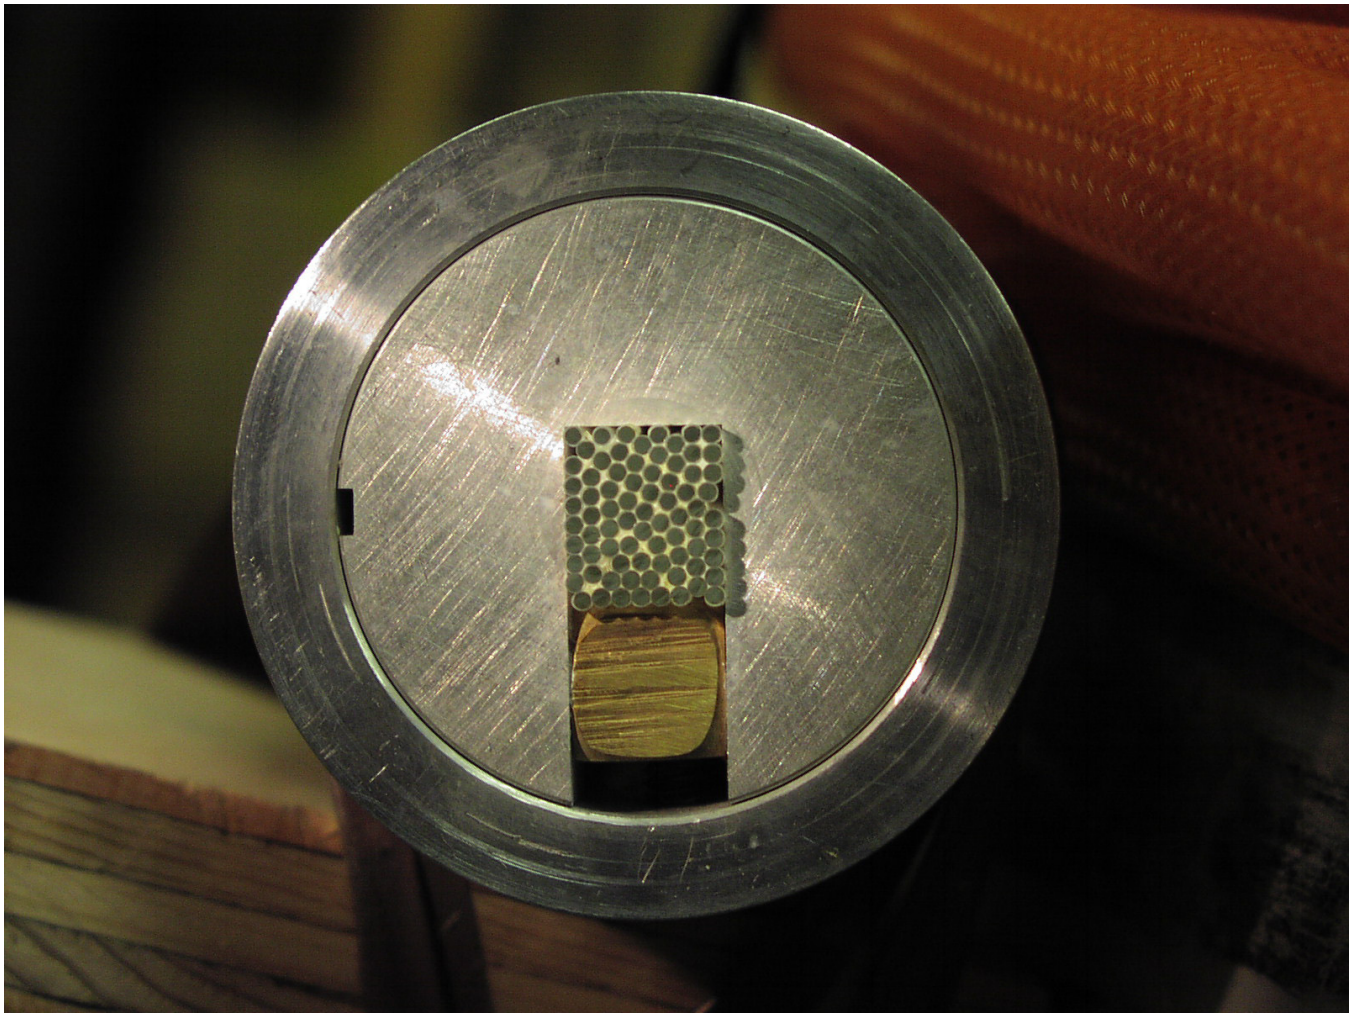

MSE & CHERS Fiber Optic Holder

Nova Photonics, Inc.

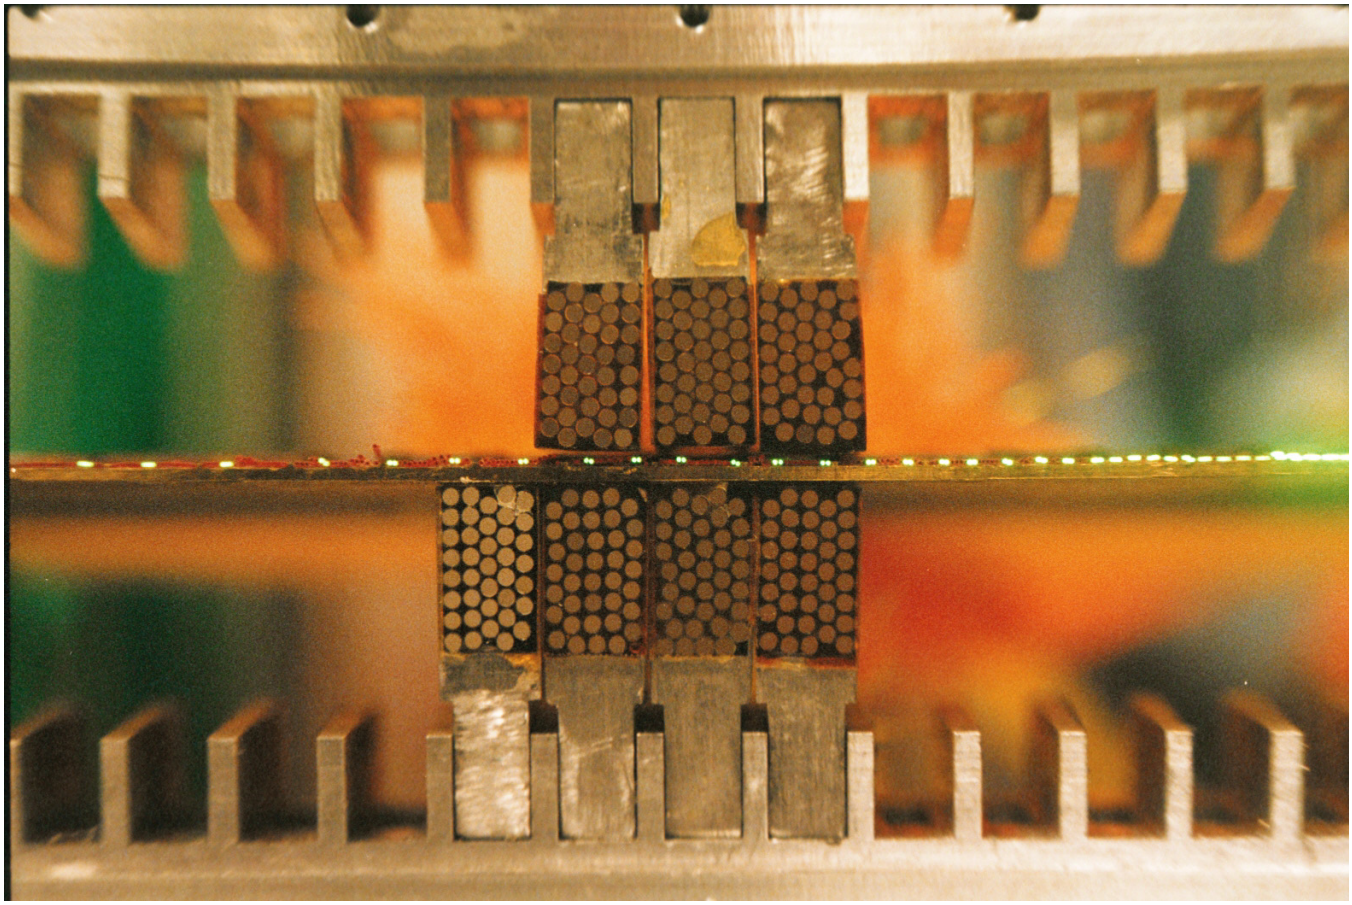

- View of fiber holder with a few MSE fiber ferrules installed.
- CHERS fibers are the small fibers in the midplane. Ratio of light collection is about 1000:1.

MSE-CIF Layout on NSTX

Nova Photonics, Inc.

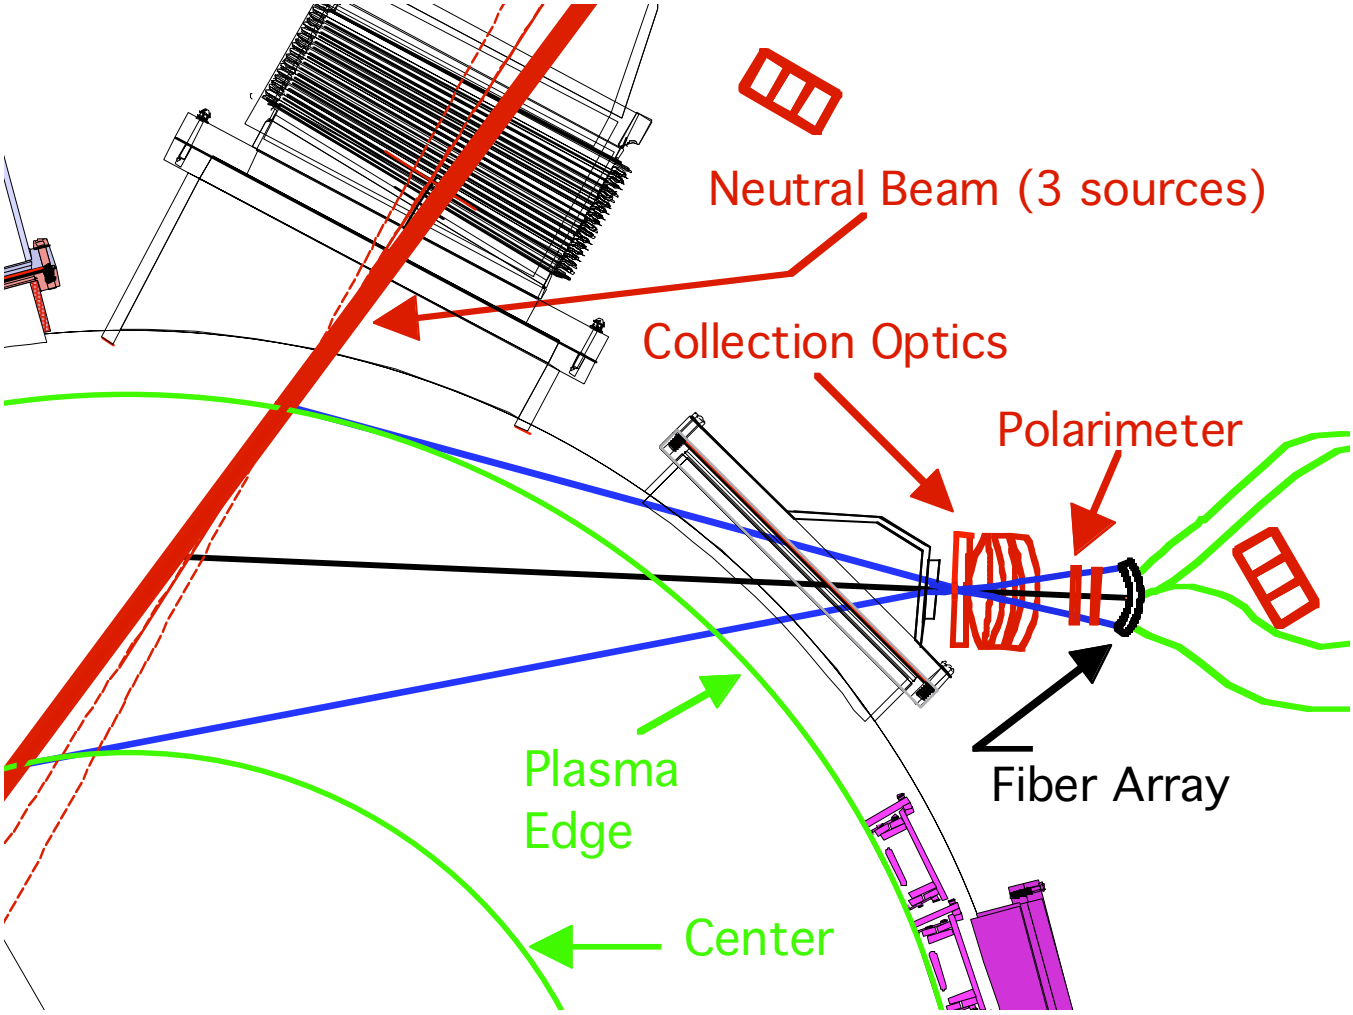

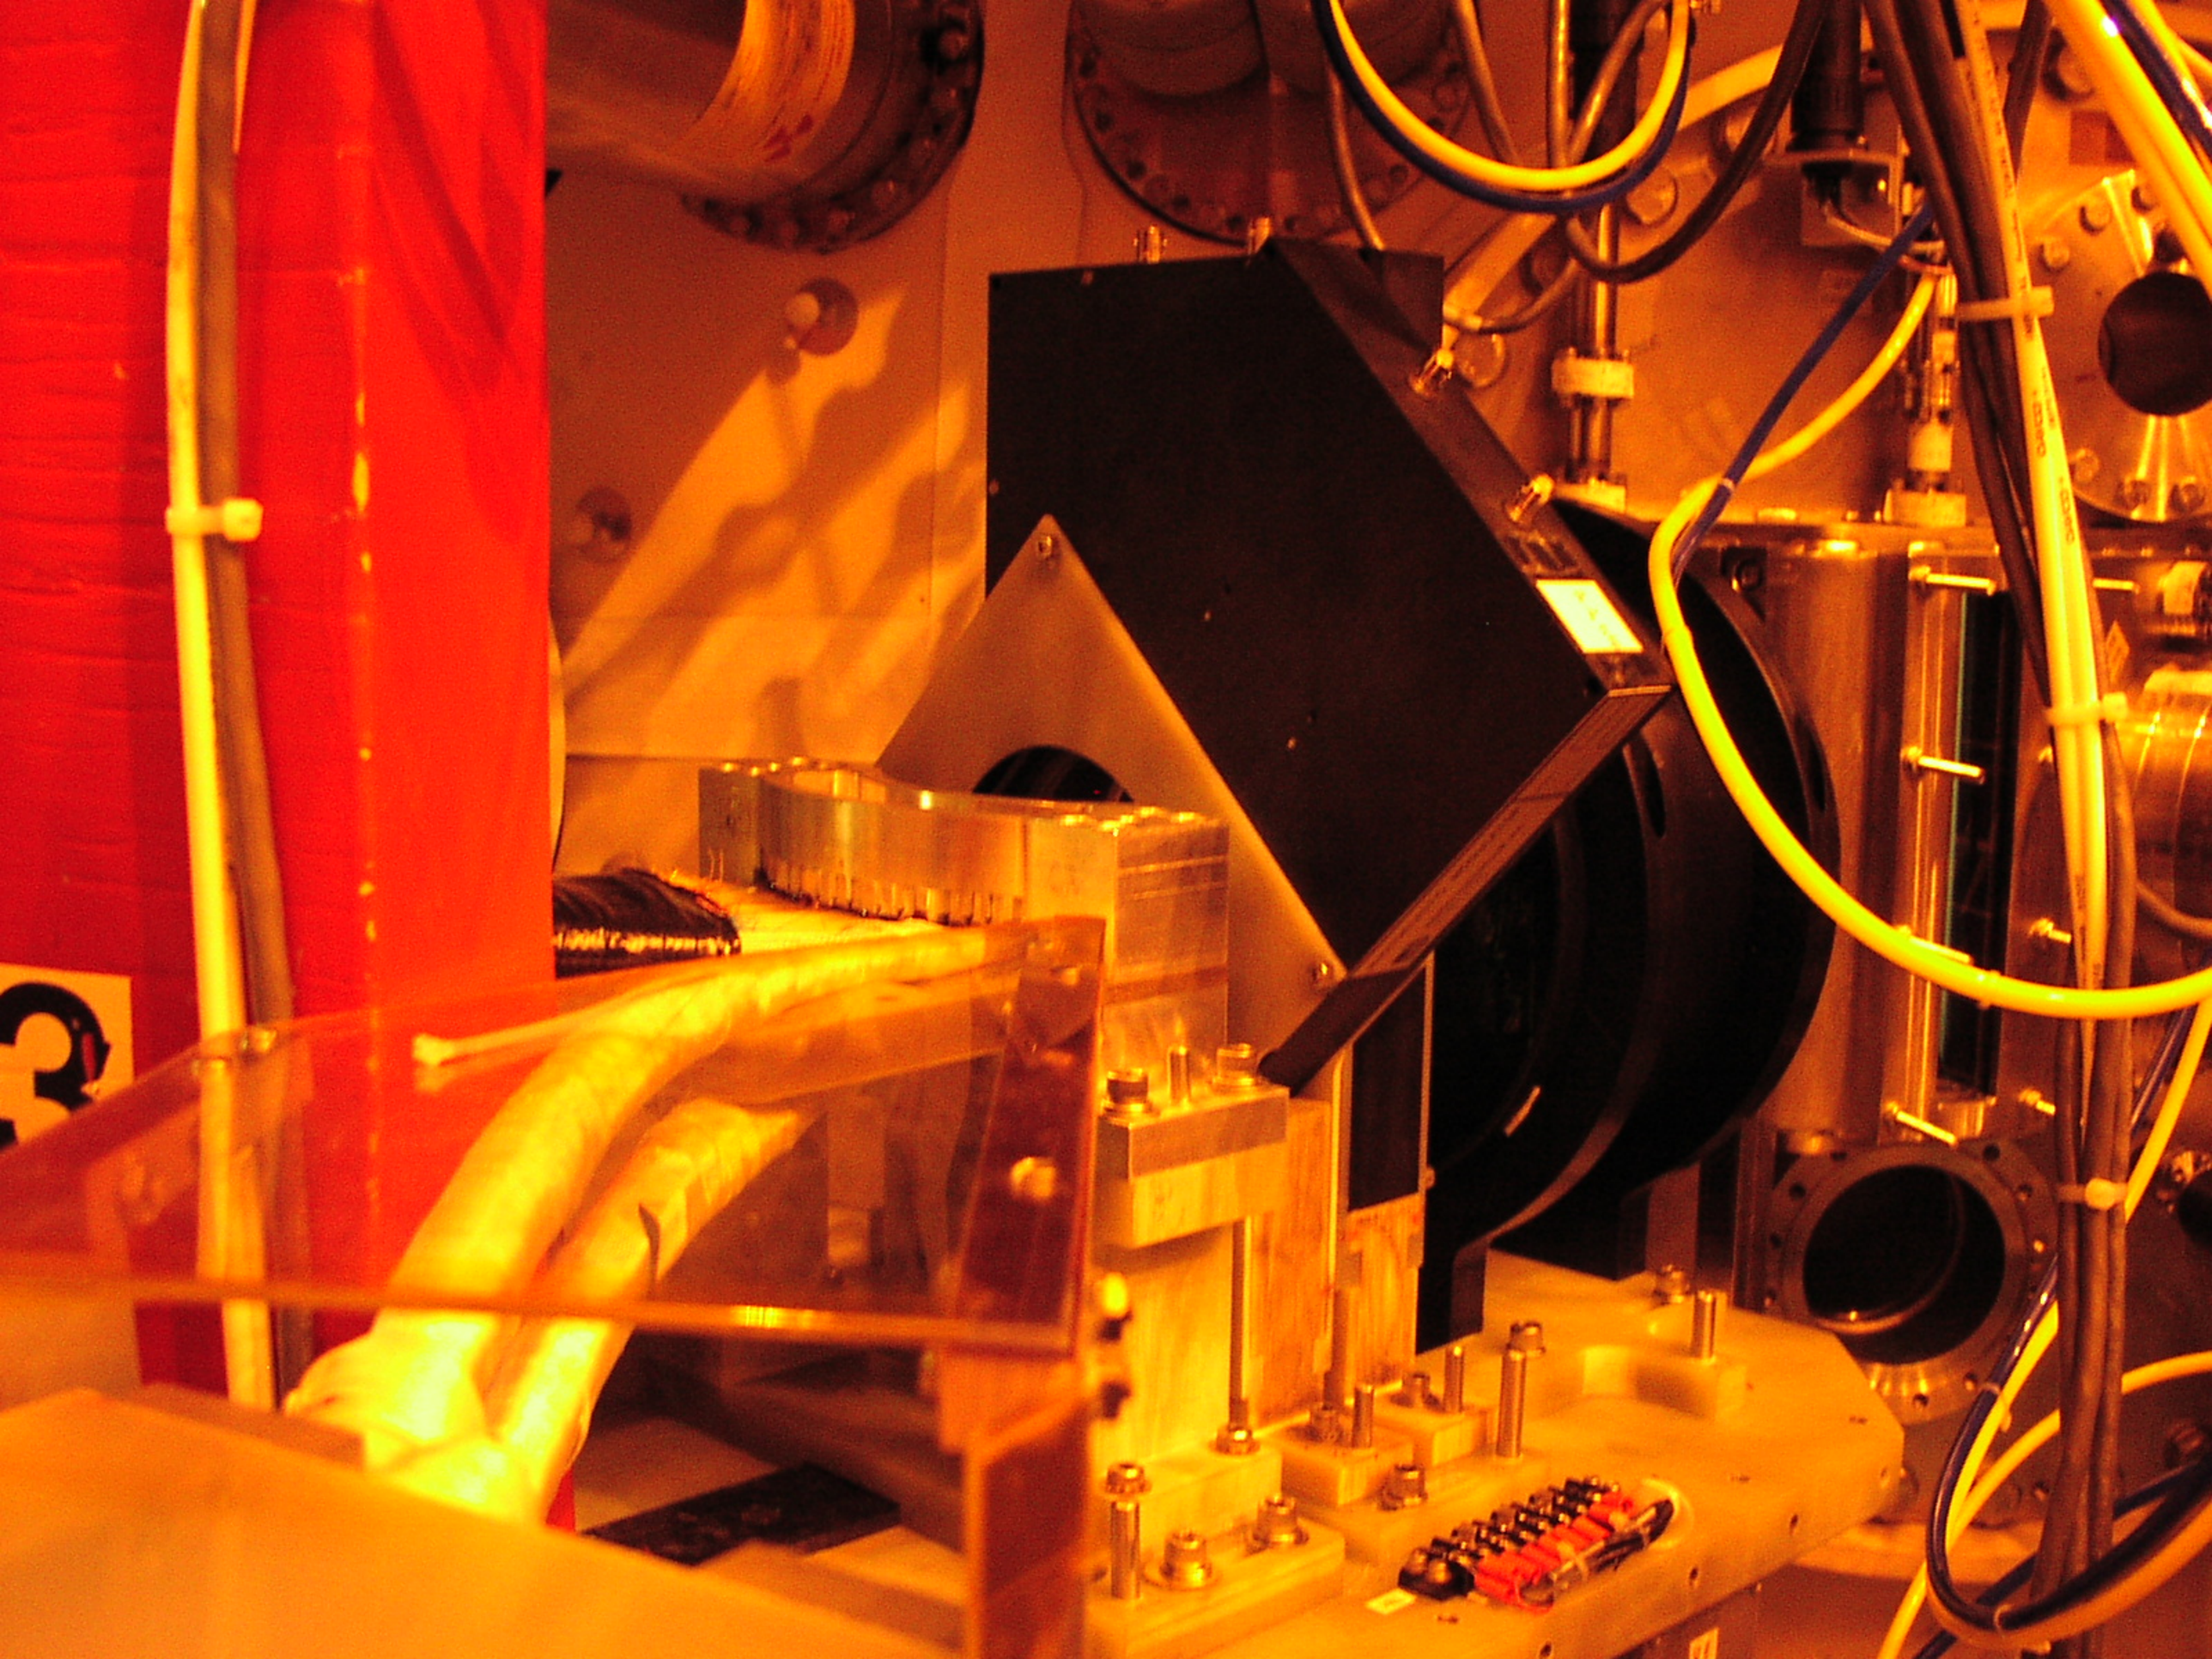

Status and Summary

Nova Photonics, Inc.

- **Installation of collection optics and fiber optics is complete.**
- **Development of a *tunable*, *high resolution*, *high throughput* spectral filter is complete.**
- **First light $\approx$ in early 2003.**
- **Goal: 10 channels operating during next NSTX run and 19 channels in 2004.**