

Reduction in pedestal transport with lithium coated PFCs in NSTX

J.M. Canik




R. Maingi (ORNL), R.E. Bell, W.A. Guttenfelder, H.W. Kugel, B.P. LeBlanc, Y. Ren (PPPL), S. Kubota (UCLA), T.H Osborne (GA), V.A. Soukhanovskii (LLNL)

and the NSTX Research Team

52nd APS-DPP
Chicago, IL
Nov 9, 2010

College W&M
Colorado Sch Mines
Columbia U
CompX
General Atomics
INEL
Johns Hopkins U
LANL
LLNL
Lodestar
MIT
Nova Photonics
New York U
Old Dominion U
ORNL
PPPL
PSI
Princeton U
Purdue U
SNL
Think Tank, Inc.
UC Davis
UC Irvine
UCLA
UCSD
U Colorado
U Illinois
U Maryland
U Rochester
U Washington
U Wisconsin

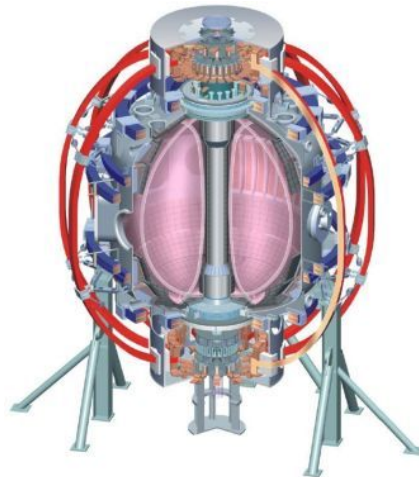


Culham Sci Ctr
U St. Andrews
York U
Chubu U
Fukui U
Hiroshima U
Hyogo U
Kyoto U
Kyushu U
Kyushu Tokai U
NIFS
Niigata U
U Tokyo
JAEA
Hebrew U
Ioffe Inst
RRC Kurchatov Inst
TRINITY
KBSI
KAIST
POSTECH
ASIPP
ENEA, Frascati
CEA, Cadarache
IPP, Jülich
IPP, Garching
ASCR, Czech Rep
U Quebec

Outline

- Introduction: ELM elimination and pedestal profile changes with lithium coatings
- SOLPS is used for interpretive modeling of the edge plasma
- Lithium coatings lead to widening of edge transport barrier
 - Two regions: stiff T_e near separatrix, reduced transport at top of pedestal
 - Measurements show reduced fluctuations with lithium
- Discussion of candidate edge transport mechanisms


Type I ELMs eliminated, energy confinement improved with lithium wall coatings

Predicted* by
L. Zakharov
in 2005

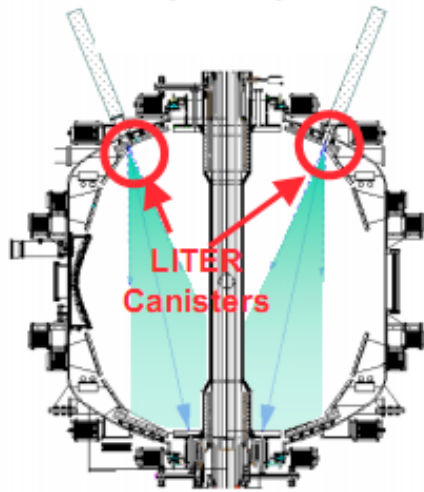

~ 700mg Li
between 129037
and 129038


* L. Zakharov, JNM 2007

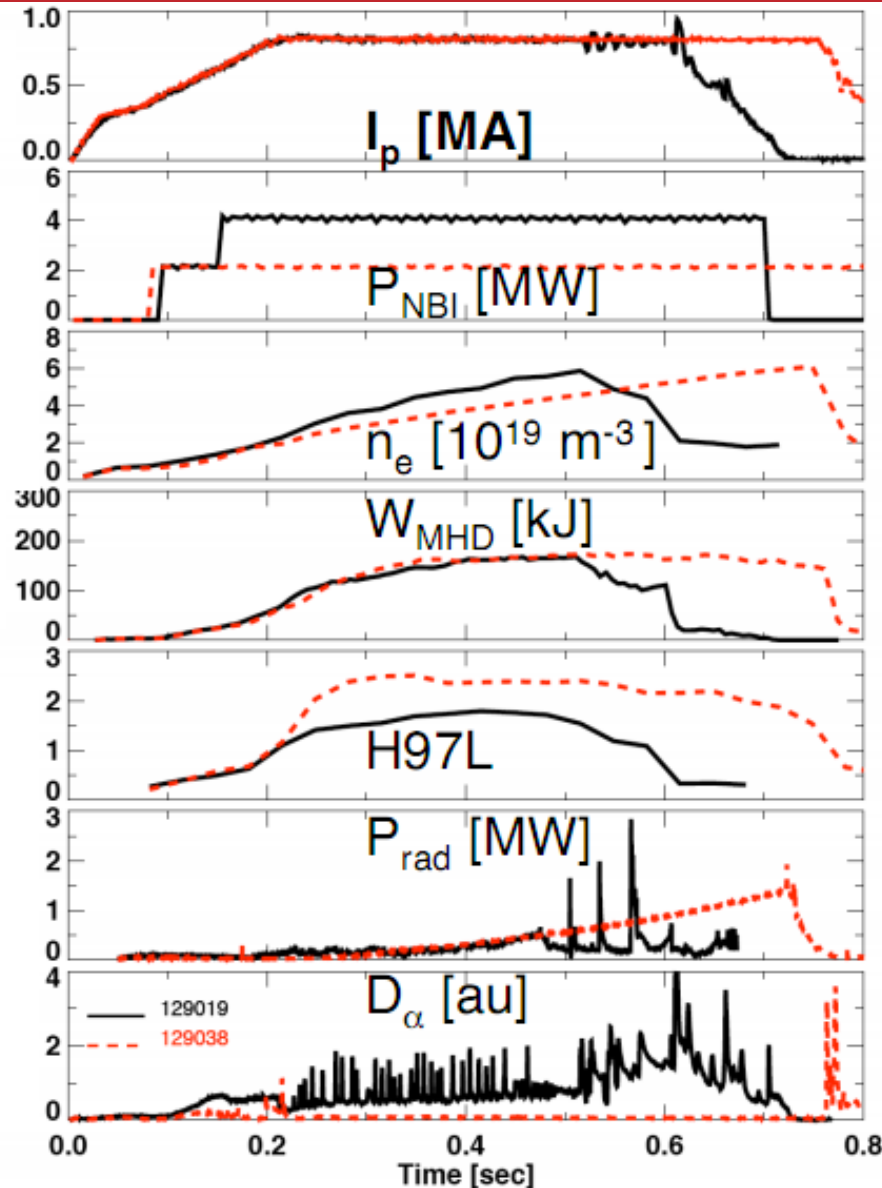



- Without-Li, **With Li**
- Lower NBI to avoid β limit
- Lower n_e
- Similar stored energy
- H-factor 40% \uparrow
- Higher P_{rad} / P_{heat}
- ELM-free, reduced divertor recycling

H. Kugel PoP 2008
R. Kaita IAEA 2008
M. Bell PPCF 2009



T_e , T_i increased and edge n_e decreased with lithium

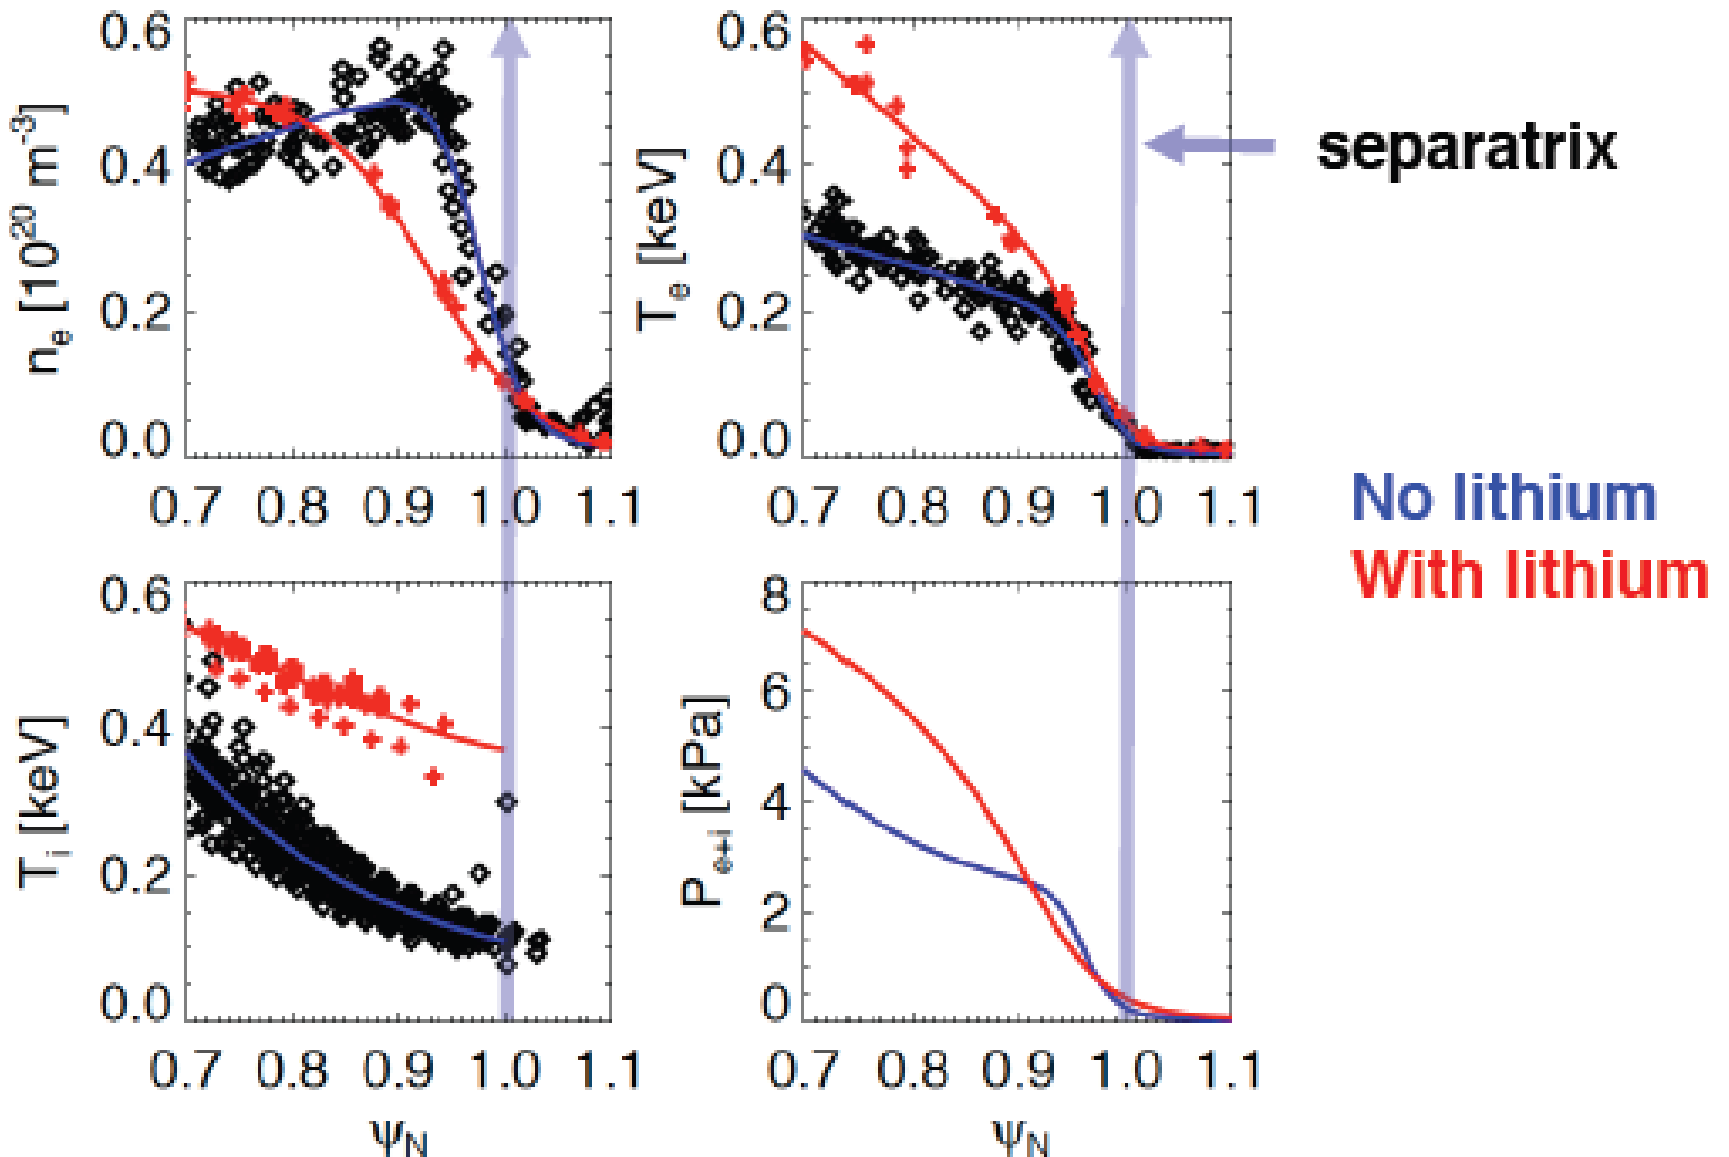


Peak pressure gradient moves inwards, p' and j reduced outside $\psi_N \sim 0.95$

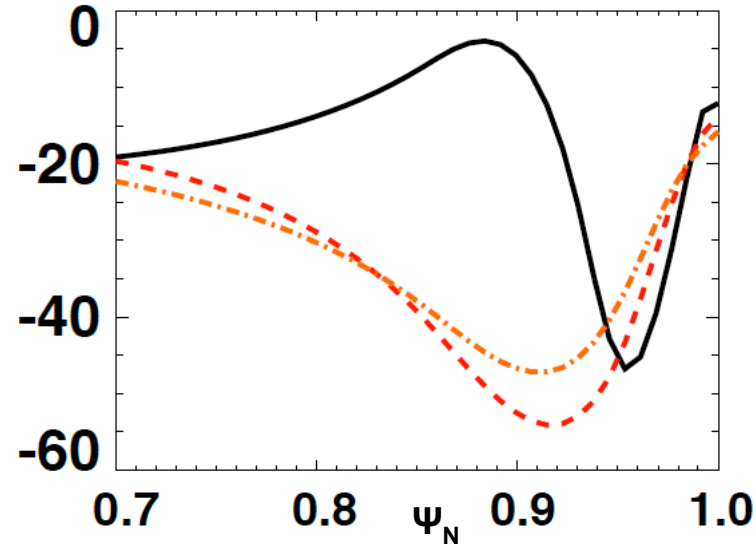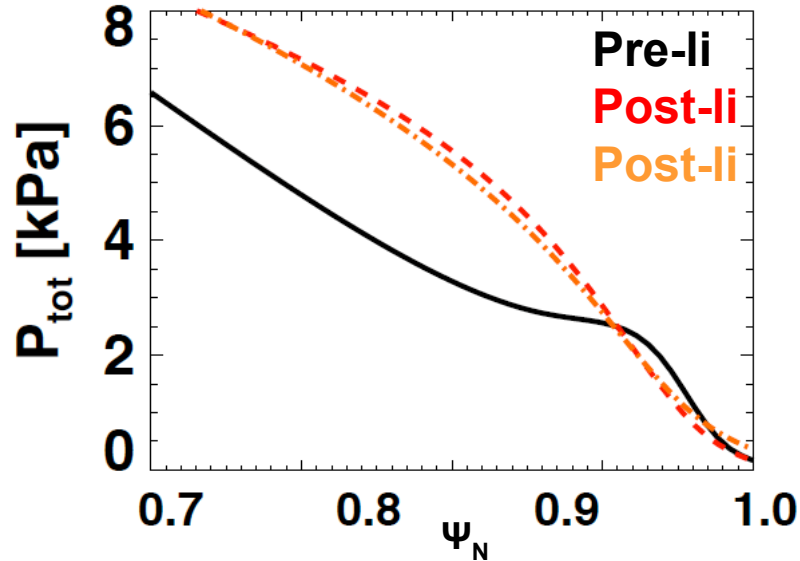

R Maingi, PRL 2009

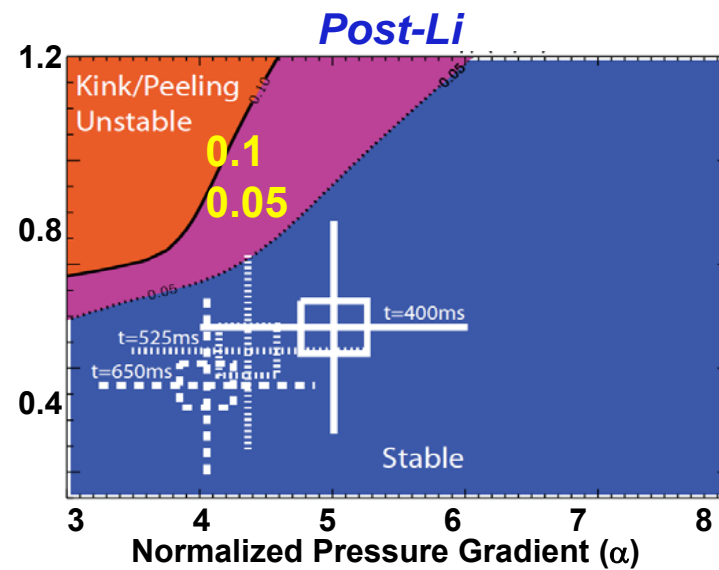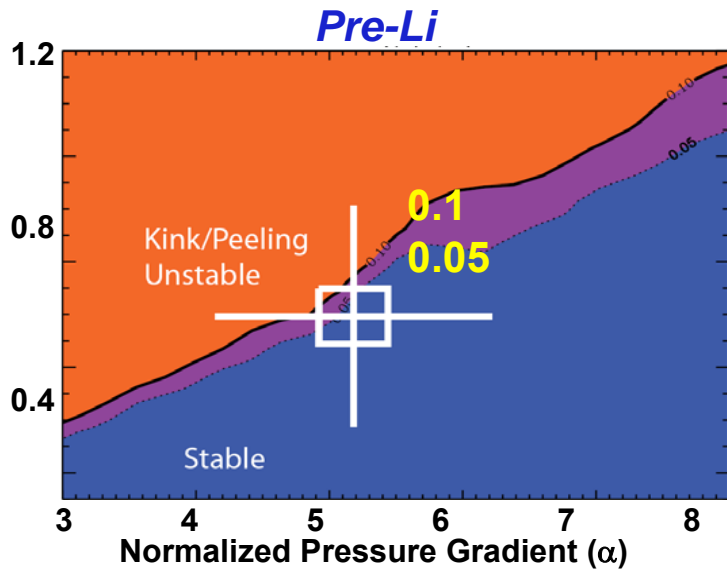

Pre- and post-lithium discharges are modeled using SOLPS


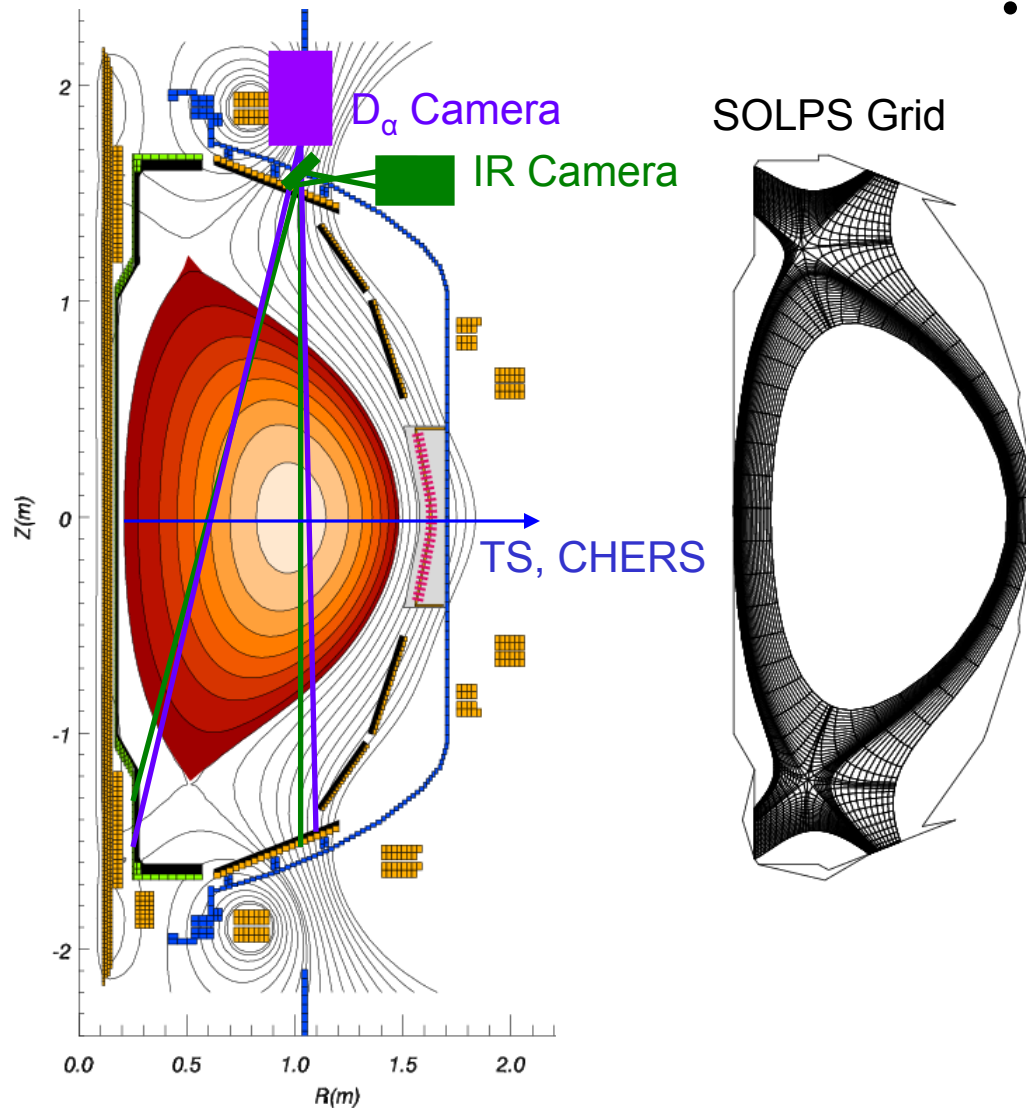


- SOLPS (B2-EIRENE: 2D fluid plasma + MC neutrals) used to model NSTX experimental data
 - ✓ Neutrals contributions
 - ✓ Recycling changes due to lithium

Parameters adjusted to fit data	Measurements used to constrain code
Radial transport coefficients D_{\perp} , χ_e , χ_i	Midplane n_e , T_e , T_i profiles
PFC Recycling coefficient	Calibrated D_{α} camera
Separatrix position/ T_e^{sep}	Peak divertor heat flux



Procedure for fitting midplane n_e , T_e , T_i profiles

- Start with initial guess for D_{\perp} , χ_e, χ_i
- Run simulation for $\sim 10\%$ of confinement time
- Take radial fluxes along 1-D slice at midplane from code
 - $\Gamma^{\text{SOLPS}}, q_e^{\text{SOLPS}}, q_i^{\text{SOLPS}}$
- Update transport coefficients using SOLPS fluxes and *experimental* profiles
 - E.g., $D^{\text{new}} = -\Gamma^{\text{SOLPS}}/\text{grad}(n_e^{\text{EXP}})$
 - Here we use fits to profiles used in stability calculations (Maingi PRL '09)
- Repeat until $n_e/T_e/T_i^{\text{SOLPS}} \sim n_e/T_e/T_i^{\text{EXP}}$

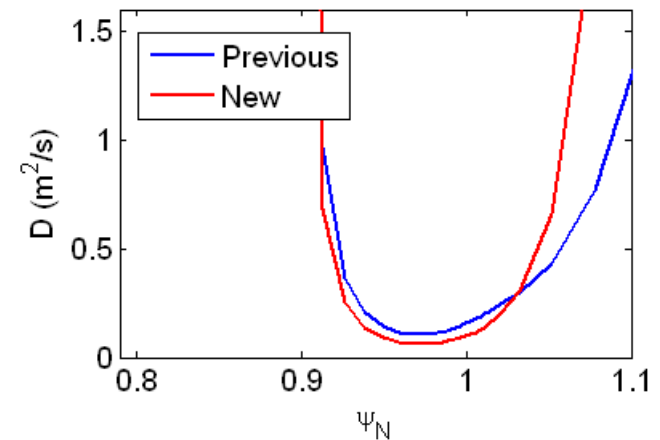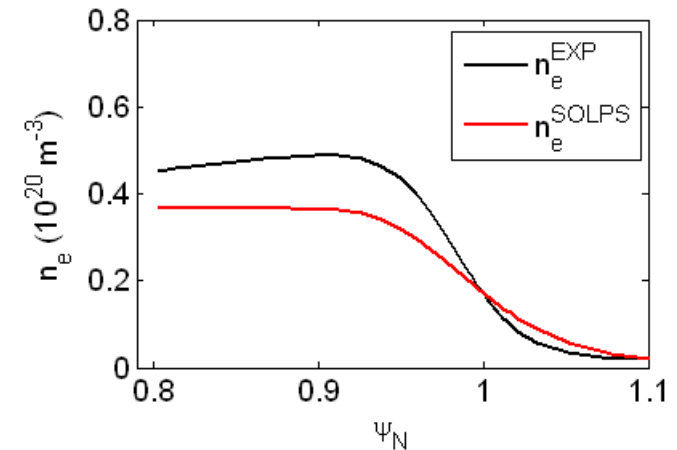


Peak D_α brightness is matched to experiment to constrain PFC recycling coefficient: lithium reduces R from ~ 0.98 to ~ 0.9

- For each discharge modeled, PFC recycling coefficient R is scanned
 - Fits to midplane data are redone at each R to maintain match to experiment
- D_α emissivity from code is integrated along LOS of camera, compared to measured values
 - Best fit indicates reduction of recycling from $R \sim 0.98$ to $R \sim 0.9$ when lithium coatings are applied

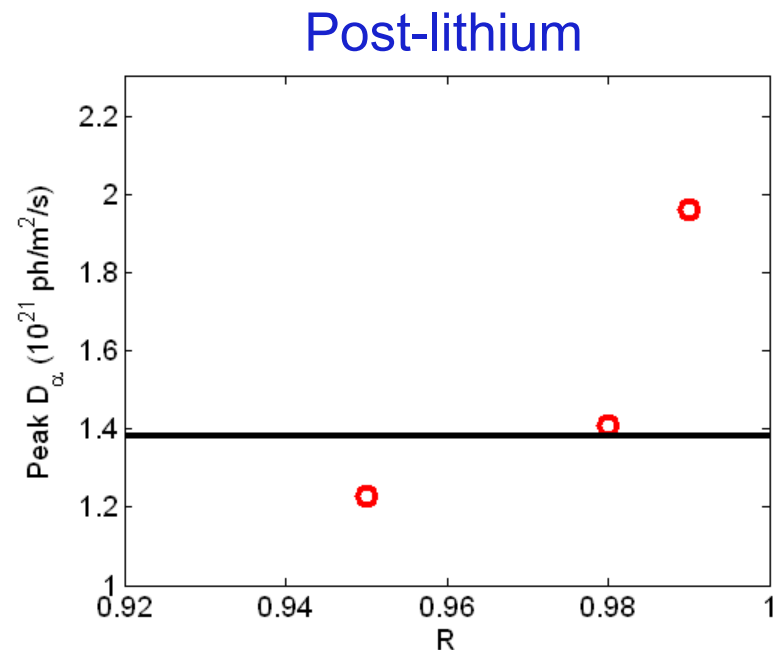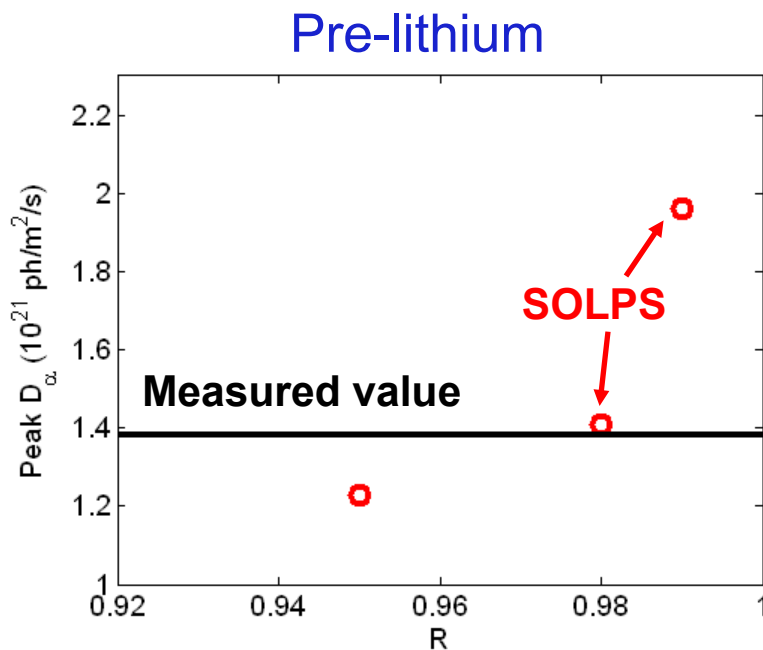

Midplane and divertor profiles from modeling compare well to experiment for the pre-lithium case

- $P=3.7$ MW
- $R=0.98$
- Good match to midplane profiles
- Heat flux and D_α profiles shifted radially to align peaks
- Heat flux and D_α radial decay sharper than experiment

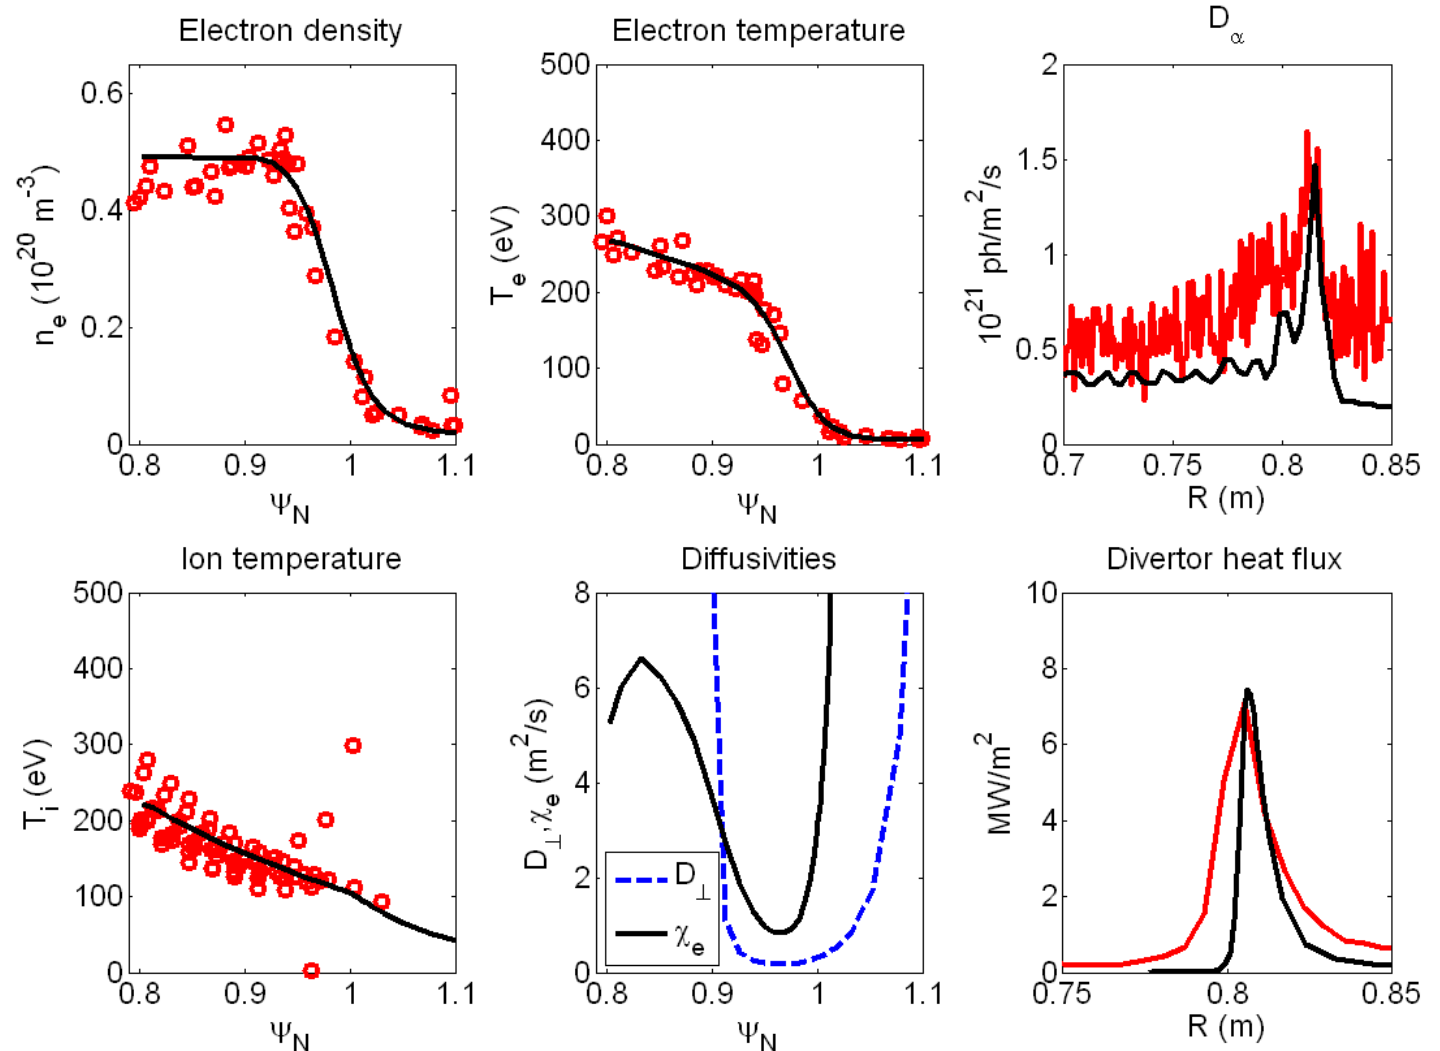


Combining reduced recycling and transport changes gives match to measurements with lithium

- $P=1.9$ MW
- $R=0.90$
- Transport coefficients adjusted to recover fit to upstream data





- Good match to both peak and profile for heat flux and D_α (except PFR)

*Uncertainty exists in IR measurements, due to emissivity change with lithium films

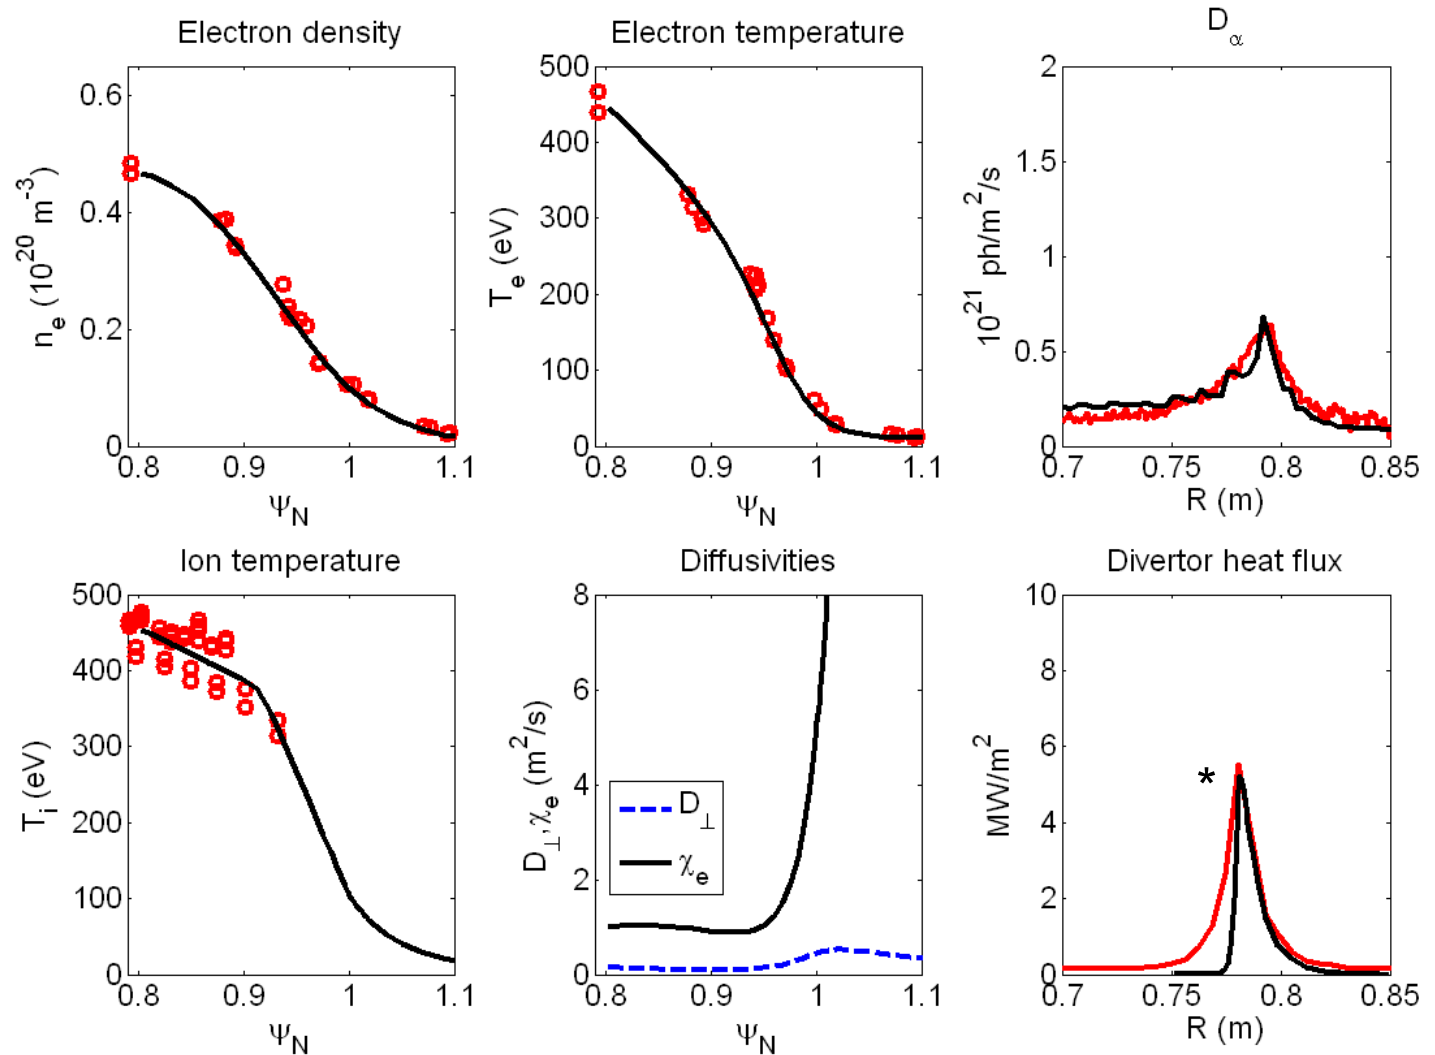


Transport barrier widens with lithium coatings, broadening pedestal

- Pre-lithium case shows typical H-mode structure
 - Well define “end” to the pedestal at $\psi_N \sim 0.95$
 - Barrier region in D_{\perp}, χ_e just inside separatrix
- Pedestal is much wider with lithium
 - Pedestal top not clear from profiles
 - D_{\perp}, χ_e similar outside of $\psi_N \sim 0.95$
 - Low D_{\perp}, χ_e persist to inner boundary of simulation ($\psi_N \sim 0.8$)
- Changes to profiles with lithium are due to reduced fluxes combined with wide transport barrier

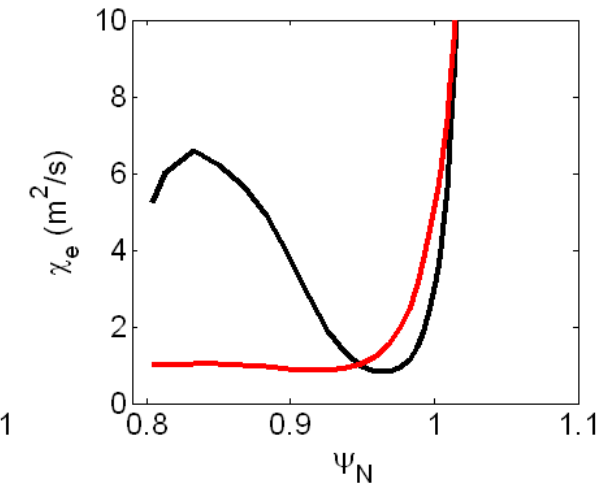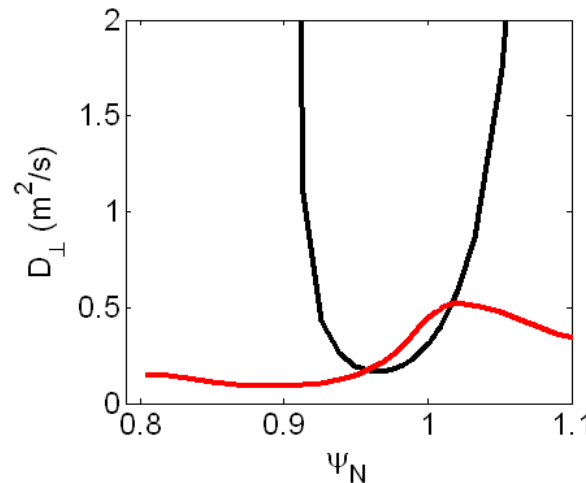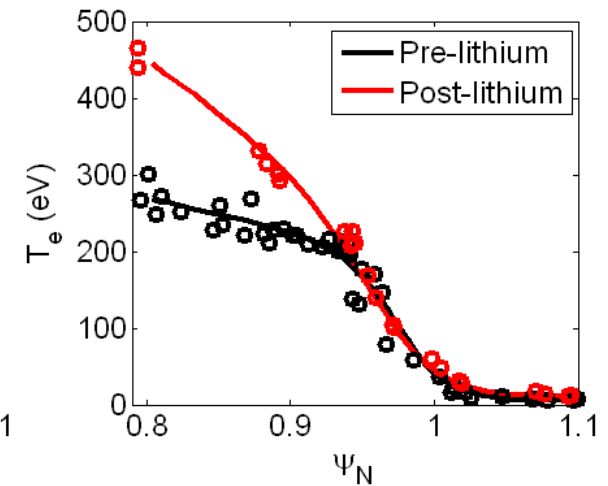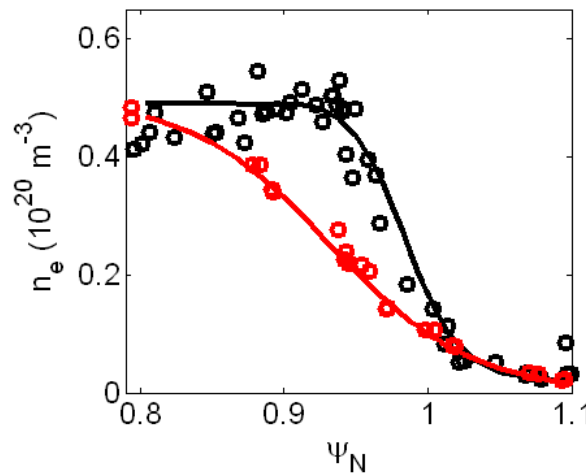





Transport barrier widens with lithium coatings, broadening pedestal

- Pre-lithium case shows typical H-mode structure
 - Well define “end” to the pedestal at $\psi_N \sim 0.95$
 - Barrier region in D_{\perp}, χ_e just inside separatrix
- Pedestal is much wider with lithium
 - Pedestal top not clear from profiles
 - D_{\perp}, χ_e similar outside of $\psi_N \sim 0.95$
 - Low D_{\perp}, χ_e persist to inner boundary of simulation ($\psi_N \sim 0.8$)
- Changes to profiles with lithium are due to reduced fluxes combined with wide transport barrier

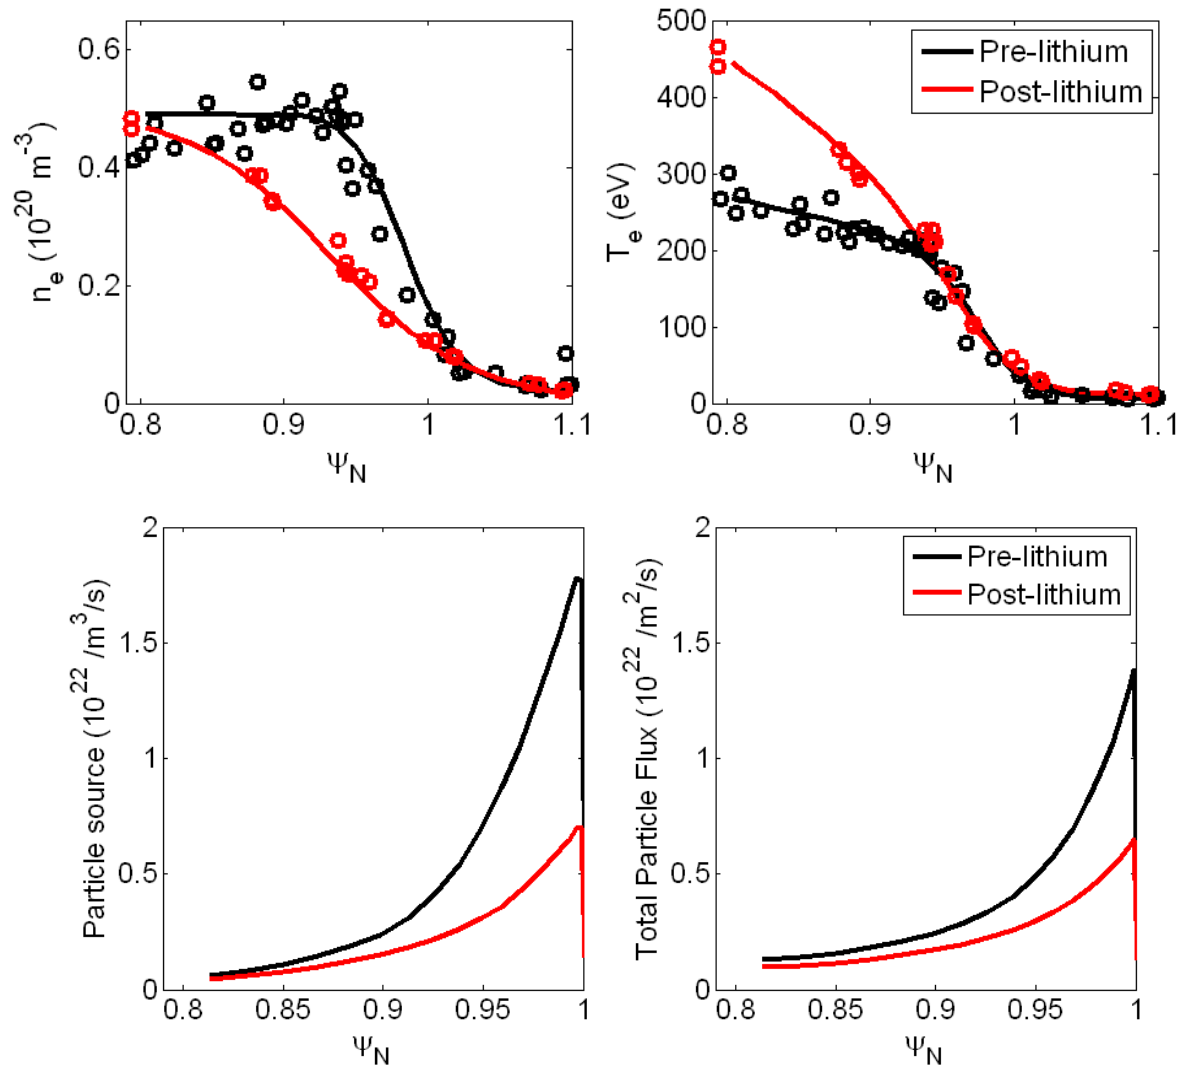



Transport barrier widens with lithium coatings, broadening pedestal

- Two regions considered
 - Top of pedestal
 - Large transport reduction
 - Bottom of pedestal
 - Transport similar with lithium

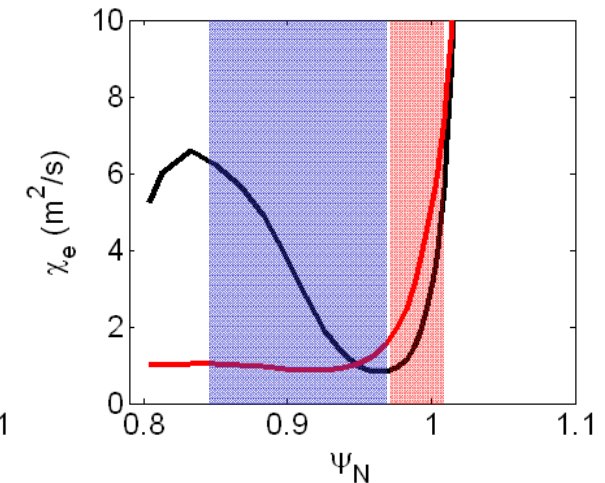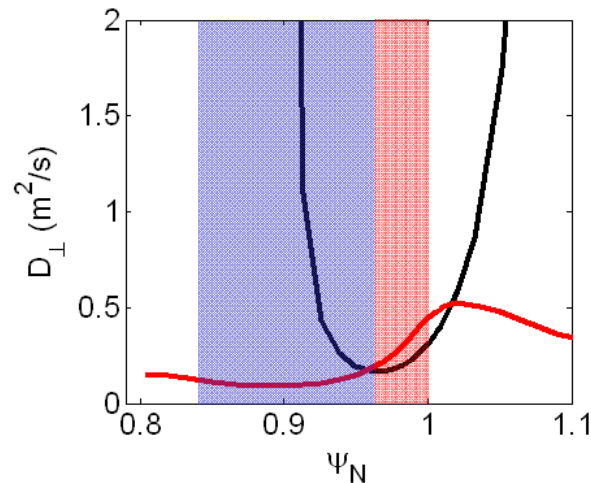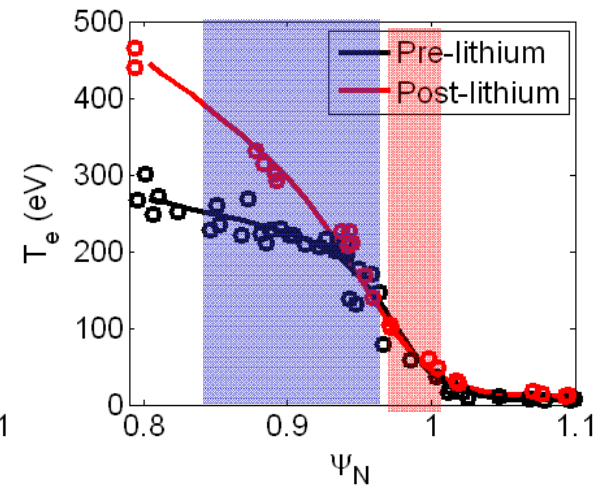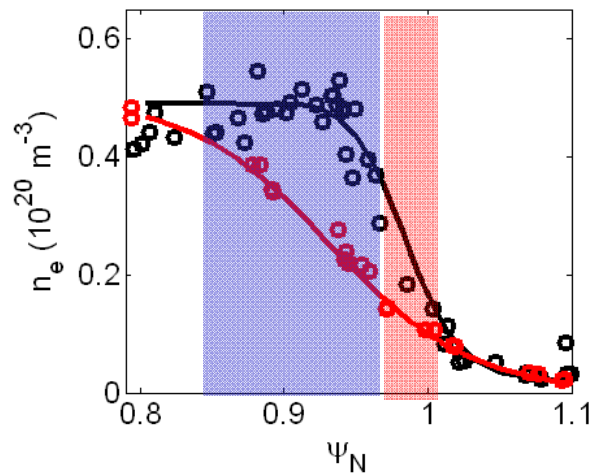





Outer region: T_e gradient nearly constant outside of $\Psi_N \sim 0.95$

- Key to ELM suppression: reduction of current for $\Psi_N > .95$
 - Density is reduced with lithium, but T_e unchanged
 - Pressure gradient is reduced \rightarrow less bootstrap current
- Edge $T_e' \sim$ constant, critical gradient?
 - Intermediate stages shown have less lithium, same P_{NBI} as pre-lithium case

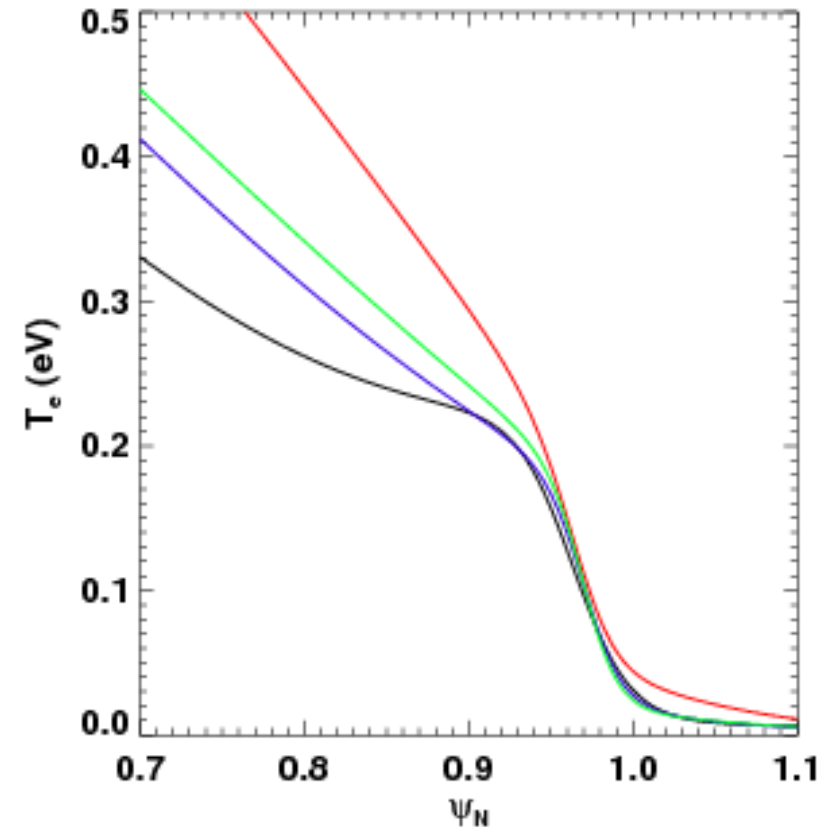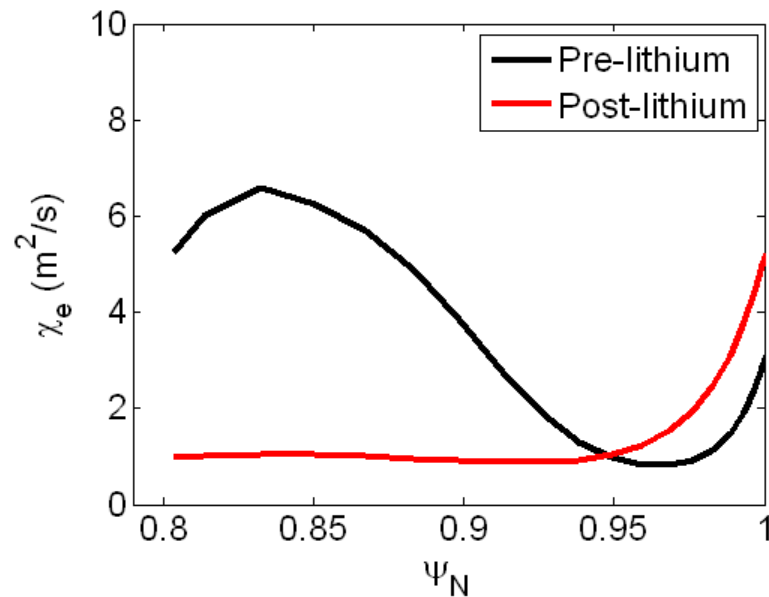



Inner region: as lithium coatings thicken, density barrier widens, pedestal-top χ_e reduced

- Several shots analyzed with increasing lithium thickness
- ELMy to reduced frequency to ELM-free
- Barrier in particle transport widens with lithium thickness
- χ_e inside $\Psi_N \sim 0.95$ gradually reduced

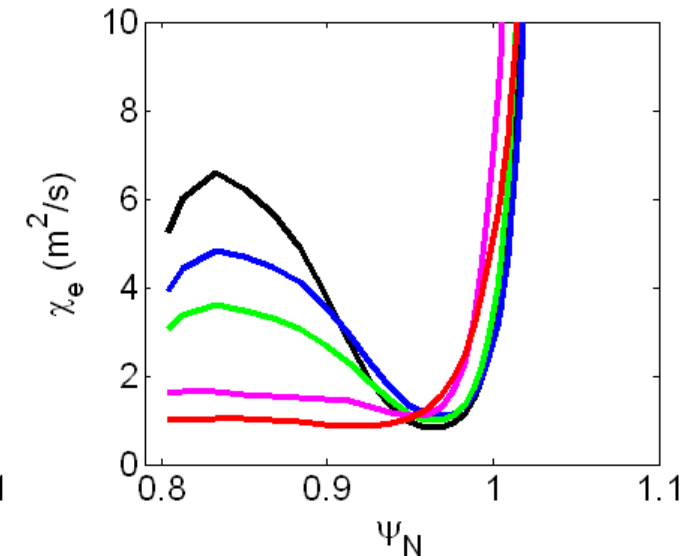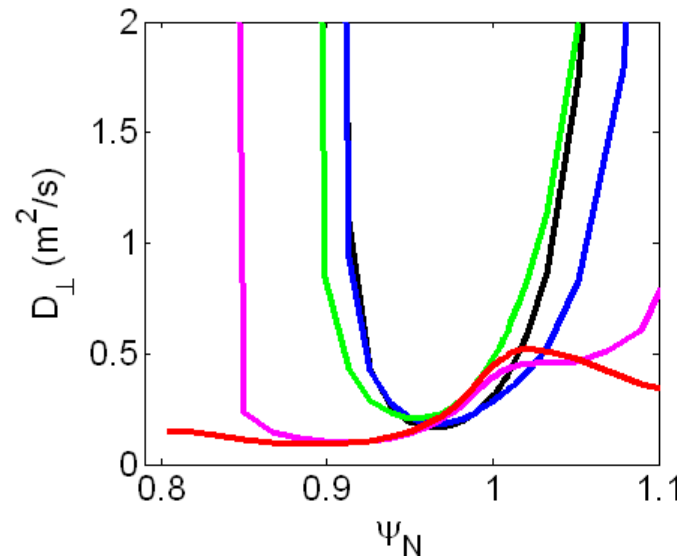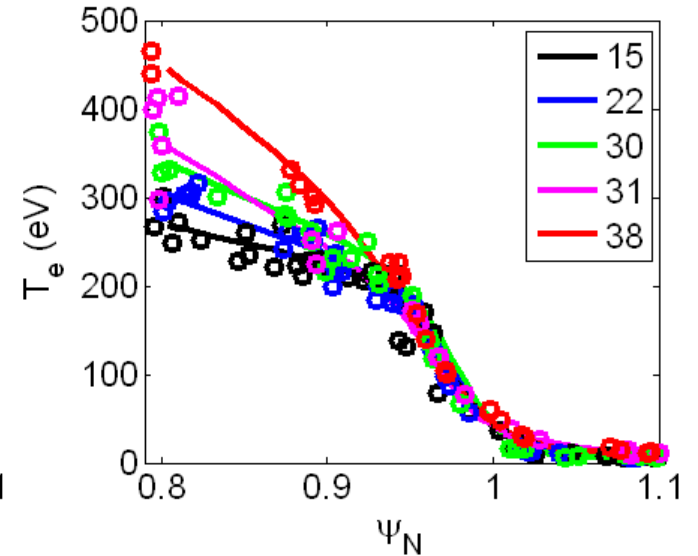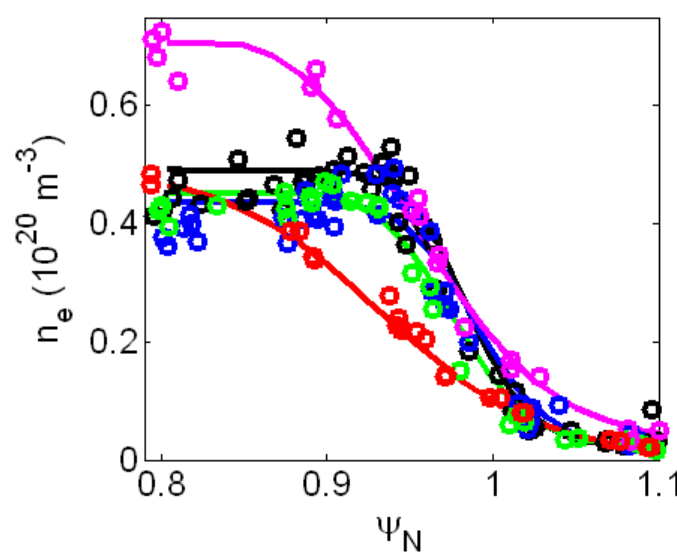



Edge reflectometry near pedestal top shows reduced density fluctuations with lithium

- Reduced transport in inner region->higher pedestal top pressure
- Reflectometer channel shows reduced fluctuation level
 - Most pronounced at low frequency (<50 kHz)
 - Caveats: density profile change, 2D effects make reduction in fluctuations difficult to quantify

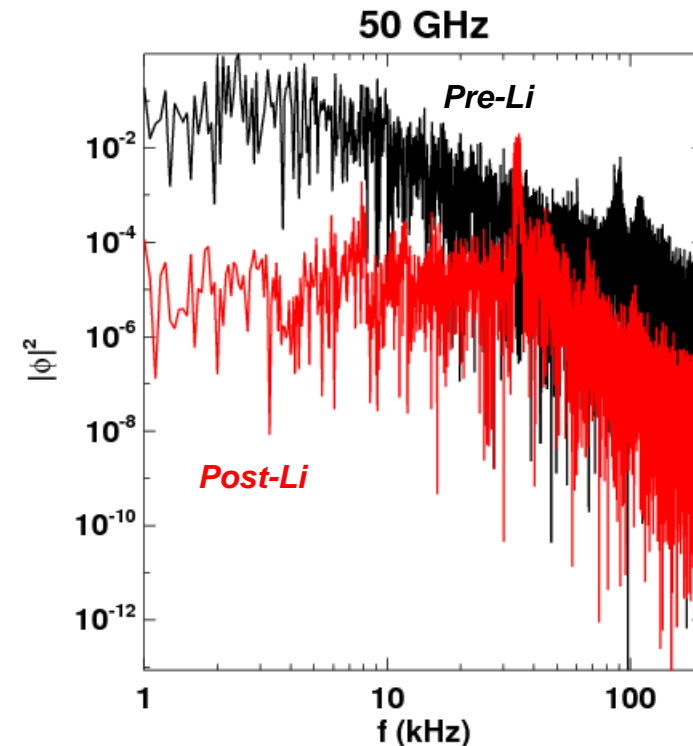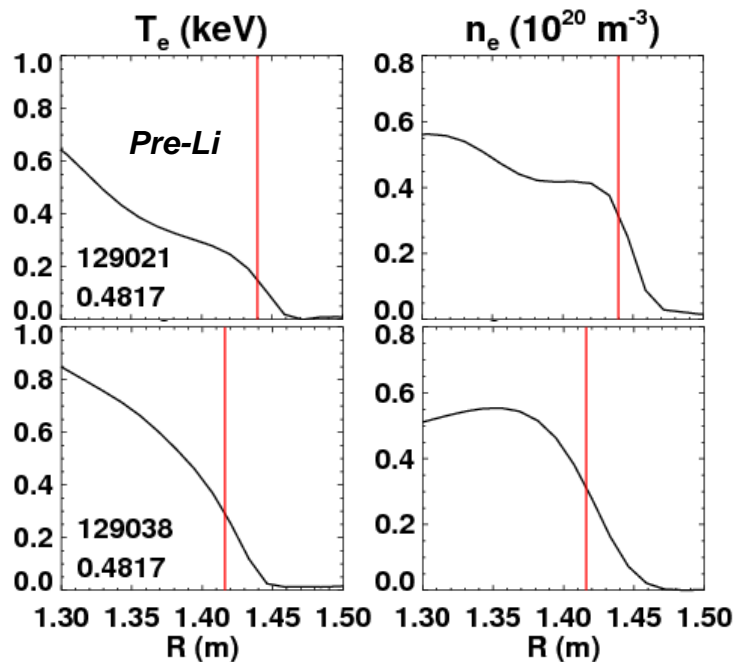



High-k scattering diagnostic shows little change in fluctuation amplitude at $k\rho_s > 10$

- Pre-to-post lithium transition repeated, similar profile changes observed
- Fluctuations similar for $k\rho_s > 10$, some reduction at lower k for the with-lithium case

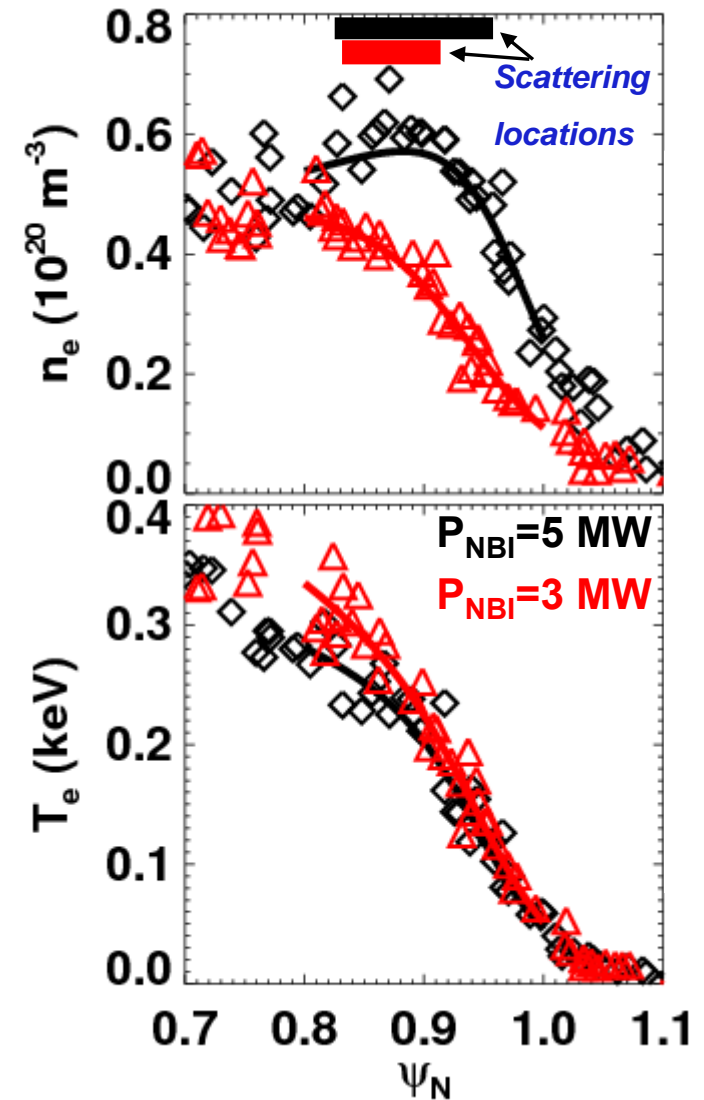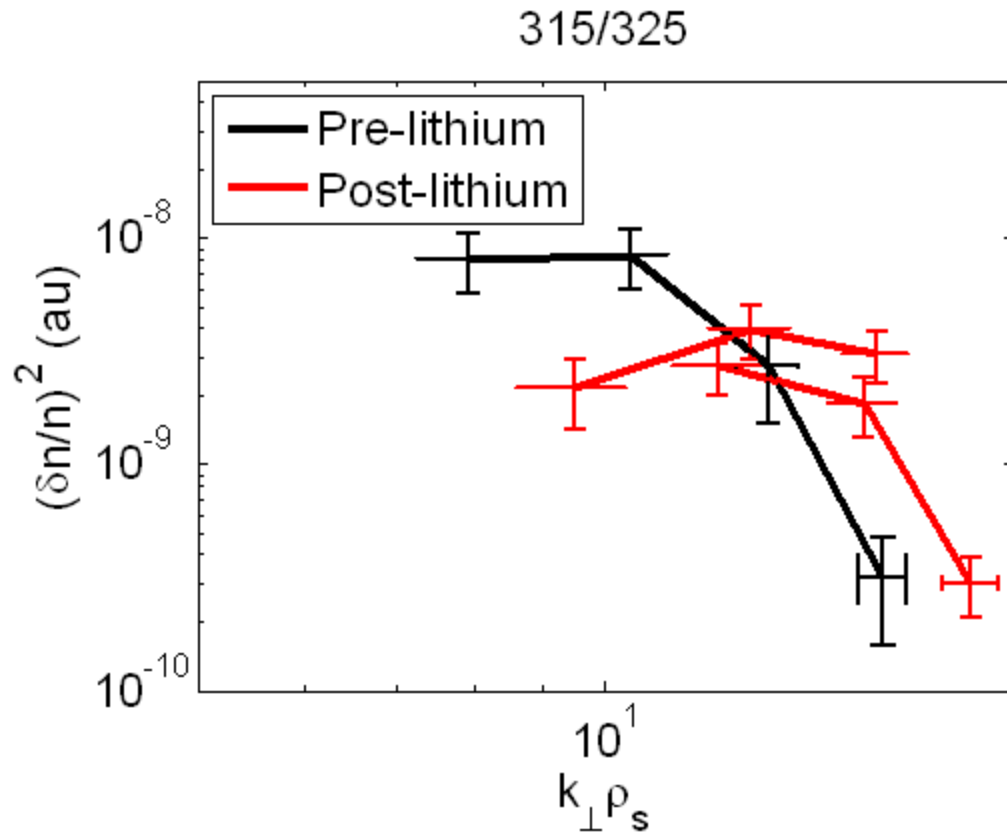

With power reduced so T_e profile matches pre-lithium case, fluctuation amplitudes show broad reduction


- Power reduced to 2 MW
- T_e profile similar to pre-lithium
- Fluctuation amplitude reduced across measured $k_{\perp}\rho_s$

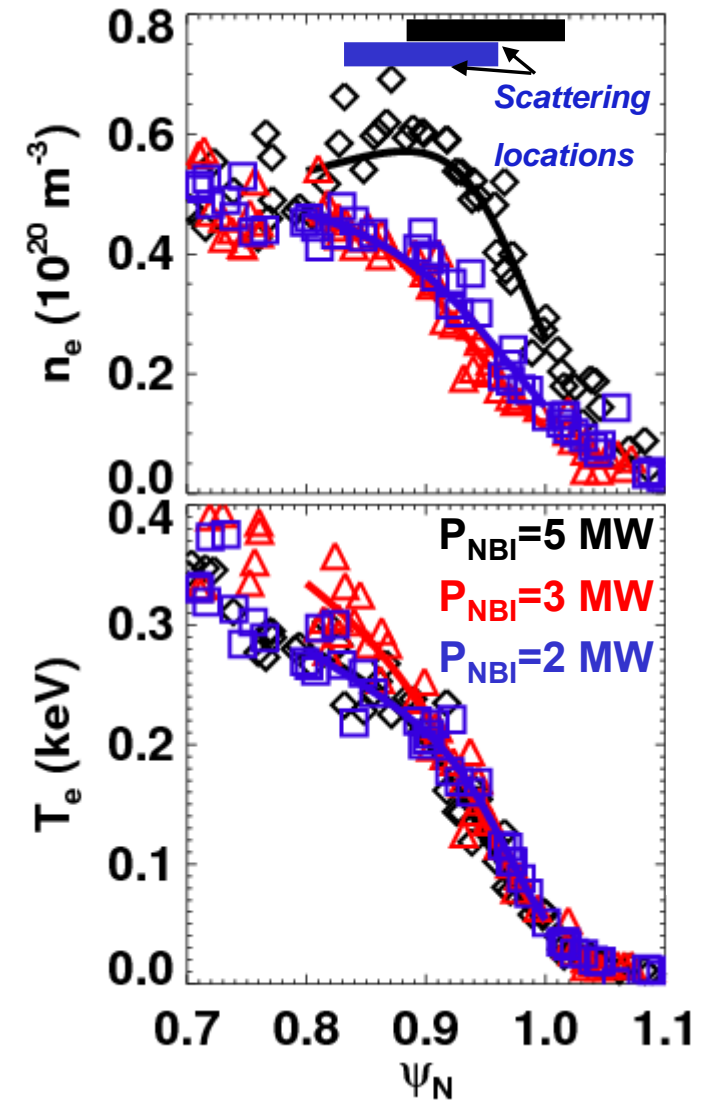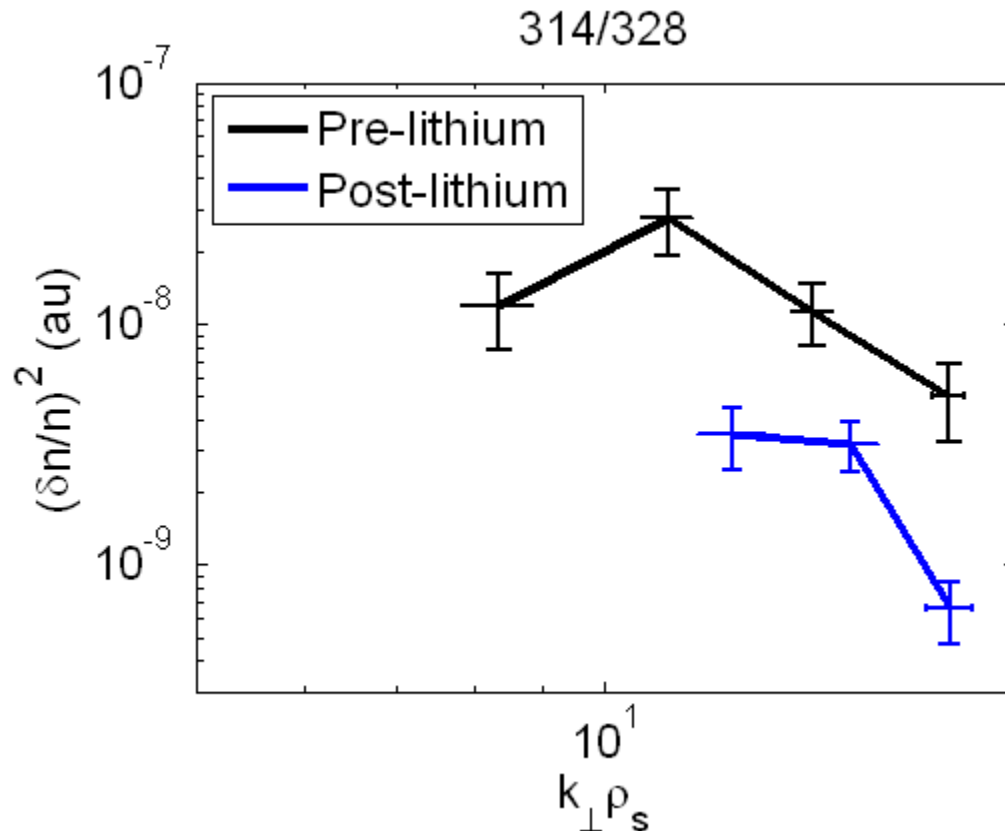




Carbon is included to model Z_{eff} profile

- Sputtering of carbon included, chemical sputtering yield of 2% assumed
- Same D_{\perp} for all species; carbon species given spatially constant inward convective velocity, adjusted to match measured carbon content
- Charge state distribution calculated by SOLPS, yields an estimate of Z_{eff} for comparisons to theory
- Transport modification is qualitatively unchanged with carbon

Pre-lithium: $V_{\text{pinch}} = 20 \text{ m/s}$

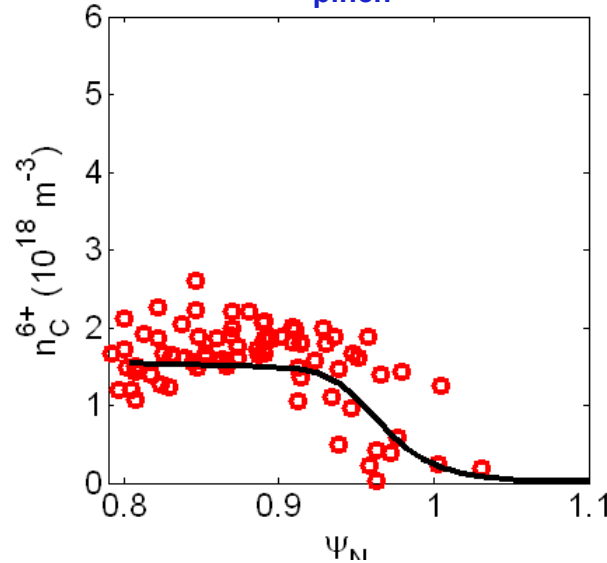

Post-lithium: $V_{\text{pinch}} = 15 \text{ m/s}$

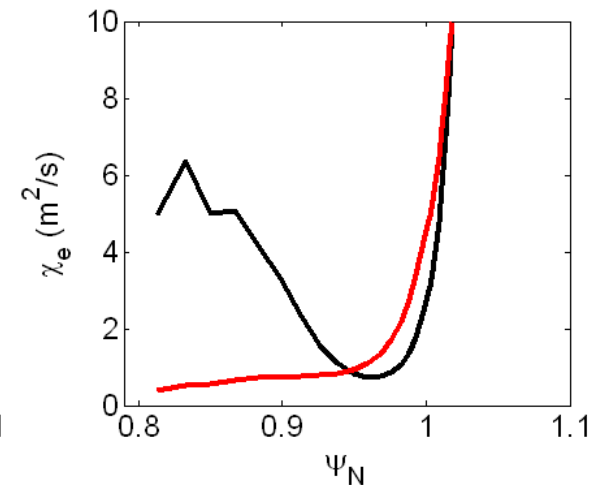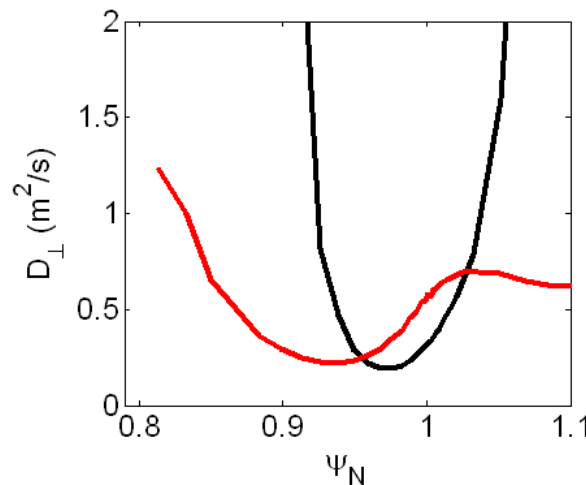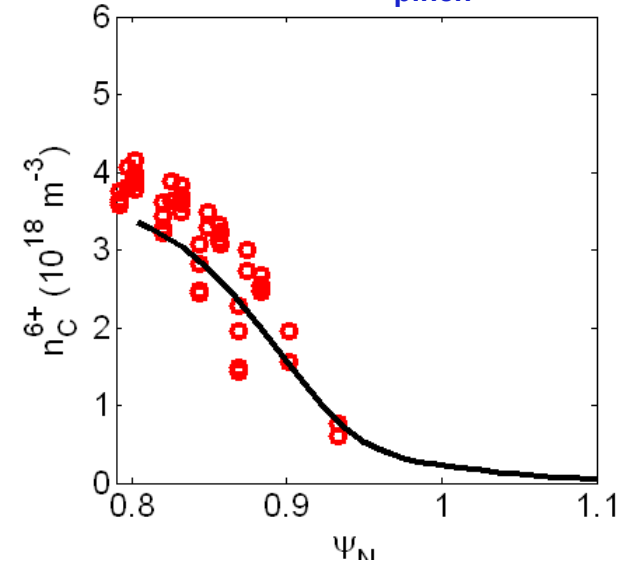

ETG is unstable in steep gradient edge

Initial linear GYRO [1] simulations predict:

- ETG unstable in steep gradient region ($\psi_N > 0.92$)
 - threshold likely set by density gradient
 - $\eta_{e,crit} \sim 1-1.25$ calculated in AUG edge [2], compared to core criteria $\eta_{e,crit} = 0.8$ [3]


$$\left[\frac{R}{L_{Te}} \right]_{crit} = \text{Max} \left(\begin{array}{c} 0.8 \cdot R / L_{ne} \\ (1 + Z_{eff} T_e / T_i) \cdot (1.3 + 1.9 \hat{s} / q) \cdot (\dots) \end{array} \right) \quad [3]$$

- ETG stable at top of pedestal ($\psi_N = 0.88$)
 - smaller density gradient
 - threshold more sensitive to $Z_{eff} T_e / T_i$ and s/q
- *Calculating thresholds and transport are work-in-progress*


[1] J. Candy & R.E. Waltz, PRL (2003); [2] D. Told et al., PoP (2008);

[3] F. Jenko et al., PoP (2001)

Pre-lithium


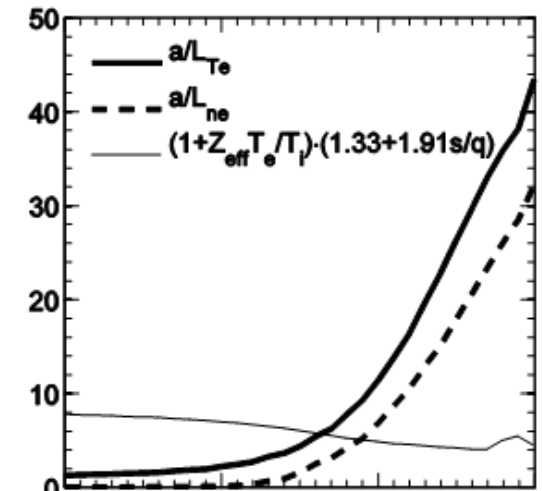


Post-lithium

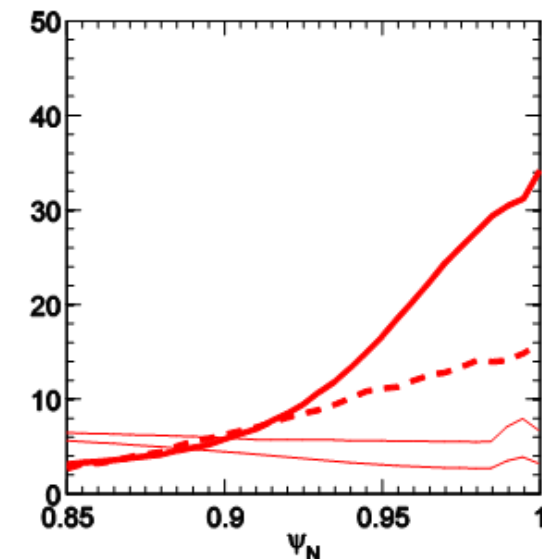

Measured pedestal modifications are consistent with paleoclassical transport

- Pedestal structure model based partly on paleoclassical transport proposed
 - J.D. Callen, UW-CPTC 10-9
 - Depends on resistivity profile $\rightarrow Z_{\text{eff}}$ changes important
- Model recovers χ_e magnitude, shape, rise near separatrix, as well as modest increase with lithium outside $\psi_N \sim 0.95$
- Density profile shape changes with lithium also captured by model



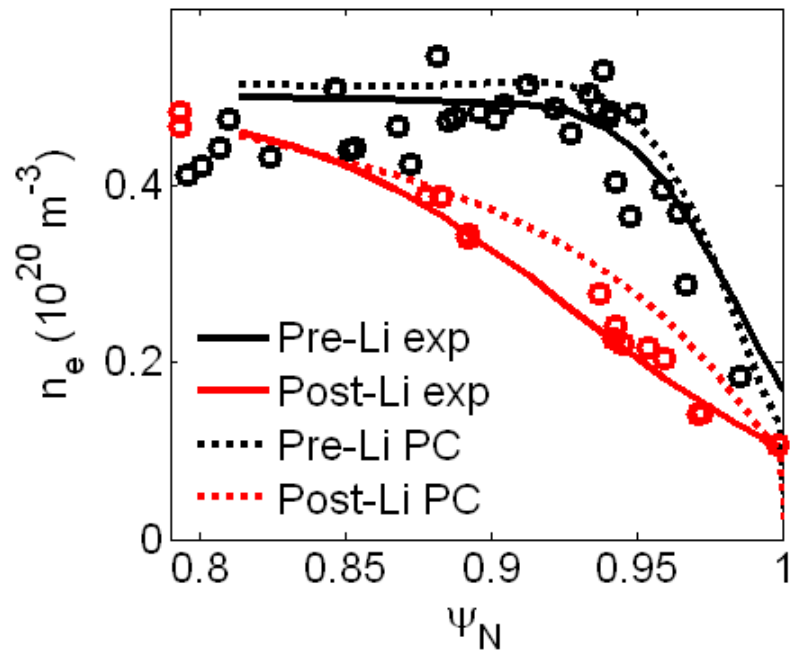
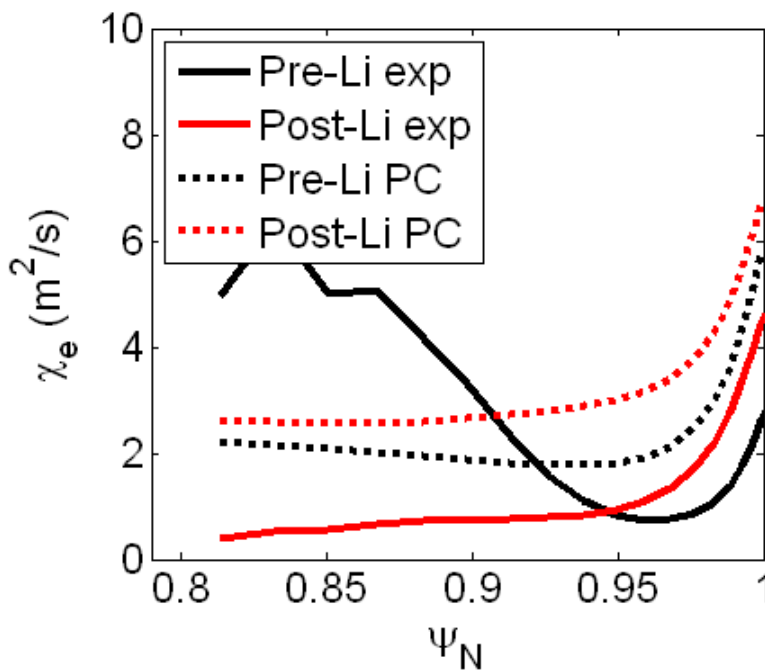


Summary

- Measured pedestal profile changes with lithium are reproduced in 2-D edge modeling
- Matching midplane profiles requires change to transport coefficients in addition to recycling
 - Transport barrier widens with lithium, giving wider pedestal
 - Te gradient relatively unchanged outside $\psi_N \sim 0.95$
- Fluctuation measurements show reduced edge turbulence in inner pedestal region
- Future research will focus on possible transport mechanisms

Widening of transport barrier persists when C is included in modeling

- D_{\perp} increases somewhat to counteract pinch
 - Now D_{\perp} increases in side $\psi_N \sim 0.9$ with lithium
 - Better to consider an “effective” diffusivity
- Two regions with different responses to lithium
 - Near-separatrix: transport fairly constant, maybe increased
 - Top of pre-lithium pedestal: transport greatly reduced

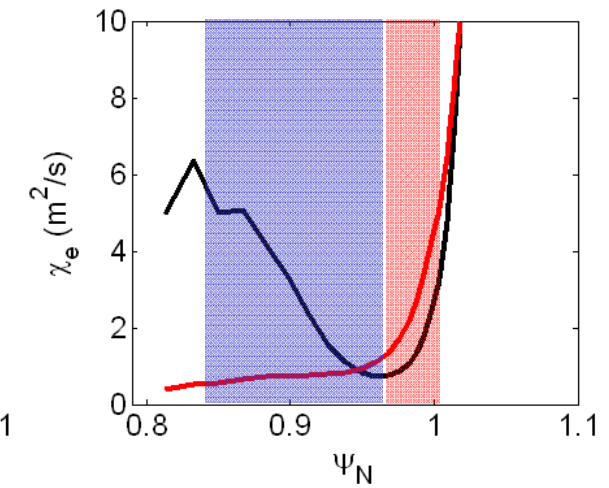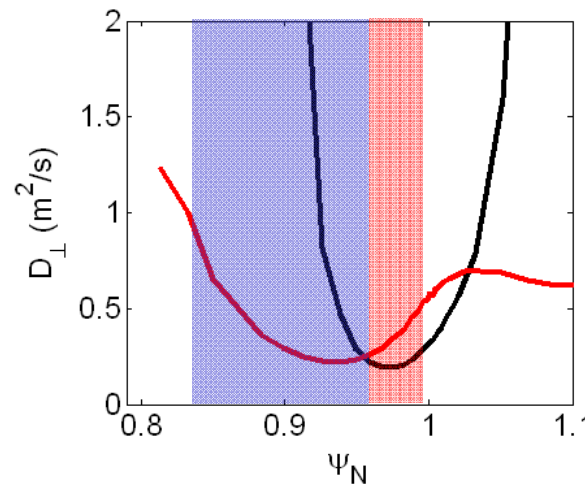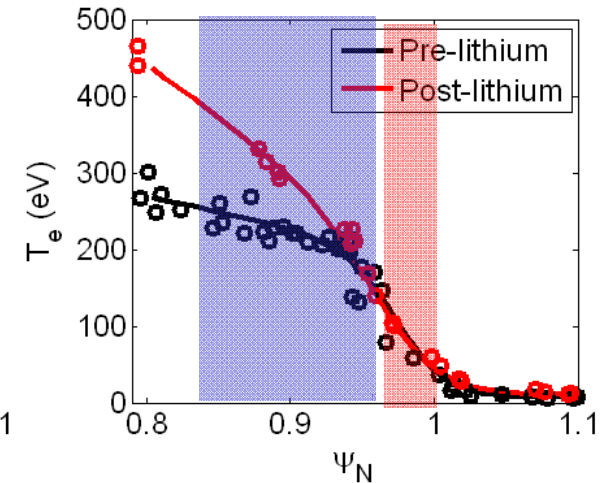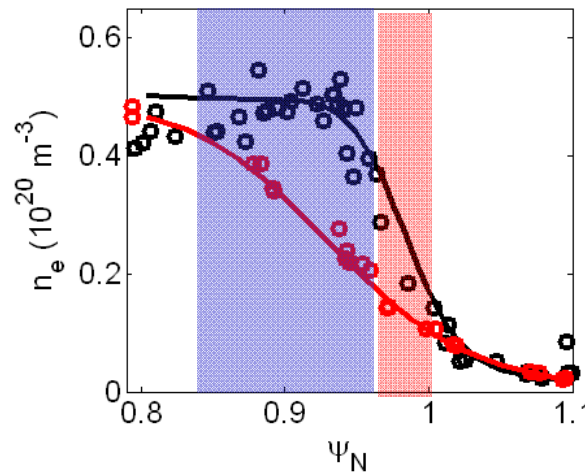

Carbon is the dominant impurity species with lithium coatings

- Measured lithium concentration is much less than carbon
 - Carbon concentration ~100 times higher
 - Carbon increases when lithium coatings are applied
 - Neoclassical effect: higher Z accumulates, low Z screened out
- Increase in n_C due to lack of ELMs
 - Can be mitigated by triggering ELMs

