

Supported by



Requirements For An Advanced Fueling System

Roger Raman, Thomas R. Jarboe
University of Washington, Seattle

Henry W. Kugel
Princeton Plasma Physics Laboratory

FESAC Panel Meeting
PPPL, 7 August 2007

Work supported by DOE grant No. DE-FG03-02ER54686

Reactor Fueling Requirements Not Adequately Addressed At Present

- Present systems may be inadequate
 - Pellets sizes are large & injection is shallow
 - No plan at present for density profile control
- Density profile control may be the ideal method for steady burn control
- Compact Toroid (CT) injection system has potential for density profile control and momentum injection
 - Brief summary
 - Open issues
 - Plans and suggestions


Flexible fueling system may be the only choice for burn control

- A burning plasma device has no need for neutral beam injection for plasma heating and alphas are isotropic → **no momentum injection**
- In a device with high bootstrap current fraction, optimized density and pressure profiles must be maintained → **fueling system must not adversely perturb established density and pressure profiles**
- Other than a system for current drive, a fueling system is all that a burning plasma system may be able to rely on to alter core plasma conditions and for burn control
 - **Fusion power output scales as the square of density**
 - Initial density peaking via. core fuelling provides more flexibility to reach ignition

Fueling profiles from present systems

- Pellets ($< 1\text{km/s}$, HFS)
 - Large pellets increases density over a large radius
 - Capability of small pellets for profile control yet to be established
- Supersonic gas ($\sim 2\text{-}3\text{ km/s}$)
 - Fuels from the edge with improved fueling efficiency
 - Capability for profile control not known yet
- Plasma jet ($\sim 30\text{km/s}$)
 - Similar to supersonic gas, bulk fueling at present
 - Penetration into large cross-section plasmas not known

In a CT injection system a CT is accelerated to high velocity and injected into the target plasma to achieve deep fueling

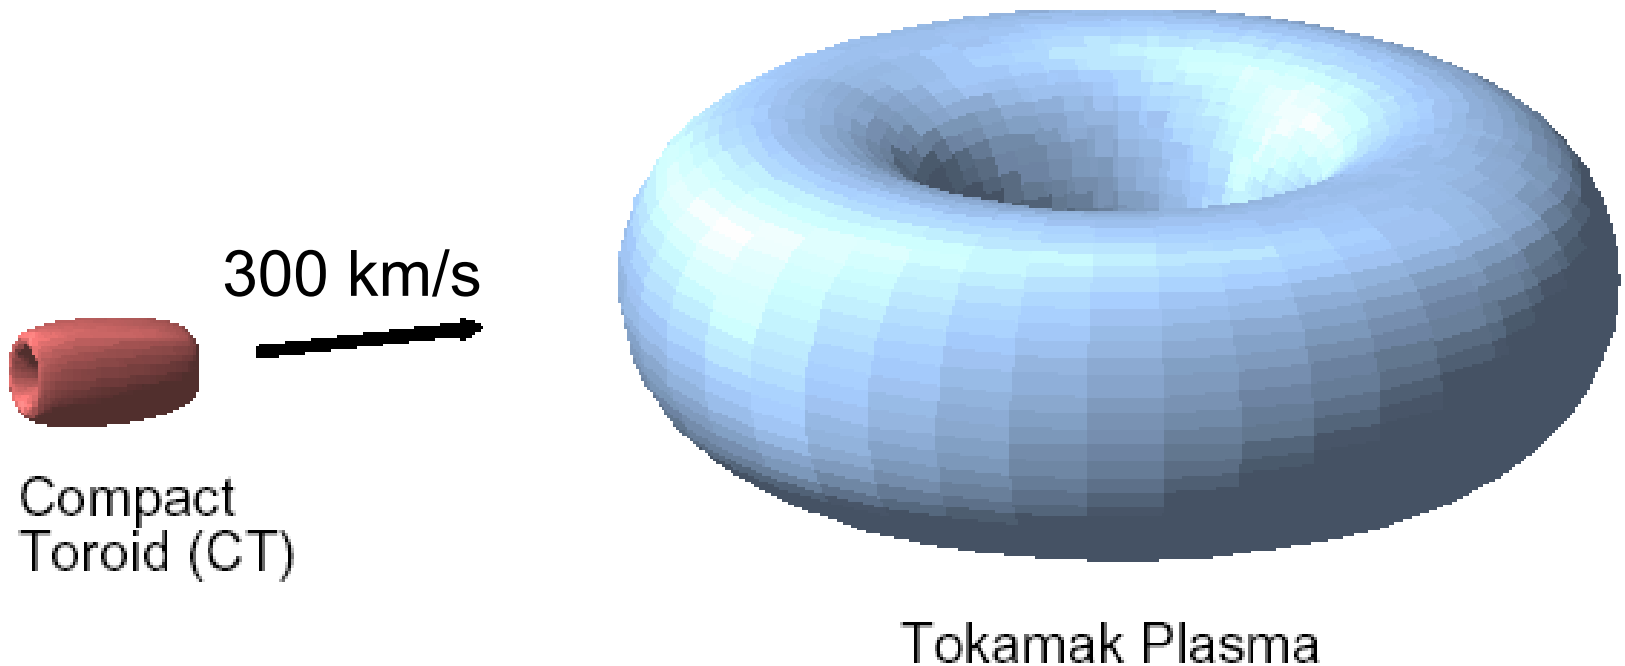


CT Penetration time: few μs

CT Dissociation time: $< 100 \mu\text{s}$

Density Equilibration time: 250 - 1000 μs

Variable Penetration depth: edge to beyond the core

A CT Fueller forms and accelerates CTs in a coaxial rail gun in which the CT forms the sliding armature

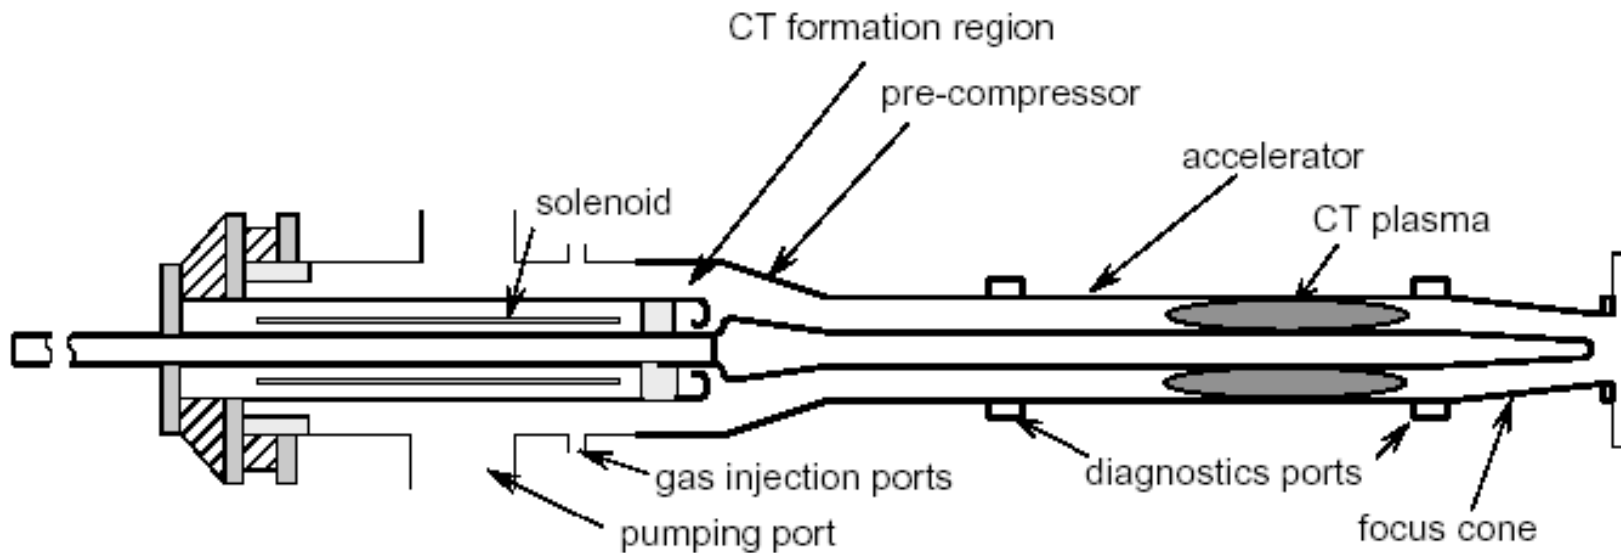


- Amount of gas injected controls CT density
- Applied voltage controls CT velocity

Control system specifies fuel deposition location for each pulse

Status of current work

TdeV tokamak discharges beneficially fueled by CTs,
without causing any adverse perturbation

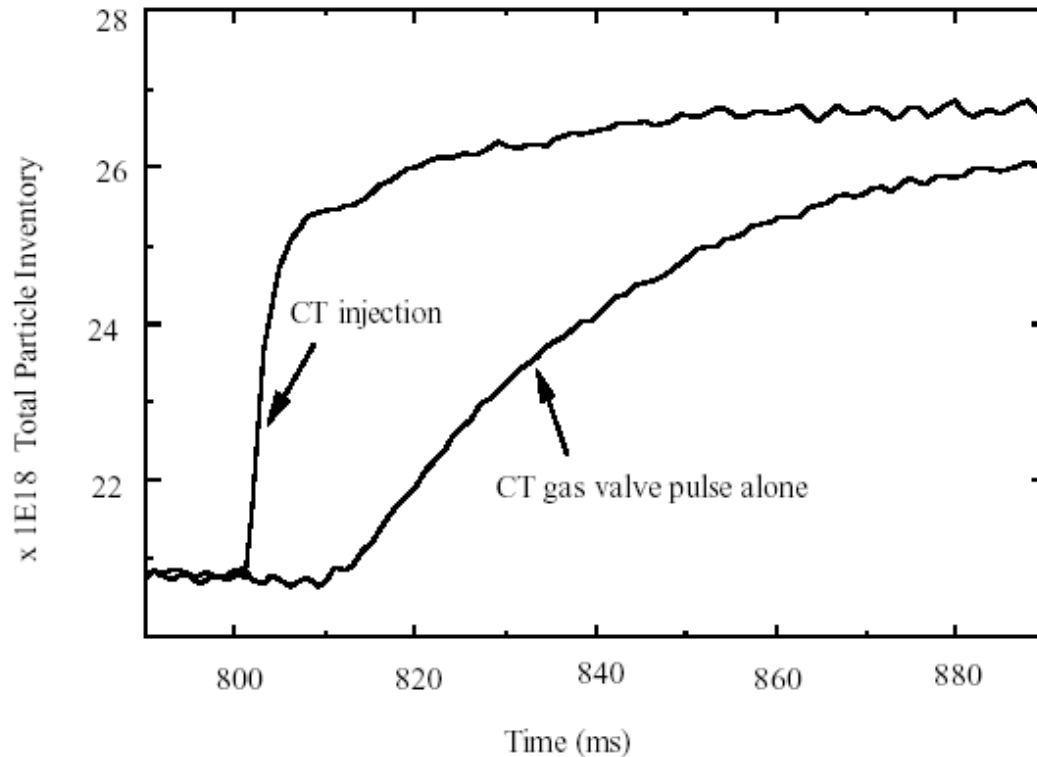

TdeV


$R = 0.86\text{m}$

$a = 0.25\text{m}$

$B_T = 1.4\text{T}$

$I_p = 160\text{kA}$

Conceptual study of a CT system for ITER yields an attractive design

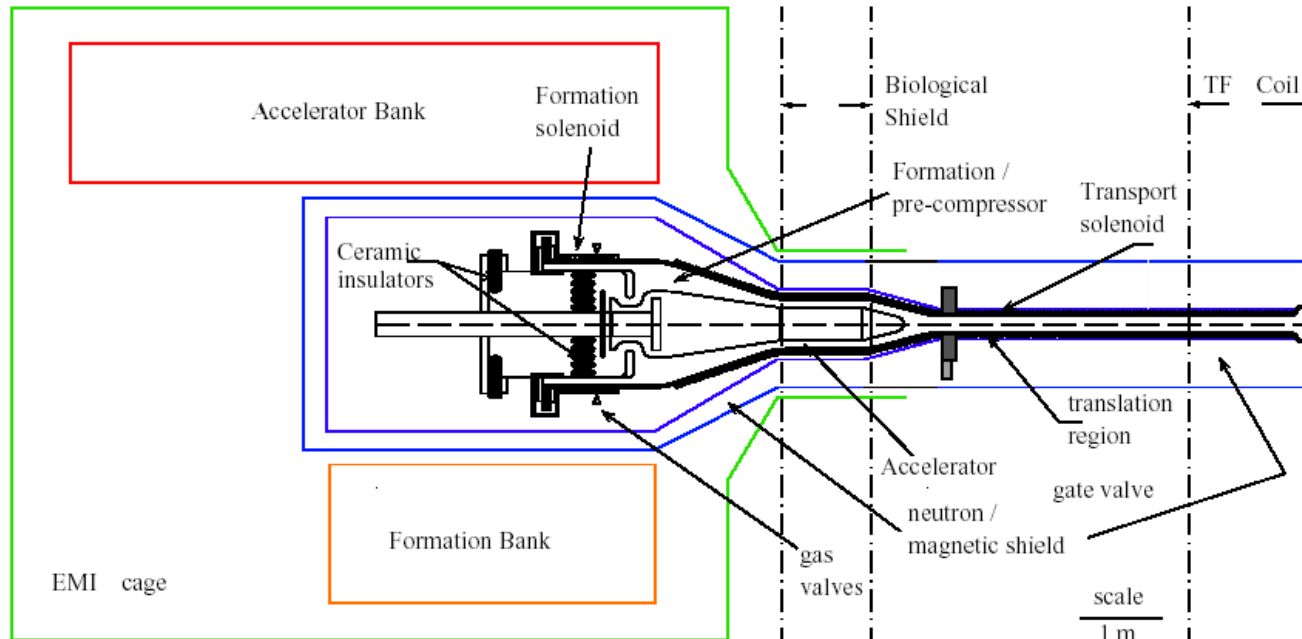


<1% particle inventory perturbation, 20 Hz operation

R. Raman and P. Gierszewski, ITER Task D315 (1997), Fusion Engin. & Design **39-40** (1998) 977-985

Open Issues

Previous experiments too small to study localized core fueling

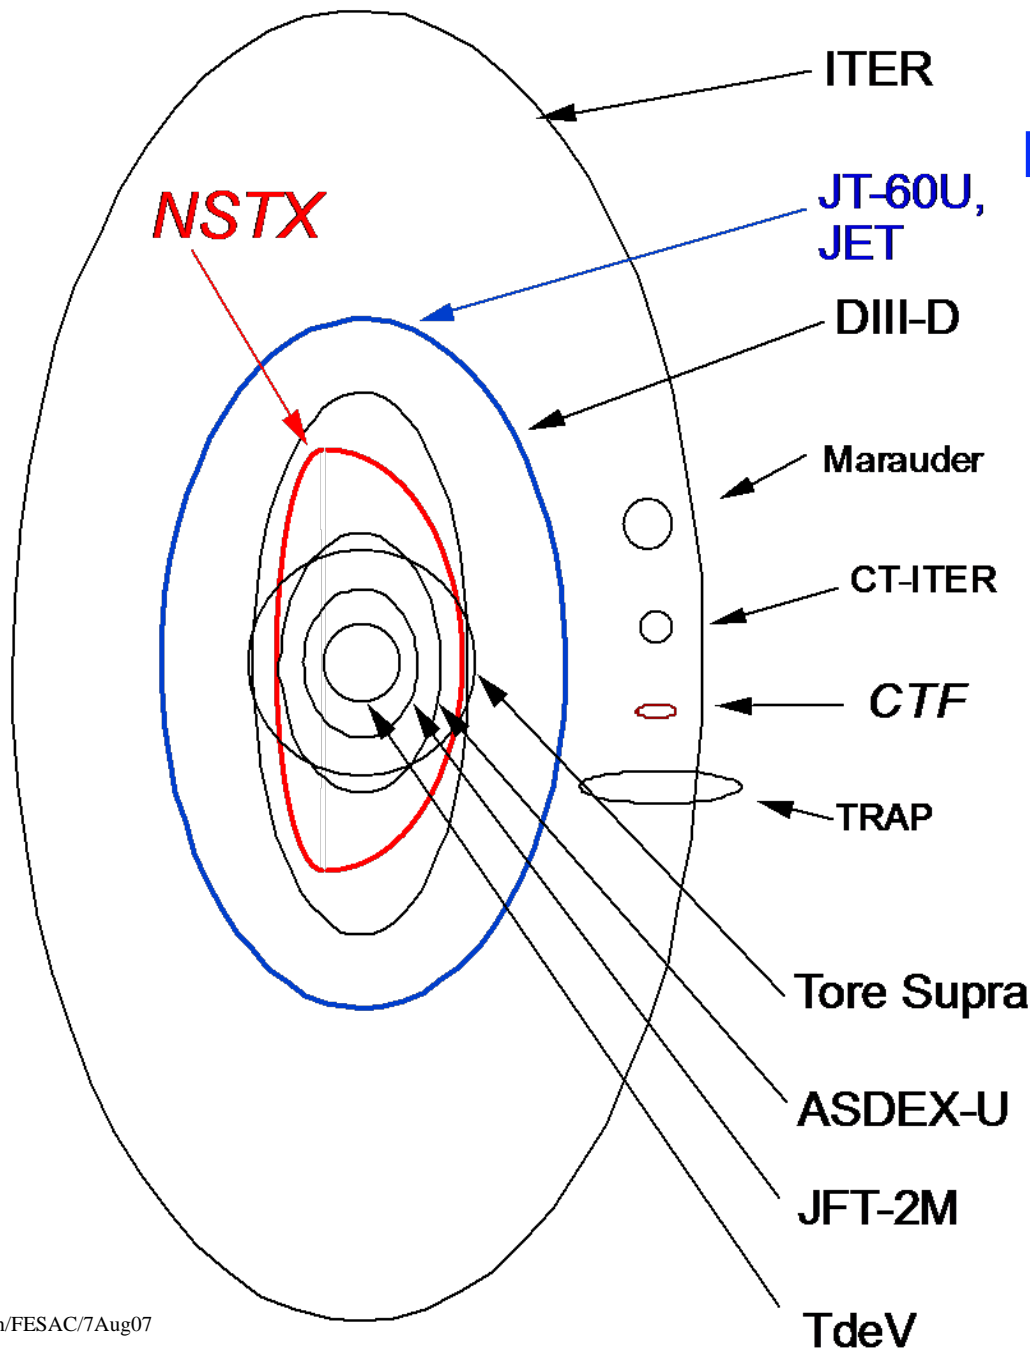

Approximate relative sizes of various target plasmas and CTs.

A CTF sized CT will do far more localized fueling on a NSTX sized device

- Steep B_T more precisely determines CT stopping location

Ref: R. Raman and K. Itami, Journal of Plasma and Fusion Research, **76**. 1079 (2000)


Proposed research Plan

- Injection into a large cross-section, low field device (eg., NSTX) - *using an existing injector*
 - Establish localized fueling (~ 2 yrs)
 - Transport studies
 - Establish momentum injection (~ 3 yrs)
- Establish multi-pulse fueling
 - Requires injector modifications
- Larger scale experiments (DIII-D, JT-60U, JET)

The CTF-II injector (in storage at PPPL)



The CT Formation bank power supply (110V AC input)

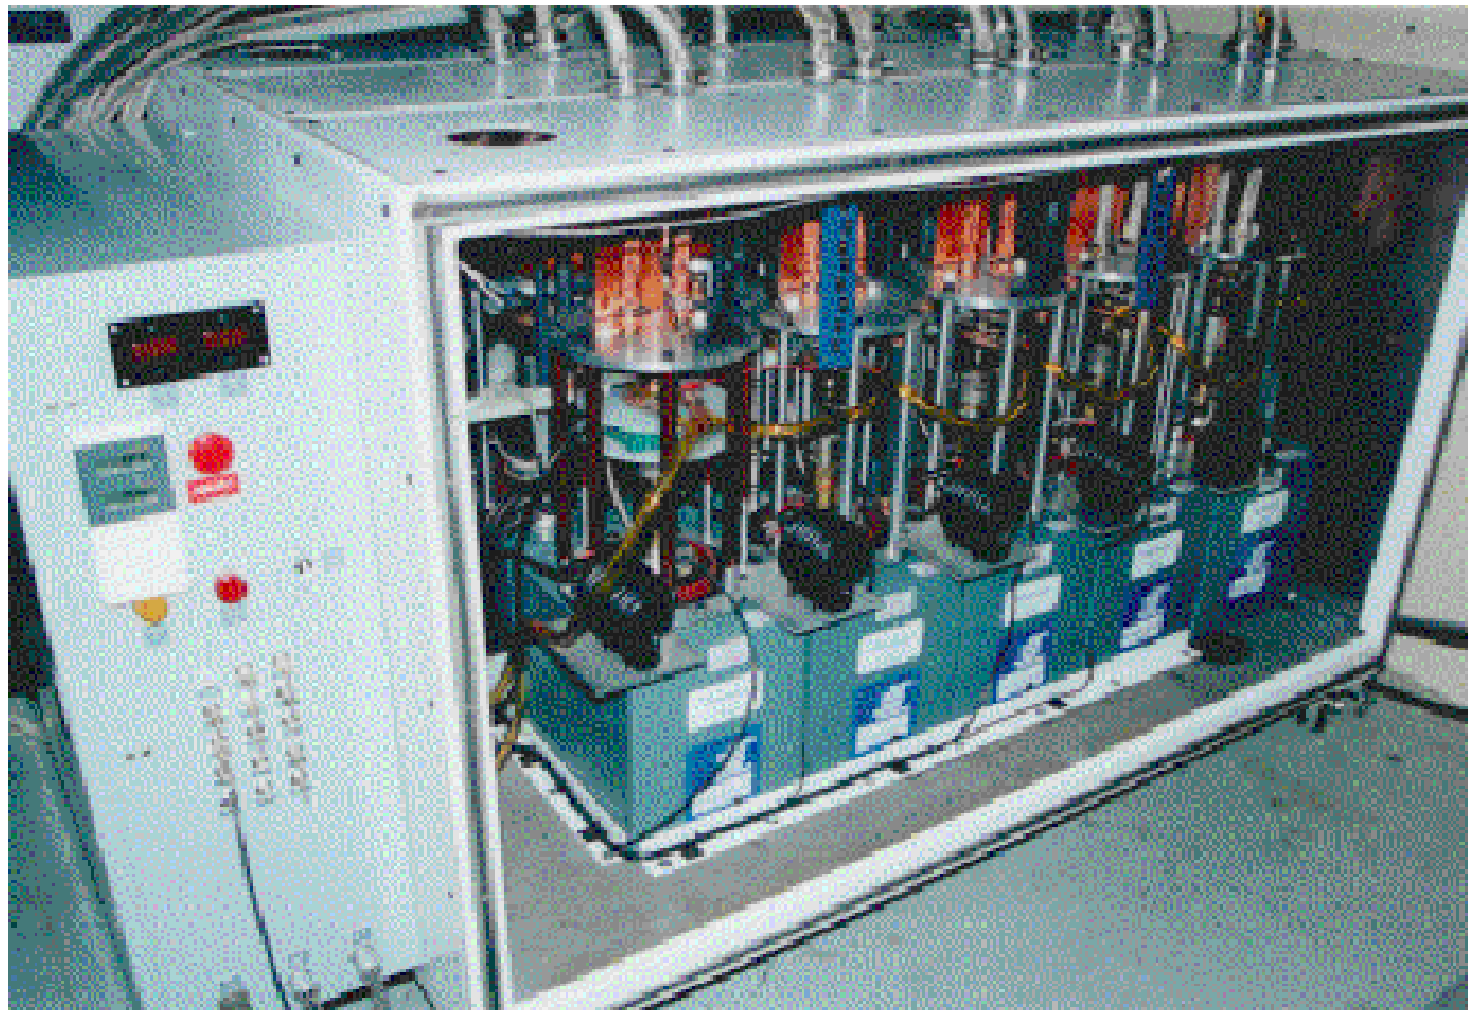

A CT injector could provide profile control capability

	CT	Pellet
Particle invent. perturbation for deep fueling	<p>Few %</p> <p>- will not destroy optimized profiles, allows precision fueling capability to adjust profiles</p>	<p>Typically 50% on DIII-D</p> <p>- large pellets needed to deposit small fraction of fuel in core</p>
Optimal injector location	<p>Outboard mid-plane</p> <p>- tangential injection will impart momentum</p>	<p>‘True’-Inboard mid-plane</p> <p>- injection at an angle reduces penetration</p>
Real time density feedback control capability	<p>Yes - potential for fuel deposition location specification on each pulse using control system request</p> <p>- Also a source of momentum injection</p>	<p>Improbable because large pellets fuel entire discharge and mechanical nature of injector reduces fueling flexibility</p>

Conclusions

- A CT injector has the potential to deposit fuel in a **controlled** manner at any point in the machine
- In a burning plasma device with only RF for current drive, a flexible fueling system may be the only internal profile control tool
 - Inject momentum for plasma beta and stability
 - Precise density profile control to optimize bootstrap current and to maintain optimized fusion burn conditions
 - Study core transport in present machines (He ash removal studies, ELM control)
- Large tokamaks should consider and develop backup options to meet the fuelling and burn control requirements of a burning plasma device
 - Large STs are an attractive target for developing CT fueling
 - **Steep B_T gradient, large cross-section**
- A CT Test on NSTX has the short term potential for impacting the fusion development path
 - It has the potential to meet the needs of predictable, high-performance steady-state burning plasmas