


# XP804: Comparison of NTV among tokamaks ( $n = 2$ fields, $v_i$ scaling)

S.A. Sabbagh<sup>1</sup>, R.E. Bell<sup>2</sup>, J.W. Berkery<sup>1</sup>, J.M. Bialek<sup>1</sup>,  
S. Gerhardt<sup>2</sup>, B. LeBlanc<sup>2</sup>, J.E. Menard<sup>2</sup>, K. Tritz<sup>3</sup>

<sup>1</sup>*Department of Applied Physics, Columbia University, New York, NY*

<sup>2</sup>*Plasma Physics Laboratory, Princeton University, Princeton, NJ, USA*

<sup>3</sup>*Johns Hopkins University, Baltimore, MD, USA*

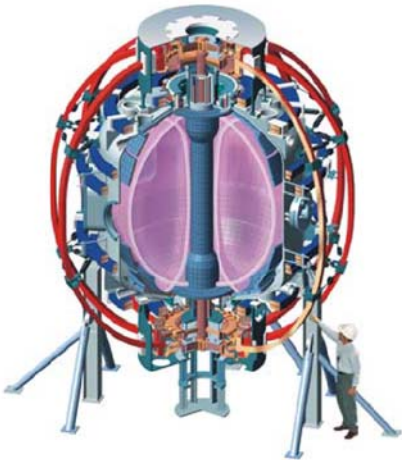

**NSTX Team Review Meeting**

March 5th, 2008

Princeton Plasma Physics Laboratory

Columbia U  
Comp-X  
General Atomics  
INEL  
Johns Hopkins U  
LANL  
LLNL  
Lodestar  
MIT  
Nova Photonics  
NYU  
ORNL  
PPPL  
PSI  
SNL  
UC Davis  
UC Irvine  
UCLA  
UCSD  
U Maryland  
U New Mexico  
U Rochester  
U Washington  
U Wisconsin  
Culham Sci Ctr  
Hiroshima U  
HIST  
Kyushu Tokai U  
Niigata U  
Tsukuba U  
U Tokyo  
JAERI  
Ioffe Inst  
TRINITI  
KBSI  
KAIST  
ENEA, Frascati  
CEA, Cadarache  
IPP, Jülich  
IPP, Garching  
U Quebec

# XP804: Comparison of neoclassical toroidal viscosity (NTV) among tokamaks ( $n = 2$ fields, $v_i$ scaling)

## ● Goals

- Compare NTV results/analysis on NSTX to other devices
  - $n = 2$  data available JET, C-MOD, initial results in MAST (plan to submit 08 XP)
  - Proposal submitted in 2008 to DIII-D, morphed into different XP
- Test NTV theory for  $n = 2$  applied field configuration
  - $n = 2$  may be best for comparison to other devices ( $n = 1$  strongest resonant rotation damping,  $n = 3$  weak in some devices, many machines run  $n = 2$ )
  - Examine possible RFA effects by varying proximity to no-wall limit
- Investigate damping over widest possible range of ion collisionality to determine affect on rotation damping and compare to theory
  - Key for ITER, comparison to other devices important
- Supplement past published NSTX results (XP524) using  $n = 1, 3$  fields
  - Modifications to theory to be examined (e.g. multiple trapping states)
  - Reversed  $I_p$  operation may allow  $\omega_\phi$  offset term measure ( $\sim$  few kHz)


## ● Addresses

- Joule milestone, leverages ST geometry
- ITER support (RWM coil design), ITPA joint experiment MDC-12



# Observed rotation decrease follows NTV theory

## $n = 3$ applied field configuration

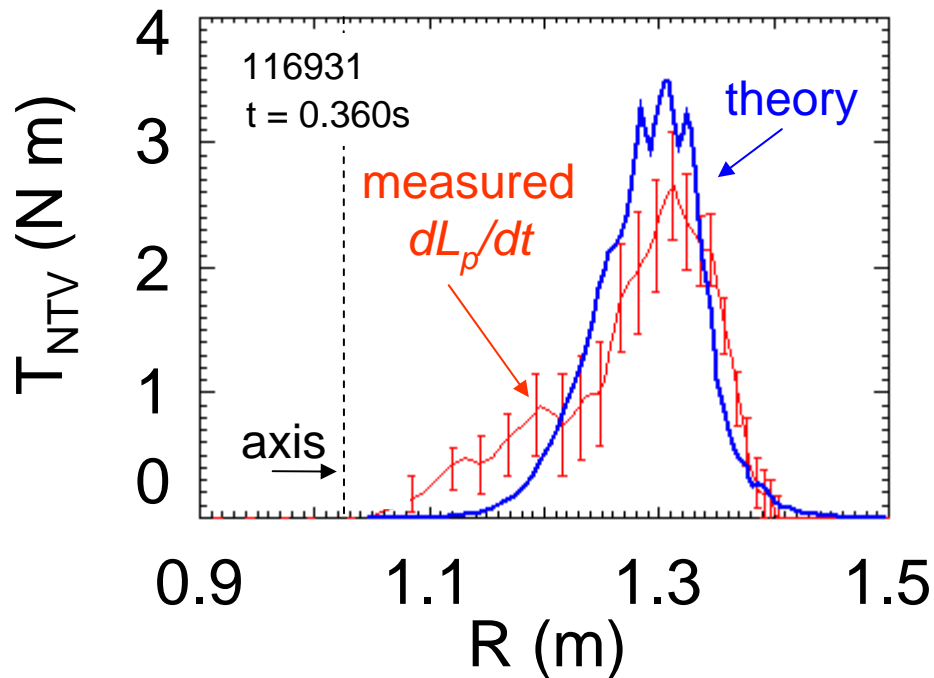


(Zhu, et al., PRL **96** (2006) 225002.)

- Further test NTV theory; compare to other devices
  - Trapped particle effects, 3-D field spectrum important for quantitative agreement
  - Scales as  $\delta B^2 (p_i/v_i) (1/A)^{1.5}$
  - Low collisionality,  $v_i$ , ITER plasmas expected to have higher rotation damping
  - Saturation of  $1/v_i$  scaling expected by theory, can it be found?
- Approach

- Use  $n = 2$  field to slow  $\omega_\phi$  at low, high  $\beta_N$  (check RFA)
- Vary collisionality (as in past XPs) to produce  $\sim$  at least a factor of 2 variation in NSTX



# Significant differences in $|B|$ between $n = 1, 2, 3$ applied field configurations

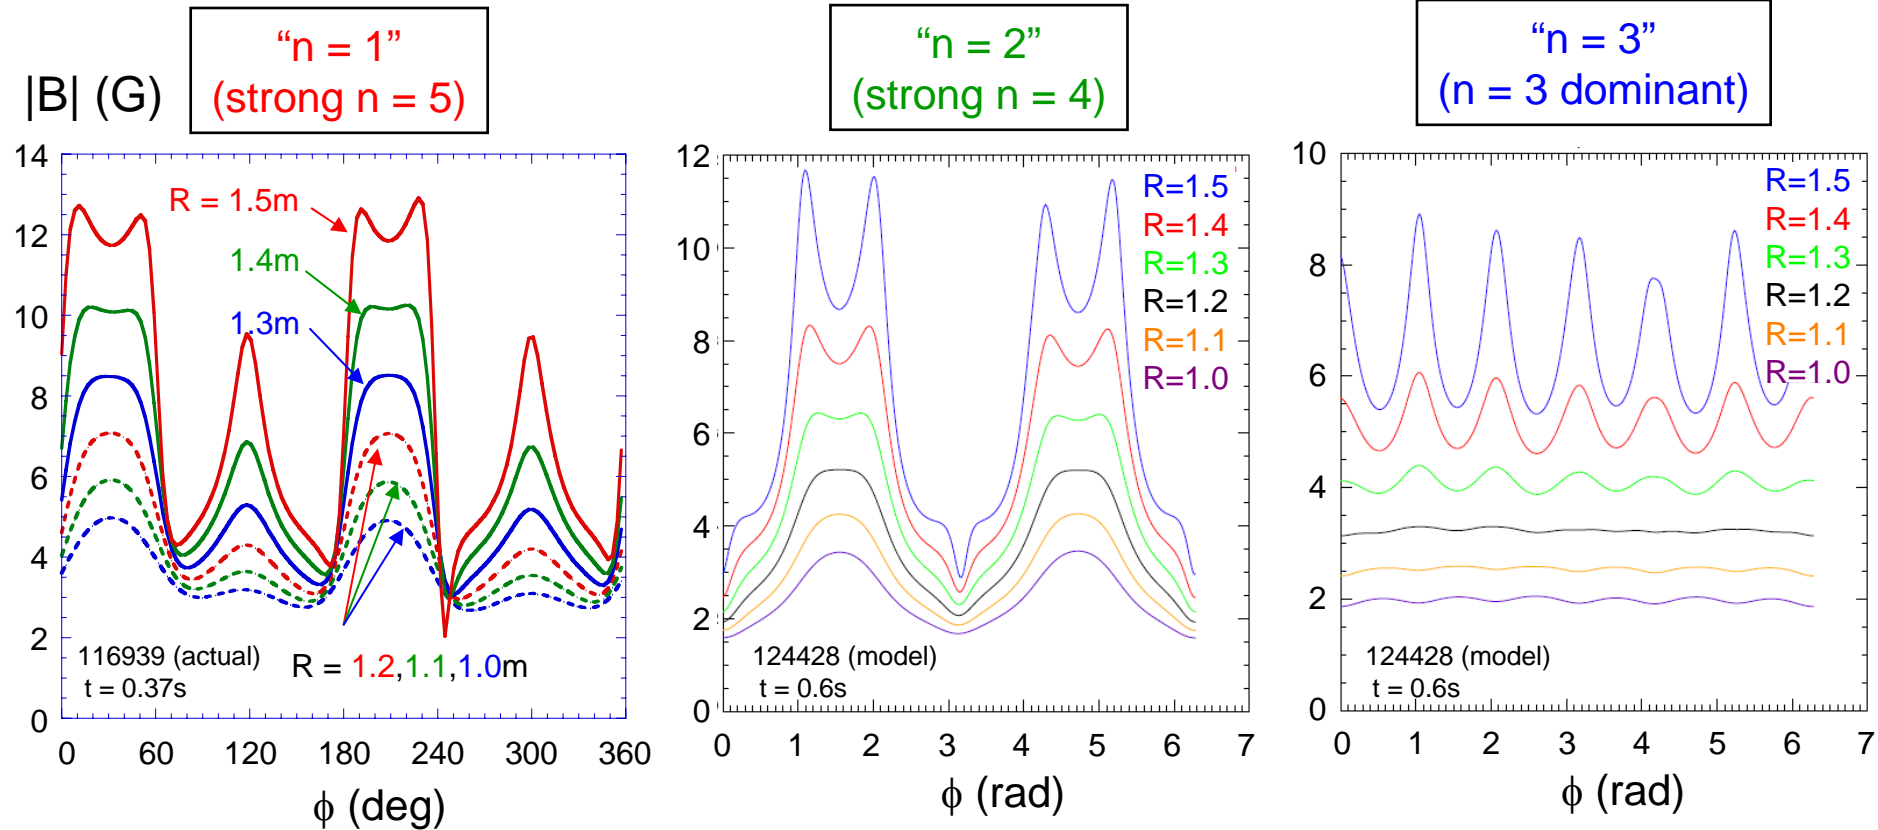


- Field more uniform vs. toroidal angle in higher  $n$  configuration
- Smaller  $n$  spectrum in higher  $n$  configuration

# Broader field spectrum in $n = 2$ config vs. $n = 3$ config


“ $n = 3$  configuration”

Spectrum at  $r/a=0.8$

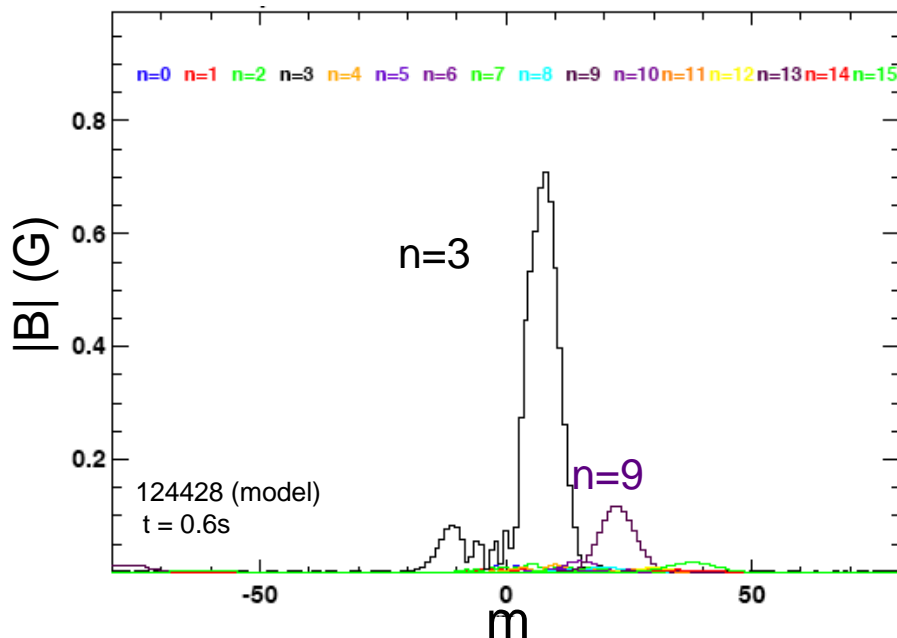

“ $n = 2$  configuration”

Spectrum at  $r/a=0.8$

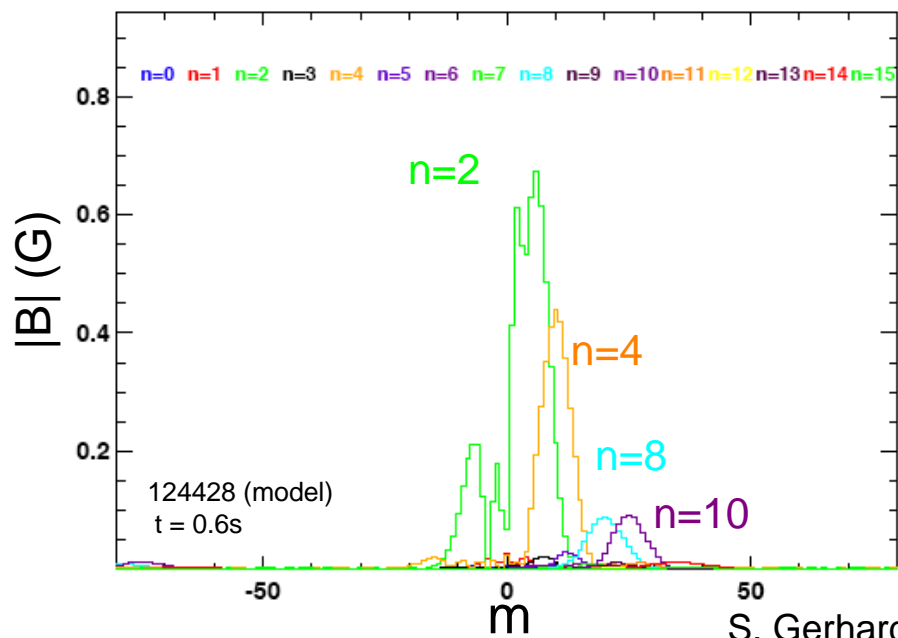

S. Gerhardt

- Broader spectrum and greater radial penetration should lead to larger NTV damping and extended radial profile
- $n = 2$  configuration has very small  $n = 1$  component – reduces resonant braking and  $n = 1$  NTV due to RFA



# XP804: NTV $n = 2$ and $v_i$ - Run plan

<u>Task</u>	<u>Number of Shots</u>
1) <u>Create targets (i) below, but near and (ii) above ideal no-wall beta limit (control shots)</u> (use 120038 as setup shot, 2 or 3 NBI sources, relatively high $\kappa \sim 2.4$ to avoid rotating modes)	
A) No $n = 2$ applied field; 3, then 2 NBI sources	2
2) <u>Apply <math>n = 2</math> field</u>	
A) Step up $n = 2$ currents during discharge in 75ms steps, 3 NBI sources	2
B) Step up $n = 2$ currents during discharge in 75ms steps, 1 or 2 NBI sources	2
C) $n = 2$ DC pulse at steady $\omega_\phi$ , measure spin down, pulse off to measure $\omega_\phi$ spin-up, 3 NBI	3
D) $n = 2$ DC pulse at steady $\omega_\phi$ , measure spin down, pulse off to measure $\omega_\phi$ spin-up, 1 or 2 NBI	3
E) $n = 6$ DC pulse at steady $\omega_\phi$ , measure spin down, pulse off to measure $\omega_\phi$ spin-up, 3 NBI	3
3) <u>Ion collisionality scan</u>	
A) Vary $v_i$ at constant $q$ , apply $n = 2$ field during period free of strong rotating modes	8
B) Increase $n = 2$ field at collisionality where damping is weakest	3
4) <u>Reversed <math>I_p</math> scans</u>	
A) Repeat scans 1 and 2 above in reversed $I_p$	13
Total (standard $I_p$ ; reversed $I_p$ ): 26 ; 13	

---

---

# XP804: NTV $n = 2$ and $v_i$ - Diagnostics

- Required diagnostics / capabilities

- Ability to operate RWM coils in  $n = 2$  configuration
- Internal RWM sensors
- CHERS toroidal rotation measurement
- Thomson scattering
- USXR
- MSE
- Toroidal Mirnov array / between-shots spectrogram with toroidal mode number analysis
- Diamagnetic loop

- Desired diagnostics

- FReTip
- Fast camera

