



Supported by



U.S. DEPARTMENT OF
ENERGY

Office of
Science


Recycling, pumping and impurity studies with lithium-coated molybdenum PFCs

V. A. Soukhanovskii, H. W. Kugel

Acknowledgements: NSTX Team

**NSTX Lithium Research TSG meeting
Princeton, NJ
Tuesday, 14 June, 2011**

College W&M
Colorado Sch Mines
Columbia U
CompX
General Atomics
INEL
Johns Hopkins U
LANL
LLNL
Lodestar
MIT
Nova Photonics
New York U
Old Dominion U
ORNL
PPPL
PSI
Princeton U
Purdue U
SNL
Think Tank, Inc.
UC Davis
UC Irvine
UCLA
UCSD
U Colorado
U Illinois
U Maryland
U Rochester
U Washington
U Wisconsin

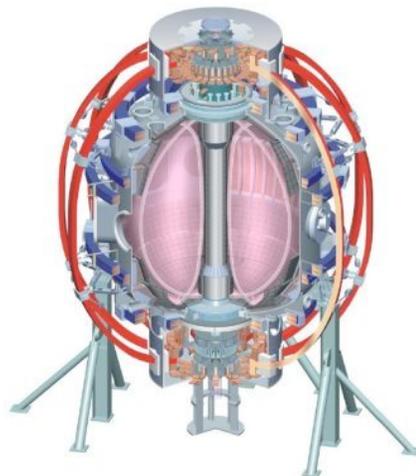

Culham Sci Ctr
U St. Andrews
York U
Chubu U
Fukui U
Hiroshima U
Hyogo U
Kyoto U
Kyushu U
Kyushu Tokai U
NIFS
Niigata U
U Tokyo
JAEA
Hebrew U
Ioffe Inst
RRC Kurchatov Inst
TRINITY
KBSI
KAIST
POSTECH
ASIPP
ENEA, Frascati
CEA, Cadarache
IPP, Jülich
IPP, Garching
ASCR, Czech Rep
U Quebec

Plasma-surface interaction with lithium-coated molybdenum PFCs will be studied in this XP


- Three main deliverables anticipated
 - Recycling in inner and outer divertor strike point regions
 - Lithium coating longevity and interaction with ion fluxes in outer strike point region
 - Molybdenum erosion from lithium-coated divertor molybdenum targets and molybdenum core screening
 - (Carbon sources in Scotti's XP)

... as functions of lithium coating thickness, SOL power, divertor ion flux density


- Connect with LITER 2008 and LLD 2010 analysis
- Provide information for NSTX-U PFC options and lithium strategies
- Connect with other divertor tokamak experience
 - Alcator C-Mod – all molybdenum PFCs with boron coatings and lithium pellet PFC conditioning
 - ASDEX-Upgrade – mixed tungsten and graphite PFCs and boron coatings

Vary divertor power, ion flux density and lithium rate to study lithium-coated moly PFC

- High-triangularity configuration with PF1B and carbon (inner) and moly (outer) targets, $I_p=0.8-0.9$ MA, ELM-free ?
- Study neutral, ion, impurity (Li, C, Mo) fluxes and particle balance as functions of
 - LITER rate (0-500 mg / shot)
 - NBI power (2-6 MW)
 - Steady-state ion density values ($n_d \sim 1-6 \times 10^{19} \text{ m}^{-3}$ by HFS+SGL)
 - Response of SOL and/or divertor density to source perturbation
 - Use SGL gas pulses to measure “pump-out” times


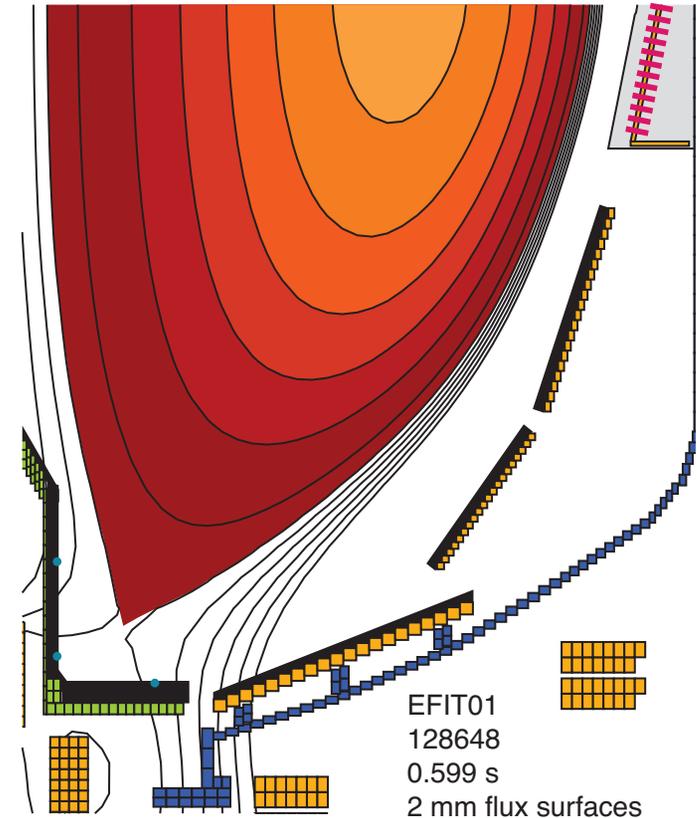


Diagnostic set well suited for divertor recycling and Li, C, Mo erosion measurements

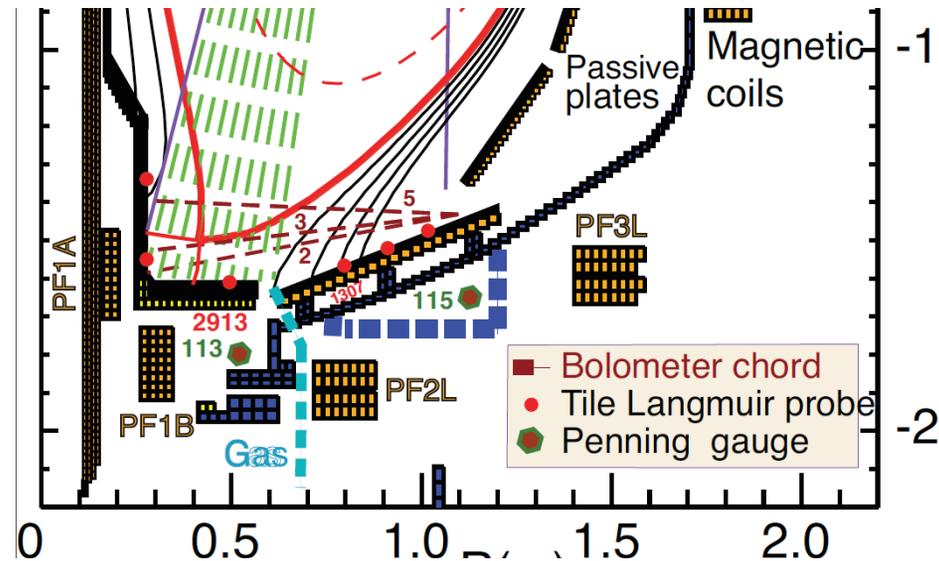


- Key diagnostics
 - D_α , lithium and carbon EIES and cameras for full poloidal coverage
 - Neutral pressure gauges
 - Langmuir probes
 - Divertor spectrometers for moly flux profiles
 - Core soft X-ray and VUV spectroscopy (SPRED, Lowes, Xeus)

Spectroscopic method to measure particle fluxes is well developed (e.g., Mo here, but applicable to recycling, Li and C fluxes)

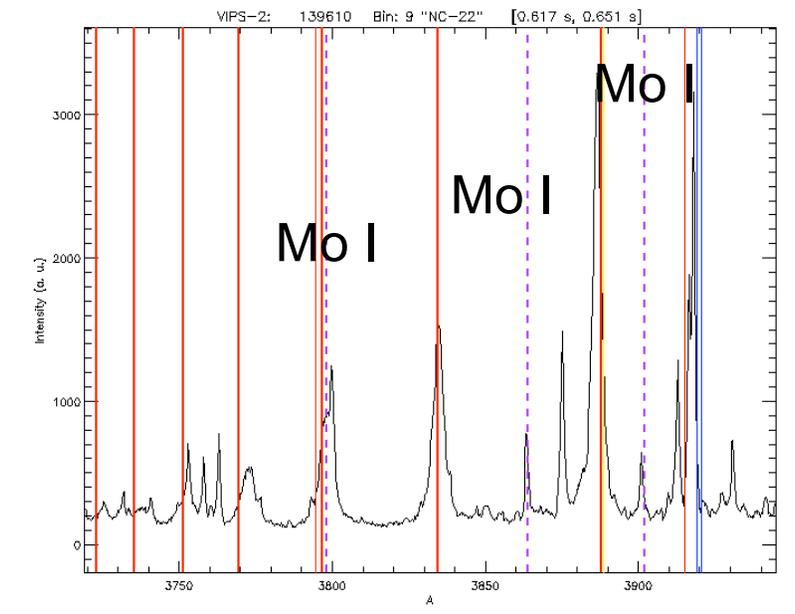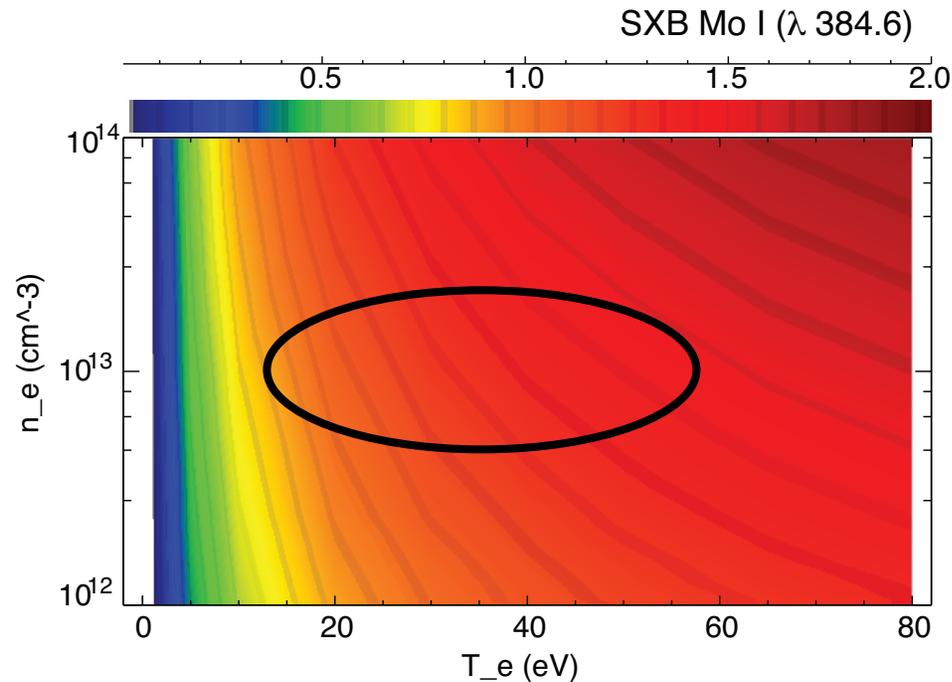


- Prominent Mo I spectral line triplet will be measured with DIMS and VIPS 2 spectrometers
- ADAS S/XB atomic factors will be used to convert spectroscopic measurements to Γ_{moly}
 - S/XB is a weak function of T_e and n_e

Molybdenum erosion can be significant due to self- and impurity sputtering

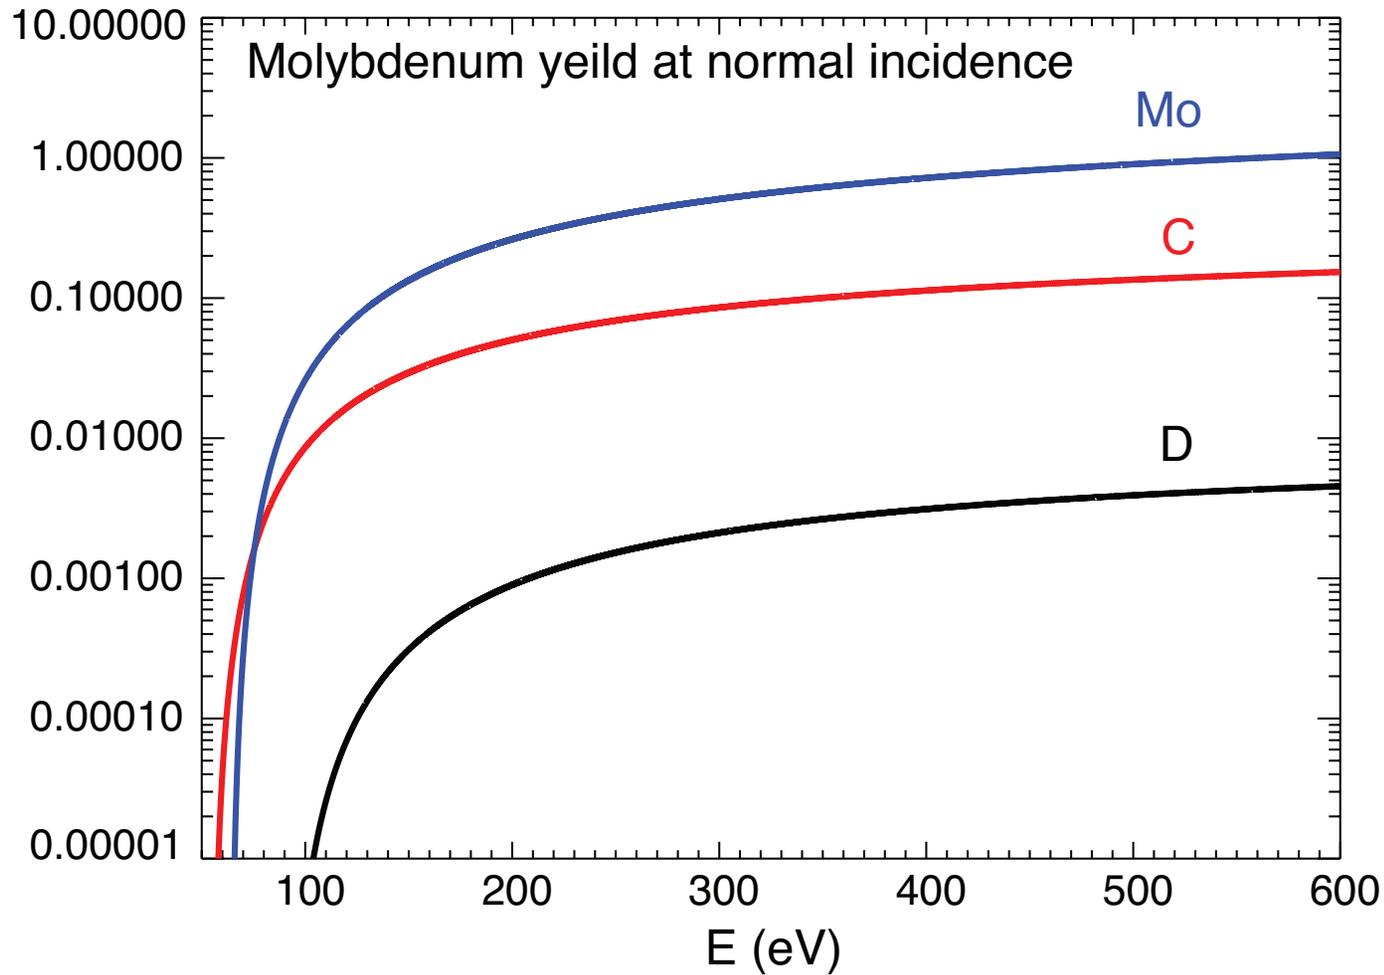

SGI singular gas pulses will be used to measure “pump-out” (edge “ τ_p^* ”)

- Measure dynamic SOL density response to singular flat-top SGI pulses (“pumpout”) at various Li temperatures, plasma densities
 - Use FIRETIP channel 7 ($R_{tang} \sim 150$ cm) at midplane (n_e)
 - Use divertor Langmuir probes (Γ_i, n_e)
 - Use neutral pressure gauges (Γ_n, n_0)
 - Example - Two shots compared
 - 14 mg/min Li evaporation, 10 min clock cycle
 - HFS at 700 Torr + SGI
- Lithium-coated graphite vs boronized graphite**
- Divertor D_α and Langmuir Probe I_{sat} correlated with SGI pulses, showed density pump-out

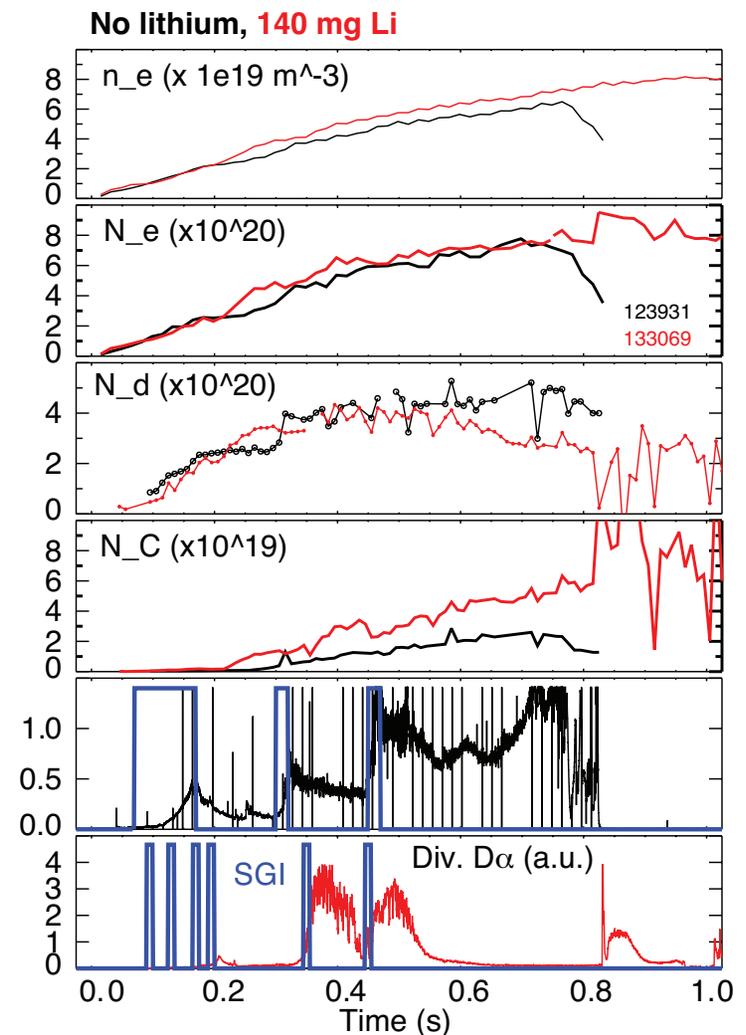

Shot plan

- Initial recycling, pumping and impurity influx studies will be done in XMP 71, XP 1133 and XP 1134
 - Important to document moly PFC with no or little lithium
 - Important to understand early vs. mid-campaign PSI
- In high- δ fiducial shape, $I_p=0.8-0.9$ MA
 - P_{SOL} scan (8 shots)
 - use 2, 4, 6 MW NBI, 100-200 mg Li, SGI diagnostic pulses
 - LITER / density scan (10-14 shots)
 - Use 50, 100-200, 300-400, 500 (?) mg Li
 - Run 2 shots per condition
 - One shot – with SGI diagnostic pulses, second shot – higher density / higher divertor ion flux with SGI
- In low- δ shape
 - Reduced scope LITER / density scan (≤ 10 shots)
 - Document detachment threshold in inner divertor