

# Improvements to CHI Start-up and Ramp-up in NSTX

**Thomas R Jarboe**

R. Raman, B.A. Nelson  
University of Washington

D. Mueller, M.G. Bell, B. LeBlanc, L. Roquemore,  
S. Gerhardt, H.W. Kugel  
Princeton Plasma Physics Laboratory

V. Soukhanovskii  
Lawrence Livermore National Laboratory  
*and the NSTX Research Team*

This work supported by U.S. DOE Contracts  
# DE-AC02-09CH11466 and DE-FG02-99ER54519 AM08

**51<sup>st</sup> Annual Meeting of the  
Division of Plasma Physics  
November 2-6, 2009  
Atlanta, Georgia**

College W&M  
Colorado Sch Mines  
Columbia U  
Comp-X  
General Atomics  
INEL  
Johns Hopkins U  
LANL  
LLNL  
Lodestar  
MIT  
Nova Photonics  
New York U  
Old Dominion U  
ORNL  
PPPL  
PSI  
Princeton U  
Purdue U  
SNL  
Think Tank, Inc.  
UC Davis  
UC Irvine  
UCLA  
UCSD  
U Colorado  
U Maryland  
U Rochester  
U Washington  
U Wisconsin

Culham Sci Ctr  
U St. Andrews  
York U  
Chubu U  
Fukui U  
Hiroshima U  
Hyogo U  
Kyoto U  
Kyushu U  
Kyushu Tokai U  
NIFS  
Niigata U  
U Tokyo  
JAEA  
Hebrew U  
Ioffe Inst  
RRC Kurchatov Inst  
TRINITI  
KBSI  
KAIST  
POSTECH  
ASIPP  
ENEA, Frascati  
CEA, Cadarache  
IPP, Jülich  
IPP, Garching  
ASCR, Czech Rep  
U Quebec 1




# Abstract

Experiments in NSTX have now demonstrated the savings of central solenoid inductive flux after coupling of toroidal plasmas produced by the technique of Coaxial Helicity Injection (CHI) to inductive sustainment and ramp-up of the toroidal plasma current. In these discharges, the central solenoid with zero pre-charge was used to apply an inductive loop voltage to the decaying CHI started discharges. The coupled discharges ramped up to 800kA without the benefit of auxiliary heating. Inductive flux savings was realized as a result of an effort to reduce the influx of low-Z impurities during the plasma start-up phase. This was achieved through the use of 400ms long CHI discharges produced using a DC rectifier power supply to ablate low-Z surface impurities from the lower divertor electrodes, followed by the use of Lithium evaporative coatings and an effort to reduce spurious arcs in the upper divertor region by controlling the extent of CHI plasma growth in the vessel. Previous work on NSTX has shown that CHI started discharges after coupling to neutral beam heated discharges can transition to an H-mode. These important new results from NSTX demonstrate that CHI is a viable solenoid-free plasma startup method for future STs and Tokamaks.

# Solenoid-Free Current Initiation would Improve the Prospect of the ST as a CTF and Fusion Reactor

- Could also aid Tokamak designs
  - Access lower aspect ratio configurations & reduce cost
- Of the three large tokamaks in the US, only NSTX is actively engaged in solenoid-free plasma startup research
- Transient Coaxial Helicity Injection plasma startup method developed on HIT-II at U-Washington
- NSTX has now demonstrated the savings of 200kA equivalent solenoid flux after coupling CHI started discharges to induction


# Transient CHI: Axisymmetric Reconnection Leads to Formation of Closed Flux Surfaces

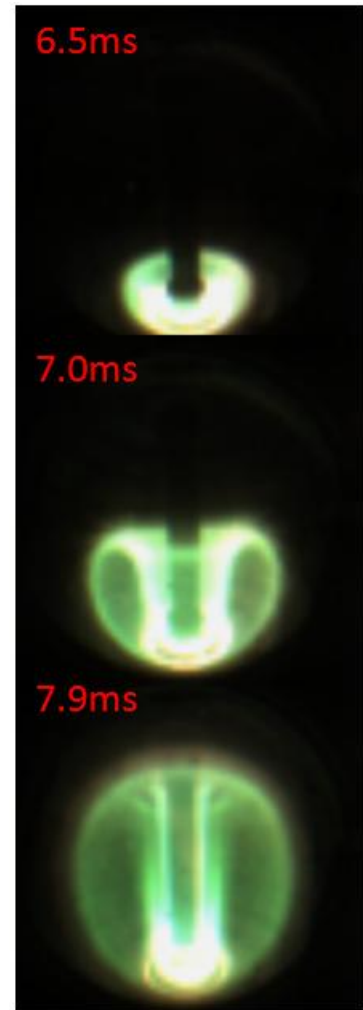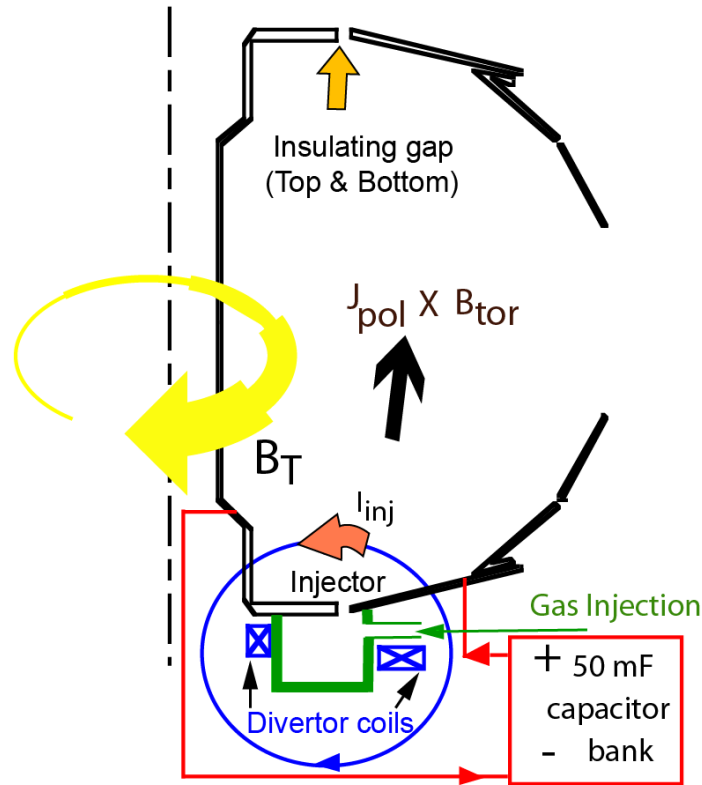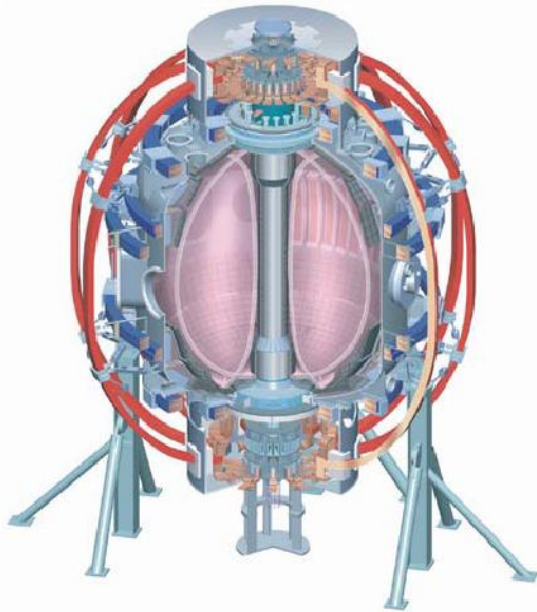

- Demonstration of closed flux current generation
  - Aided by gas and EC-Pre-ionization injection from below divertor plate region
- Demonstration of coupling to induction (2008)
  - Aided by staged capacitor bank capability


CHI for an ST: T.R. Jarboe, Fusion Technology, 15 (1989) 7  
 Transient CHI: R. Raman, T.R. Jarboe, B.A. Nelson, et al.,  
 PRL 90, (2003) 075005-1

# NSTX Plasma is ~30 x Plasma Volume of HIT-II

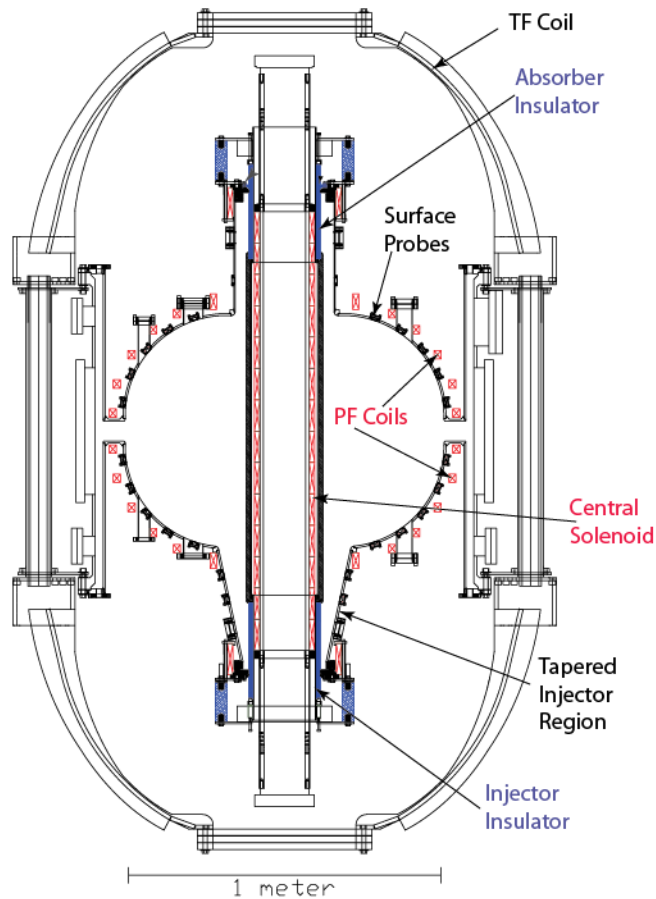

## Concept exploration device HIT-II

- Built for developing CHI
- Many Close fitting fast acting PF coils
- 4 kV CHI capacitor bank


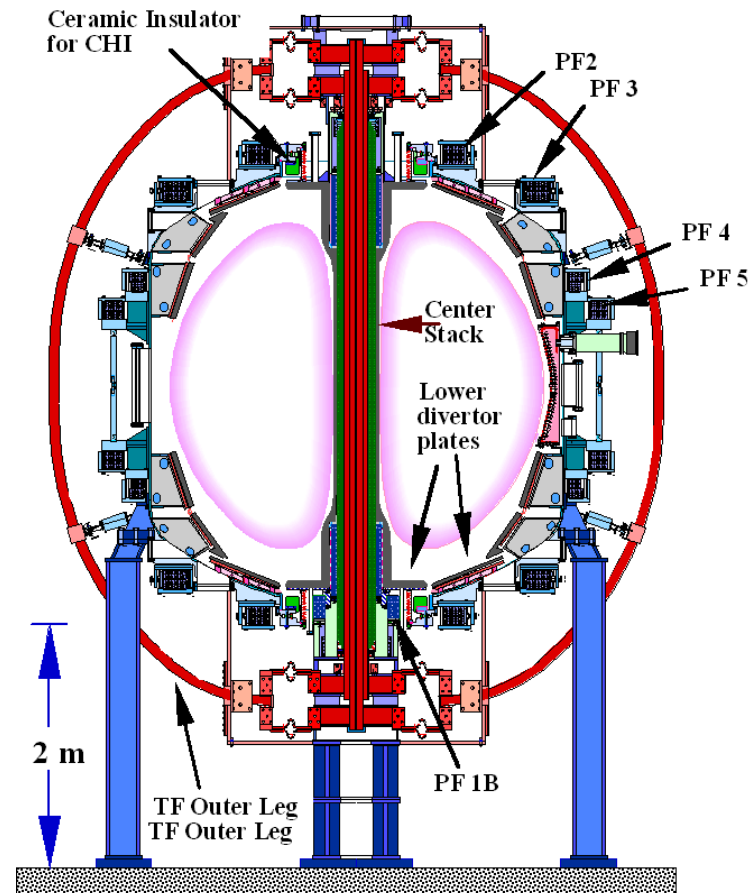


## Proof-of-Principle NSTX device

- Built with conventional tokamak components
- Few PF coils
- 1.7 kV CHI capacitor bank

# Very high current multiplication (~70) aided by higher Toroidal Flux

$$I_p = I_{inj}(\psi_{Tor} / \psi_{Injector})$$

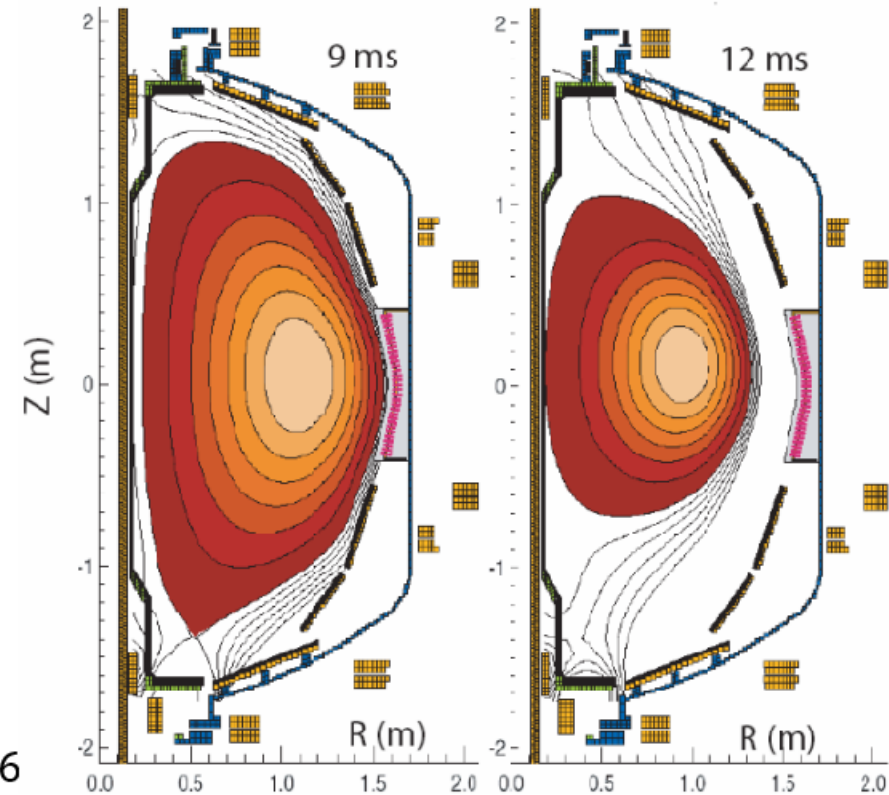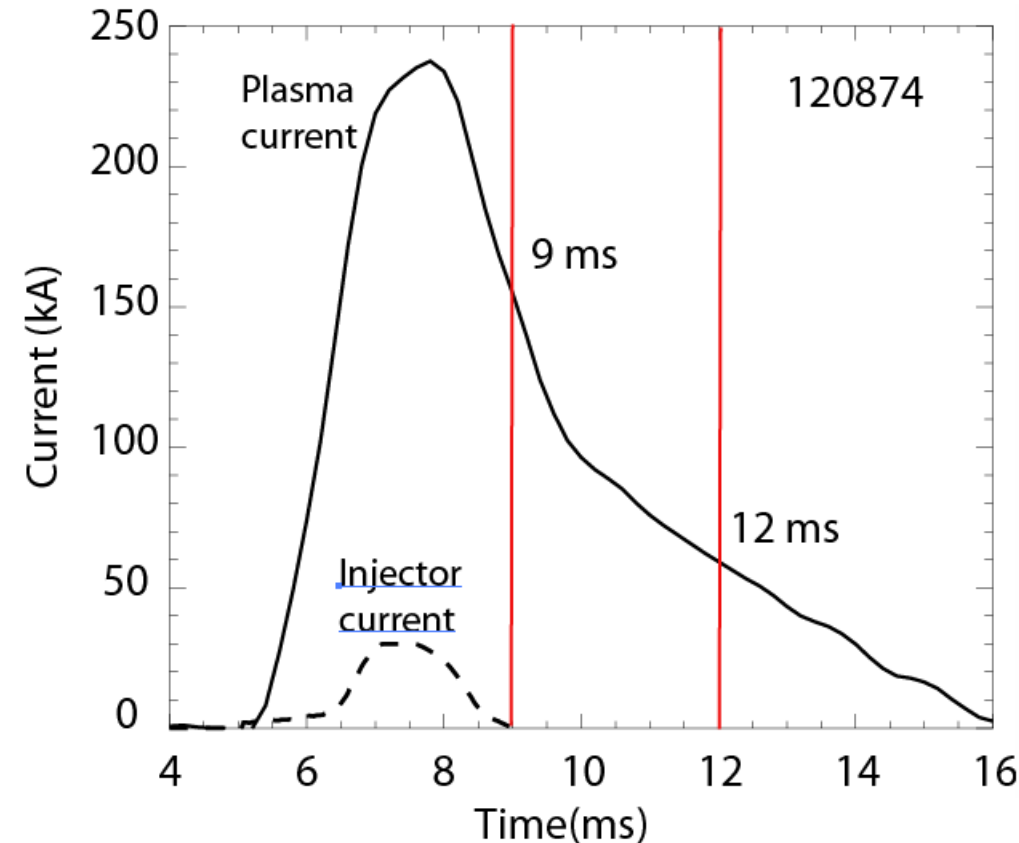



Record 160kA non-inductively generated closed flux current in ST or Tokamak produced in NSTX

Used LRDFIT reconstructions

LRDFIT (J. Menard)


# Current Multiplication in NSTX is ~10x than in HIT-II

## NSTX

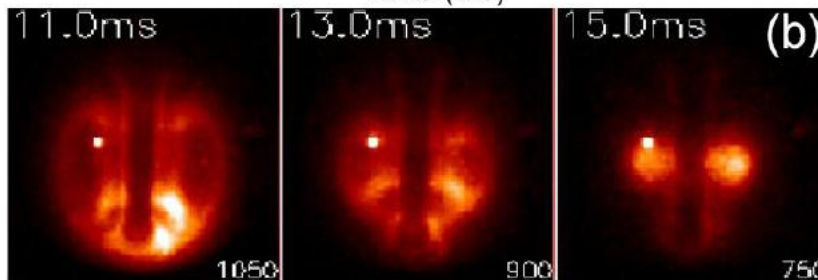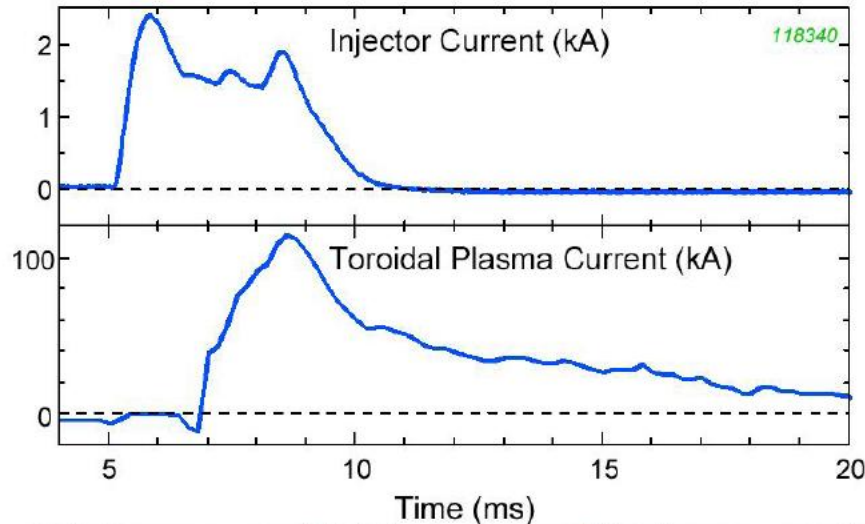

$I_{inj} \sim 1.5$  kA generates  $I_p \sim 100$  kA  
 - due to Higher Toroidal Flux in NSTX


## HIT-II

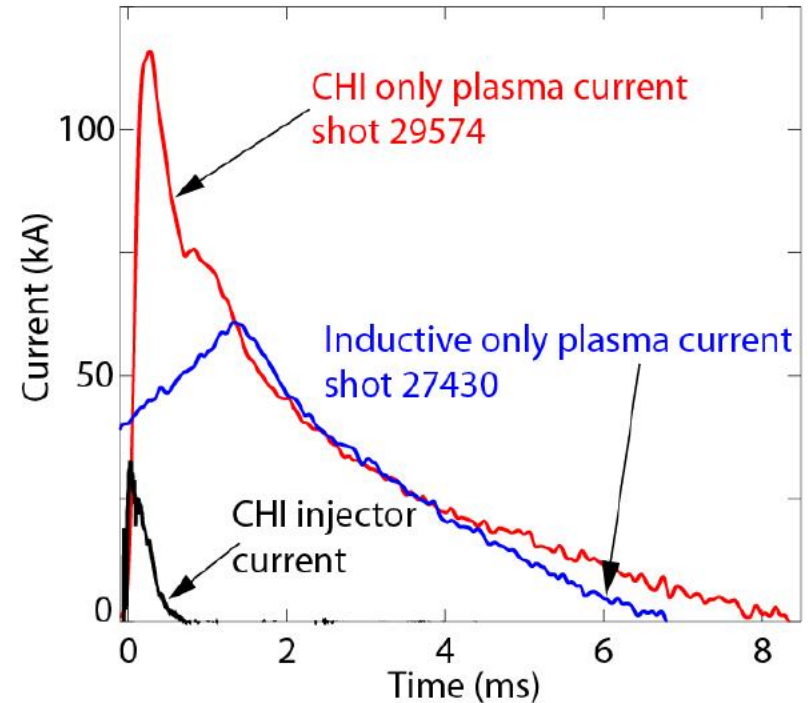

$I_{inj} \sim 30$  kA generates  $I_p \sim 120$  kA  
 Best current multiplication is ~6-7

R. Raman, T.R. Jarboe, R.G. O'Neill, et al., NF 45 (2005) L15-L19  
 R. Raman, B.A. Nelson, D. Mueller, et al., PRL 97 (2006) 17002


# Externally Produced Toroidal Field Makes CHI Much More Efficient in a ST (Compared to Spheromak)

- Bubble burst current\*:  $I_{inj} = 2\psi_{inj}^2 / (\mu_o^2 d^2 I_{TF})$ 
    - $\psi_{inj}$  = injector flux
    - $d$  = flux foot print width
    - $I_{TF}$  = current in TF coil (Advantage of TF and ST contribution to CTs)
  - **Current Multiplication can be very large!**  $I_P = I_{inj} (\psi_{Tor} / \psi_{Pol})$ 
    - HIT-II: Current multiplication factor ~6
    - NSTX:  $I_{inj} \sim 1.5\text{kA}$  generates  $I_P \sim 120\text{kA}$  (~60-70)
      - As the magnitude of the toroidal field increases:**
      - **Less injector current is needed for a given injector flux**
      - **Current multiplication factor improves**
-  **Favorable scaling with machine size**

\* T.R. Jarboe, *Fusion Tech.* 15, 7 (1989)



# Inductively Coupled Current Ramps-up After Input Power Exceeds Radiated Power

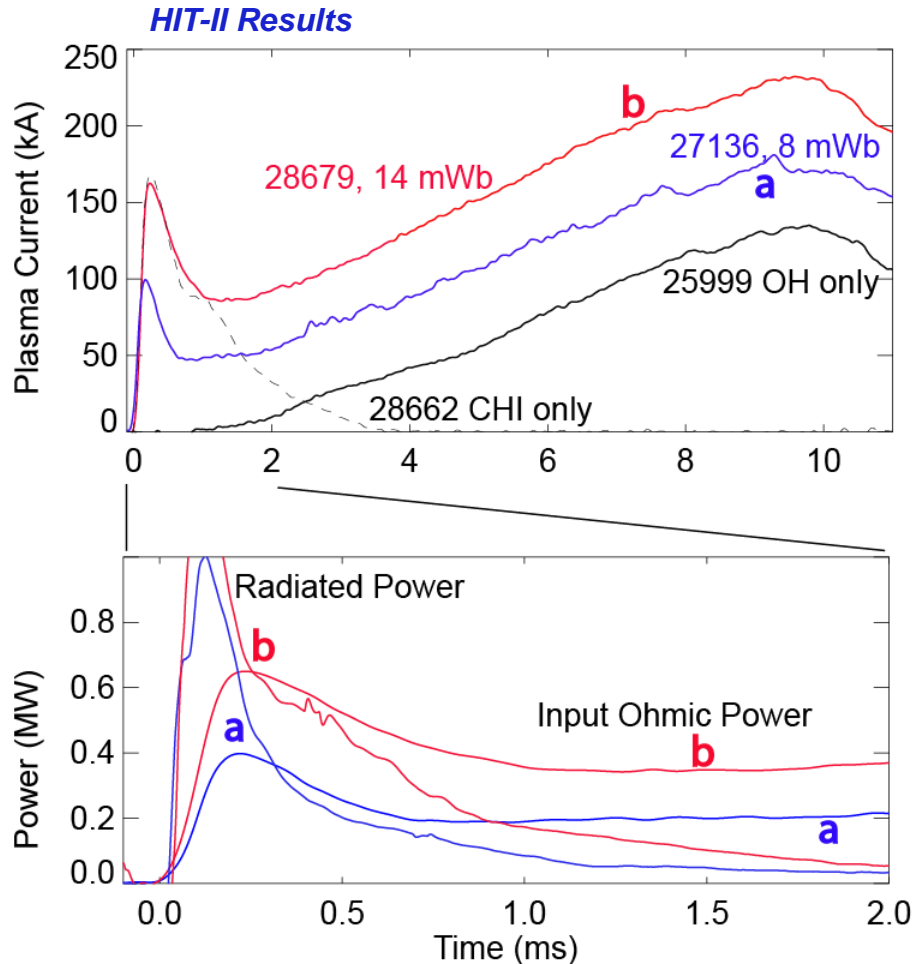


- Identical loop voltage programming for all cases
- Coupling current increases as injector flux is increased
- Radiated power can be decreased by using W or Mo target plates
  - Start-up plasma (inductive or CHI) is cold (few 10s of eV)
    - Reduce Low-z line radiation
  - Auxiliary heating would ease requirements on current ramp-up system

R. Raman, T.R. Jarboe, R.G. O'Neill, et al., NF 45 (2005) L15-L19



R. Raman, T.R. Jarboe, W.T. Hamp, et al., PoP 14 (2007) 022504

# Low-z Impurity Radiation Should be Reduced for Inductive Coupling

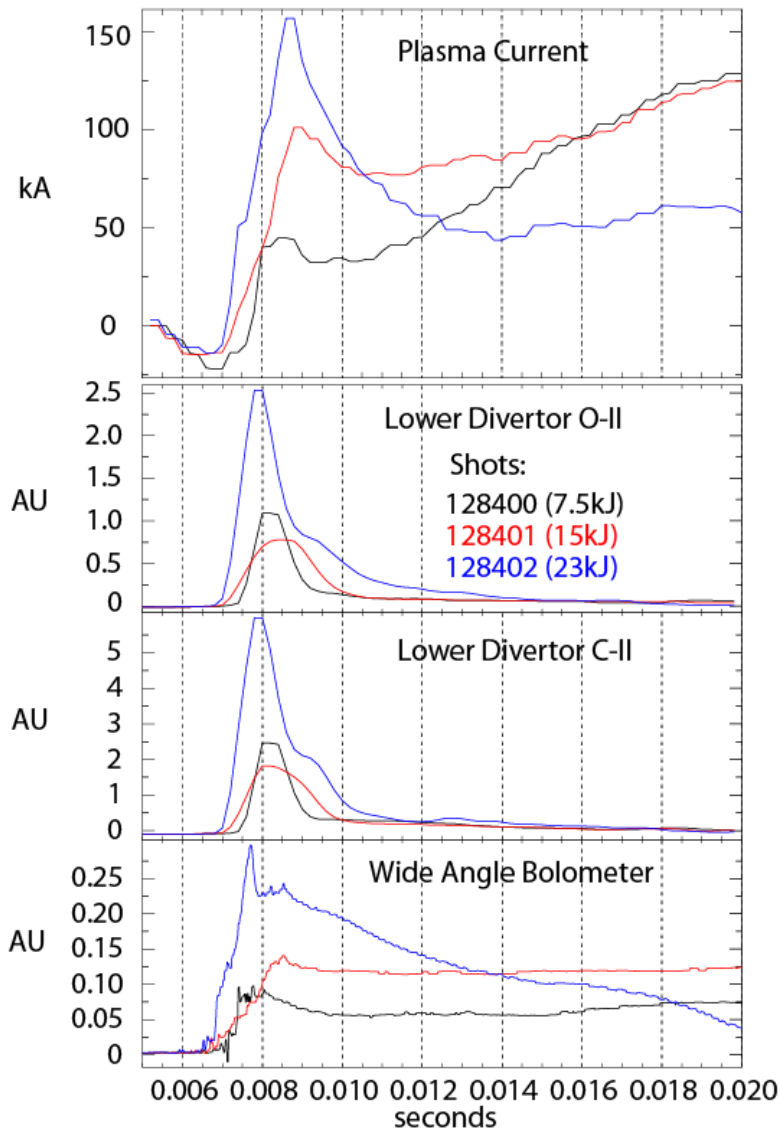

- Low-z impurity radiation increases with more capacitors
- Possible improvements
  - Test CHI in NSTX with partial metal outer divertor plates as part of liquid Li divertor upgrades
    - High Te in spheromaks (500eV) obtained with metal electrodes
  - Discharge clean divertor with high current DC power supply
  - Use ~350kW ECH to heat CHI started plasma

# CHI started discharge couples to induction and transitions to an H-mode demonstrating compatibility with high-performance plasma operation

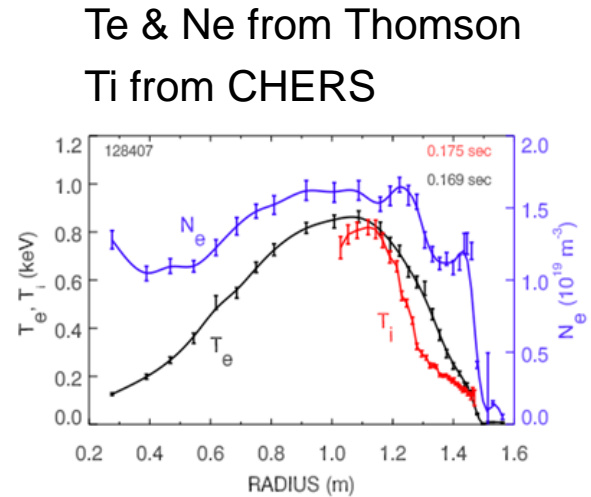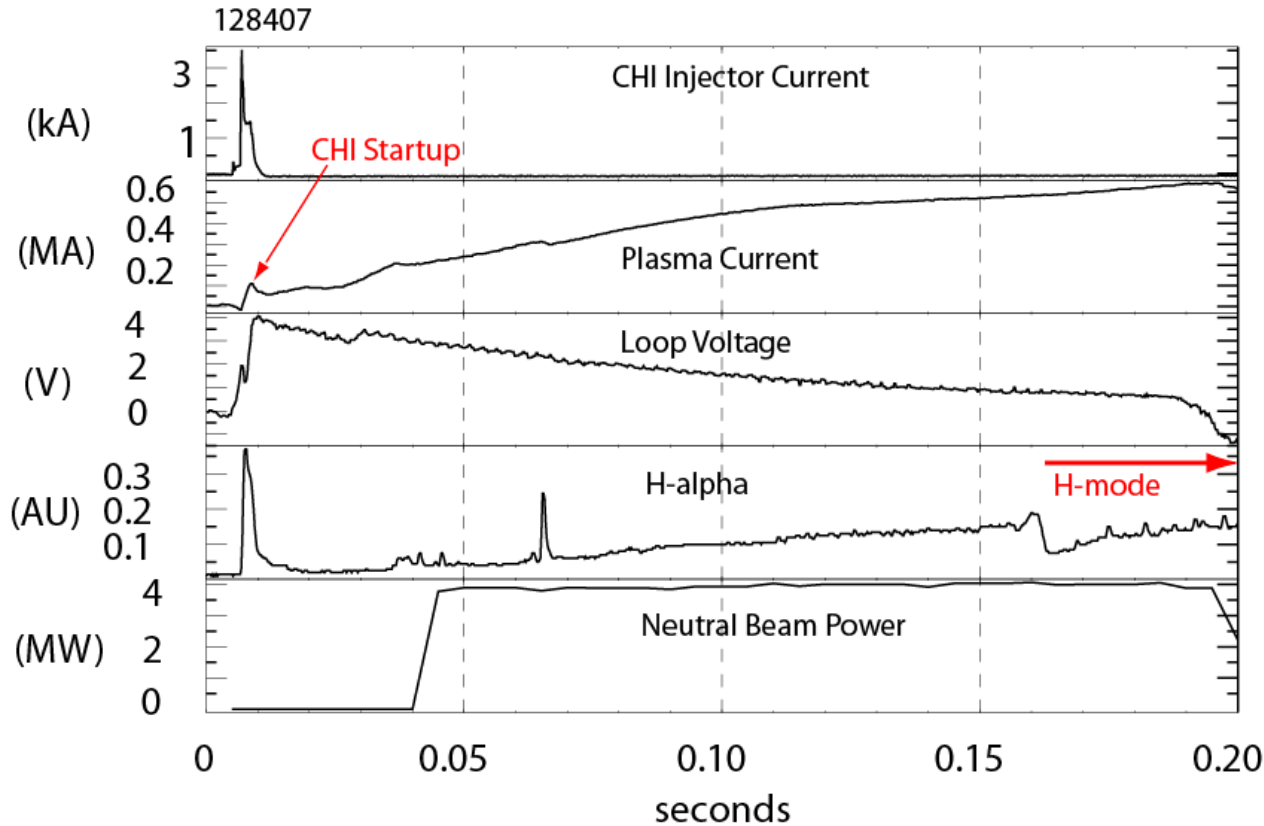

- Projected plasma current for CTF >2.5 MA

$$[I_p = I_{inj}(\psi_{\text{Tor}}/\psi_{\text{Inj}})]^*$$


- Based on 50 kA injector current (250kA equivalent achieved on HIT-II)
- Current multiplication of 50 (70 achieved in NSTX)

- Discharge is under full plasma equilibrium position control
  - Loop voltage is preprogrammed

CHERS: R. Bell  
Thomson: B. LeBlanc

\*T.R. Jarboe, Fusion Technology, 15 (1989) 7

# Flux Savings on NSTX Now Realized After Low-Z Impurity Reduction

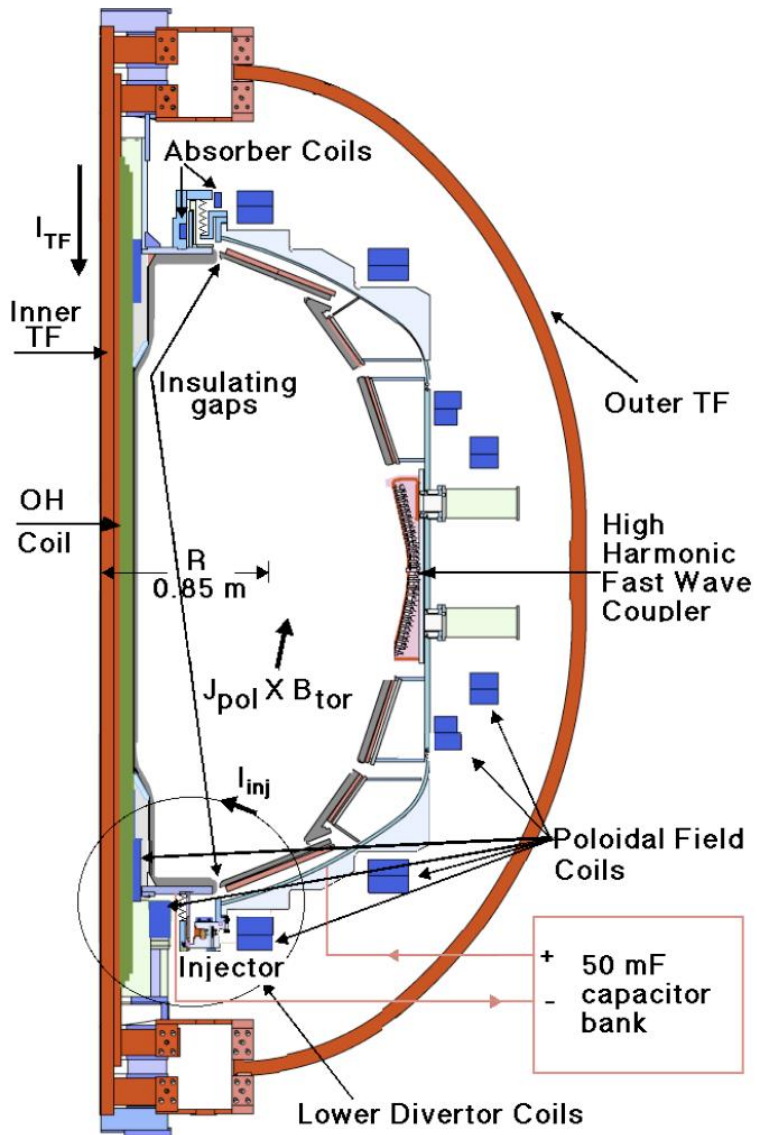



Long-pulse (400ms) CHI discharges in a 'stuffed-injector' current mode used to ablate Low-Z impurities from lower divertor

Deuterium Glow Discharge cleaning employed to chemically sputter and reduce oxygen levels



A buffer field was provided using new PF coils located in the upper divertor region (Absorber region) to reduce interaction of CHI discharge with un-conditioned upper divertor plates

Lithium evaporation on lower divertor plates improved discharge performance

# Absorber PF Coils Have Reduced Influx of Oxygen Impurities From Upper Divertor

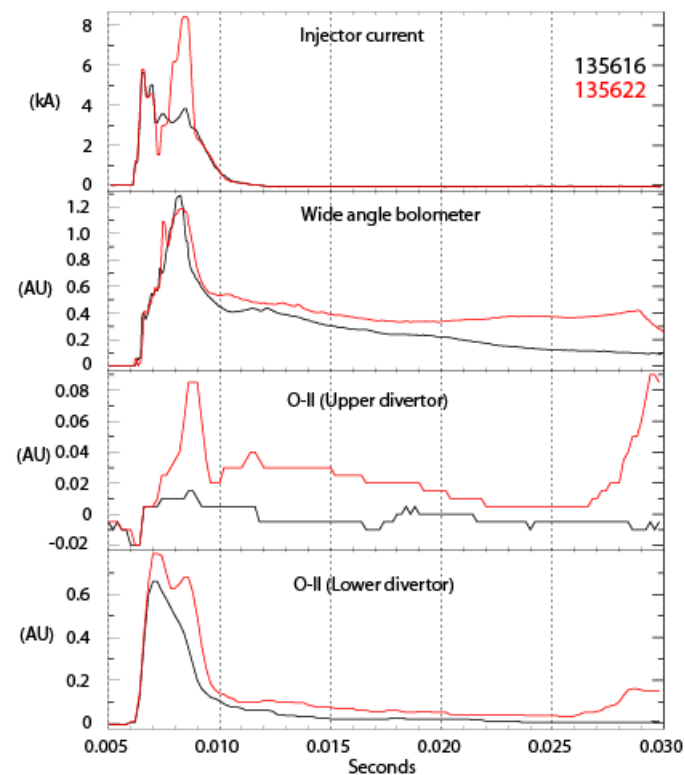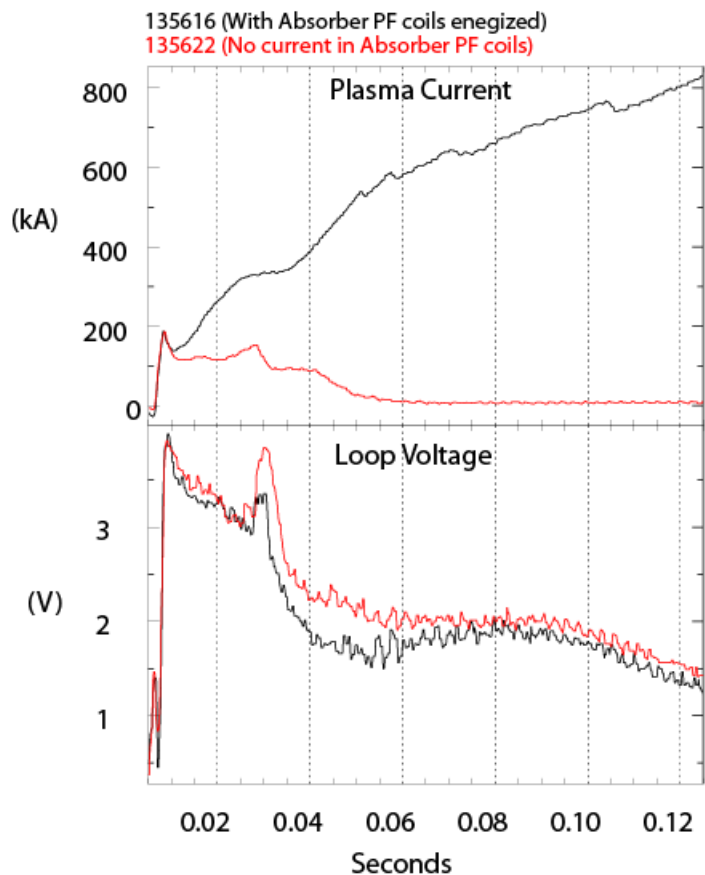


# Avoidance of Absorber Arc Clearly Seen in Fast Camera Images

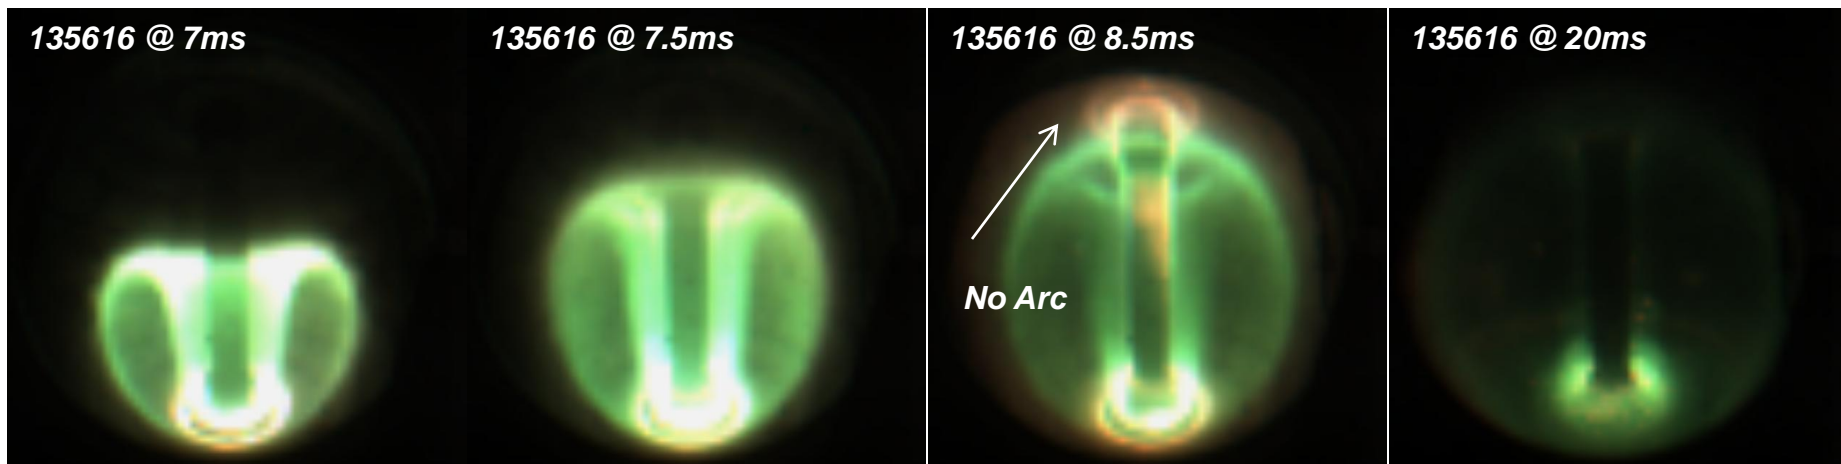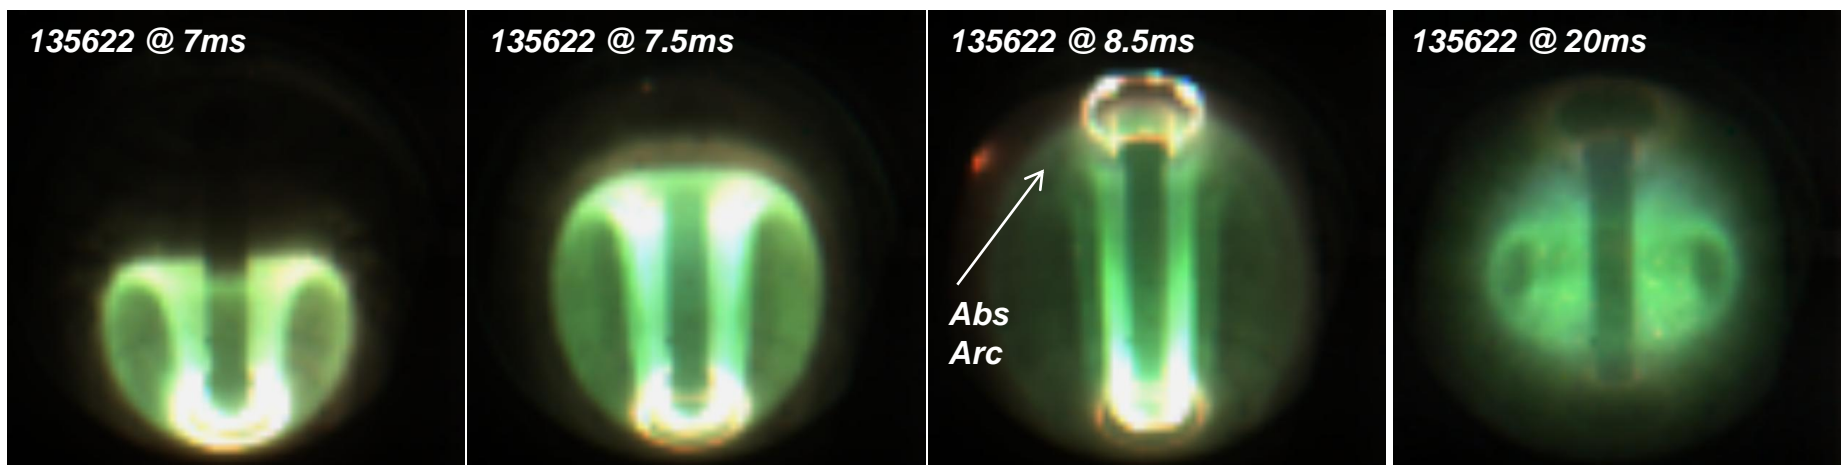


- Discharge with Absorber Arc (135622) shrinks in size after coupling to induction
- Discharge without Absorber Arc heats-up and visible emission decreases






# Using Only 25kJ of Capacitor Bank Energy 300kA of CHI Started Discharge Generated and Coupled to Induction

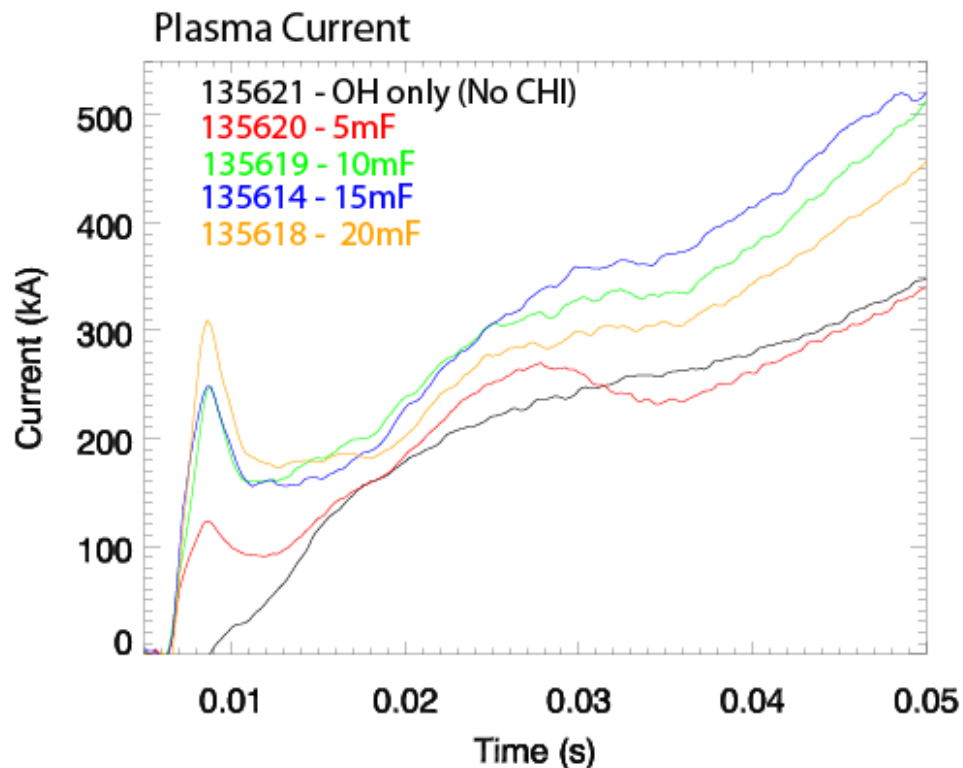

- All discharges used 0.11Vs of Central Solenoid Flux
- $T_e$  and  $n_e$ , both are higher in CHI-started discharge
- Discharges with 3-capacitors (20kJ) reaches 525kA
  - 200kA higher than induction-only discharge
  - Induction-only discharge reaches only 325kA

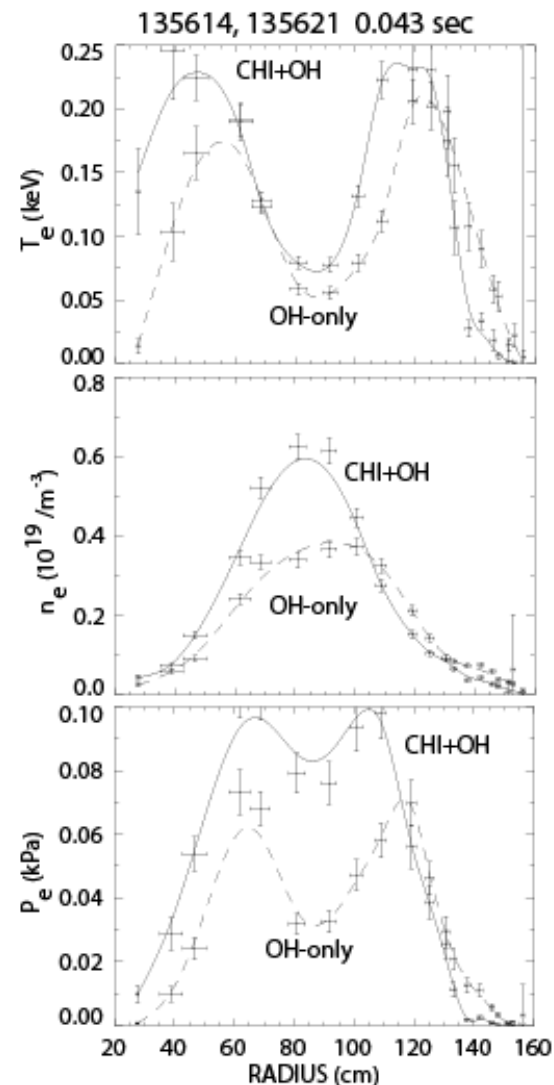


# Weak Absorber Arc During Operation with 20mF Capacitor Responsible for Reduced Coupling to Induction

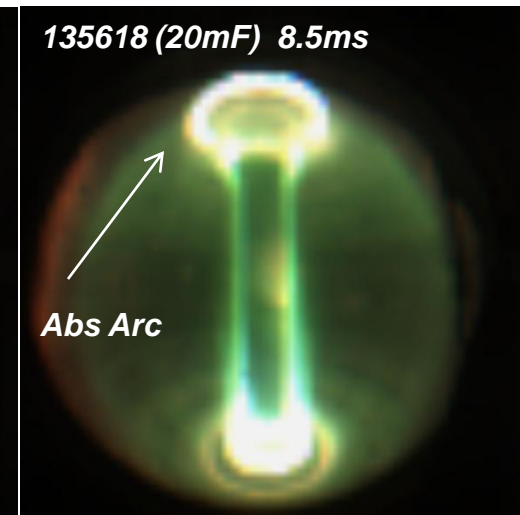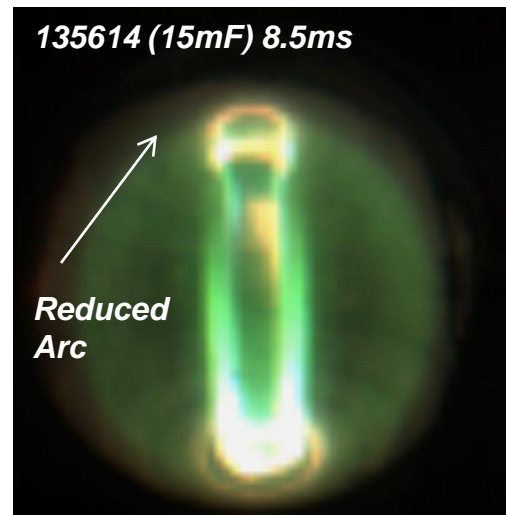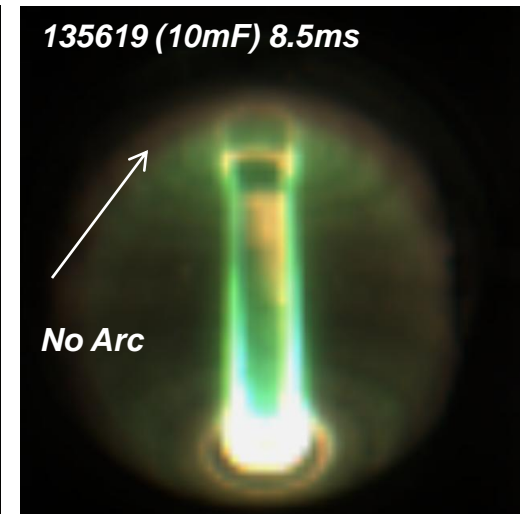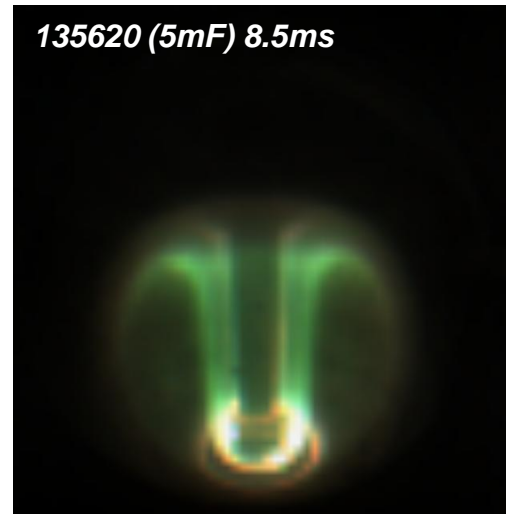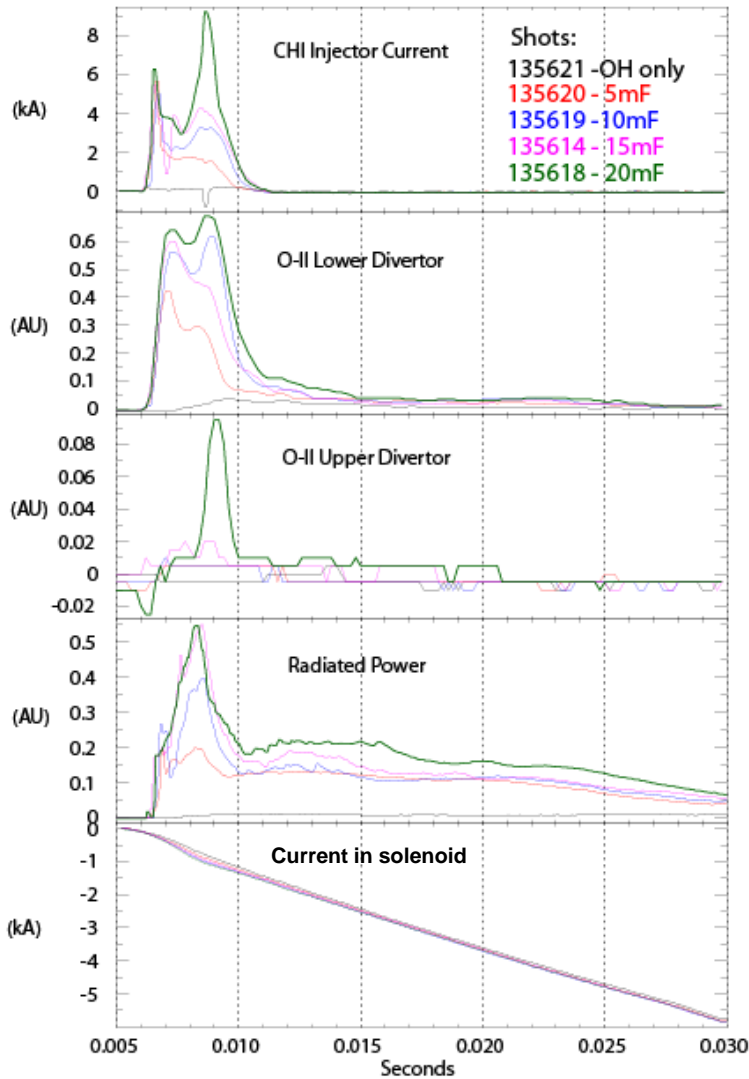



# For the First Time in NSTX CHI Discharges up to 50eV Electron Temperatures Measured by Thomson Scattering

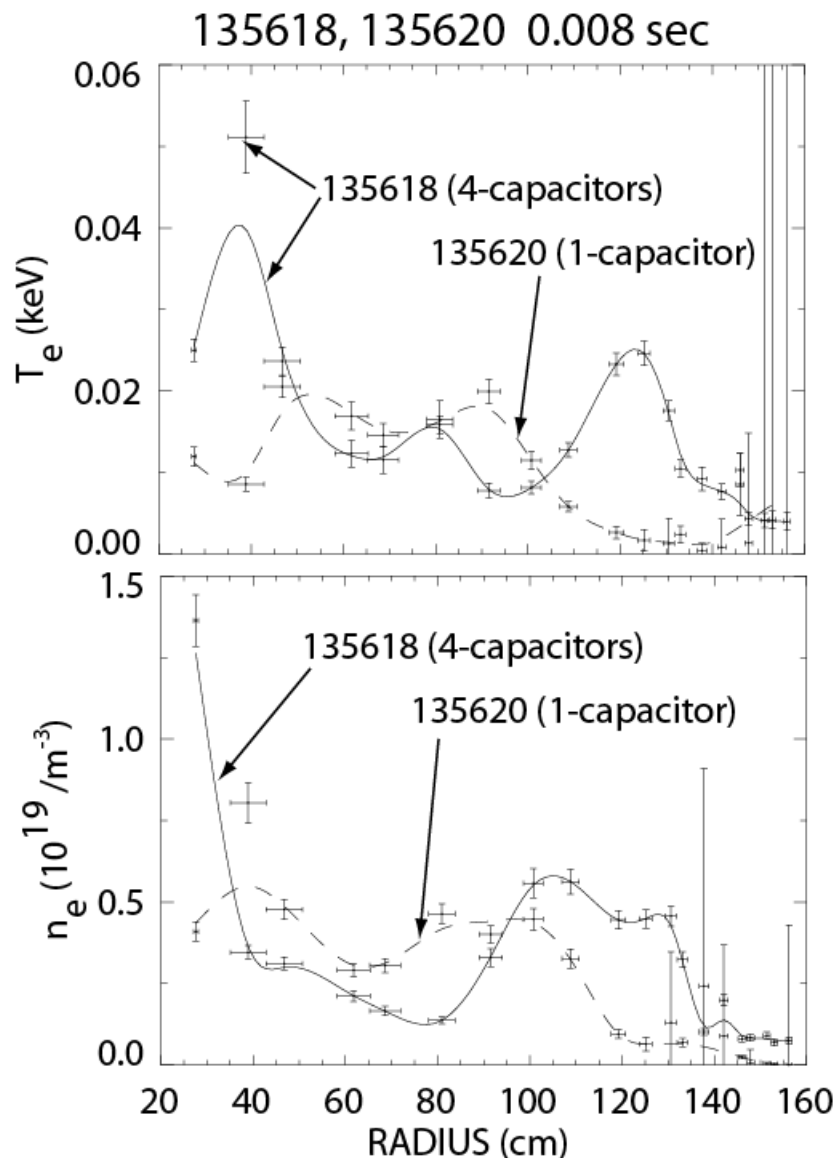

- Now for the First Time in NSTX CHI discharges the electron temperature is seen to increase with increasing capacitor bank energy
- This indicates burn-through of oxygen impurities (due to reduction in oxygen levels)
- At temperatures  $>20\text{eV}$ , flux savings should be realized and this is now seen in NSTX CHI started discharges

# NSTX has Demonstrated a Viable Solenoid-Free Plasma Startup Method for the ST

- Demonstration of the process in a vessel volume thirty times larger than HIT-II on a size scale more comparable to a reactor
  - Remarkable multiplication factor of 70 between the injected current and the achieved toroidal current, compared to six in previous experiments
  - Results were obtained on a machine designed with mainly conventional components and systems
  - Favorable scaling with increasing machine size
- 1) 0.3MA current generation in NSTX validates capability of CHI for high current generation in ST
  - 2) Successful coupling of CHI started discharges to inductive ramp-up & transition to an H-mode demonstrates compatibility with high-performance plasma operation