

Supported by



Office of
Science



Robustness of improved error field suppression in long-pulse discharges

*College W&M
Colorado Sch Mines
Columbia U
Comp-X
FIU
General Atomics
INL
Johns Hopkins U
LANL
LLNL
Lodestar
MIT
Nova Photonics
New York U
Old Dominion U
ORNL
PPPL
PSI
Princeton U
SNL
Think Tank, Inc.
UC Davis
UC Irvine
UCLA
UCSD
U Colorado
U Maryland
U Rochester
U Washington
U Wisconsin*

Jon Menard, PPPL

**Advanced Scenarios and Control TSG
Final Review**

Princeton Plasma Physics Laboratory

March 21, 2008

*Culham Sci Ctr
U St. Andrews
York U
Chubu U
Fukui U
Hiroshima U
Hyogo U
Kyoto U
Kyushu U
Kyushu Tokai U
NIFS
Niigata U
U Tokyo
JAEA
Hebrew U
Ioffe Inst
RRC Kurchatov Inst
TRINITI
KBSI
KAIST
POSTECH
ENEA, Frascati
CEA, Cadarache
IPP, Jülich
IPP, Garching
IPP AS CR
U Quebec*


In 2007, using optimized B_p sensors in control system allowed feedback to provide most/all $n=1$ error field correction at high β



- Previous $n=1$ EF correction required a priori estimate of intrinsic EF
- Additional sensors \rightarrow detect modes with RWM helicity \rightarrow increased signal to noise
- Improved detection \rightarrow higher gain \rightarrow **EF correction using only feedback on RFA**


EFC algorithm developed in FY07:

- Use time with minimal intrinsic EF and RWM stabilized by rotation
- Intrinsic Ω_ϕ collapse absent in 2007 \rightarrow **purposely apply $n=1$ EF to reduce rotation, destabilize RWM**
- Find corrective feedback phase that reduces applied EF currents
- Increase gain until applied EF currents are nearly completely nulled and plasma stability restored
- **Then turn off applied error field (!)**

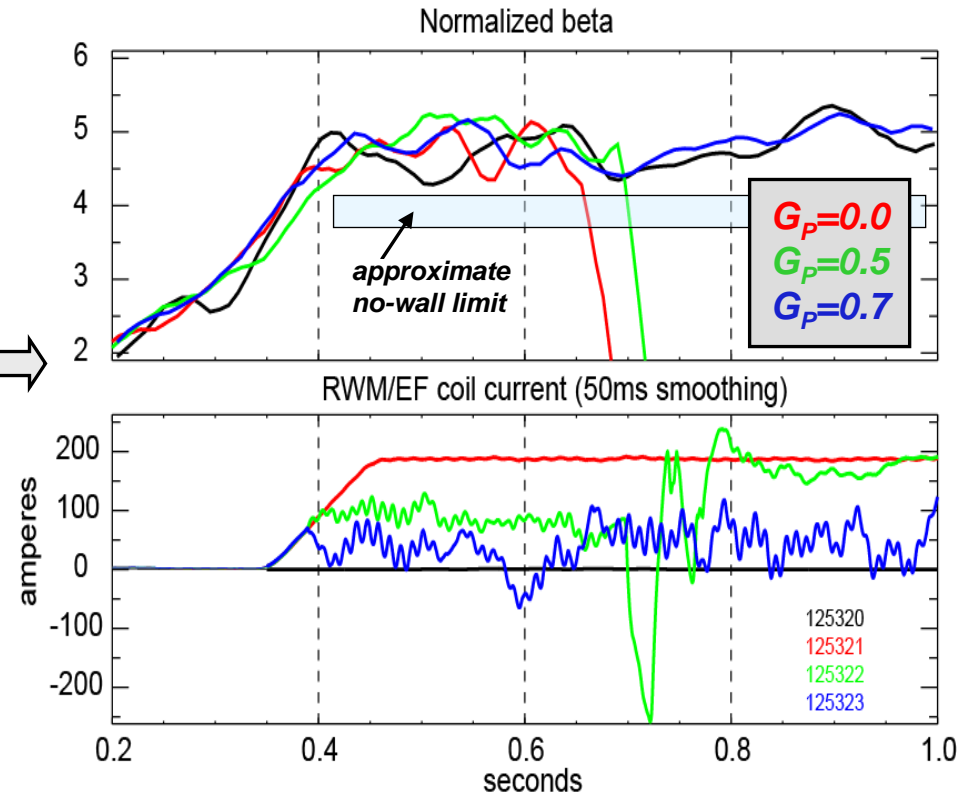

\rightarrow Use same gain/phase settings to suppress RFA from intrinsic EF and any unstable RWMs

High gain, phase difference $\delta=270^\circ$ between measured U/L avg B_p & applied B_R optimal \rightarrow can we optimize control further?

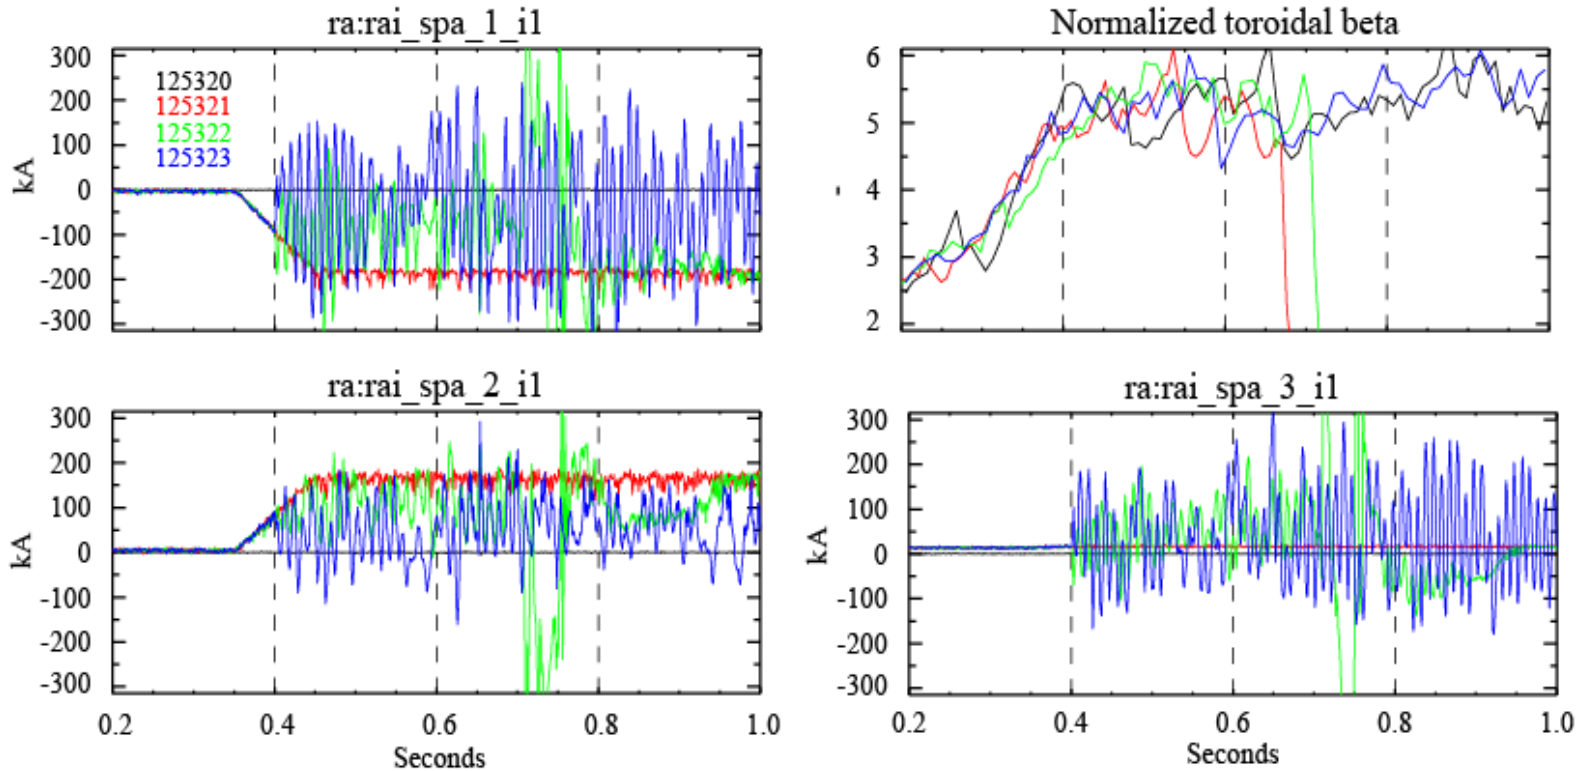


- Higher gain beneficial for improved RFA suppression – $G_p \gg 1$ possible?
 - Goal - Factor of 2 gain increase w/o loss of controller stability
- Significant increase in AC control power evident at higher gain
- More optimal controller? - LPF at SPA request to reduce noise...?

Outboard Ω_ϕ changes by 30-40% with n=3 polarity flip



- Optimal n=3 current magnitude = 300-400A
- Coil shape data indicates VF coil (PF5) produces some n=3 EF
 - Need to assess if PF5 EF is consistent with empirical correction below

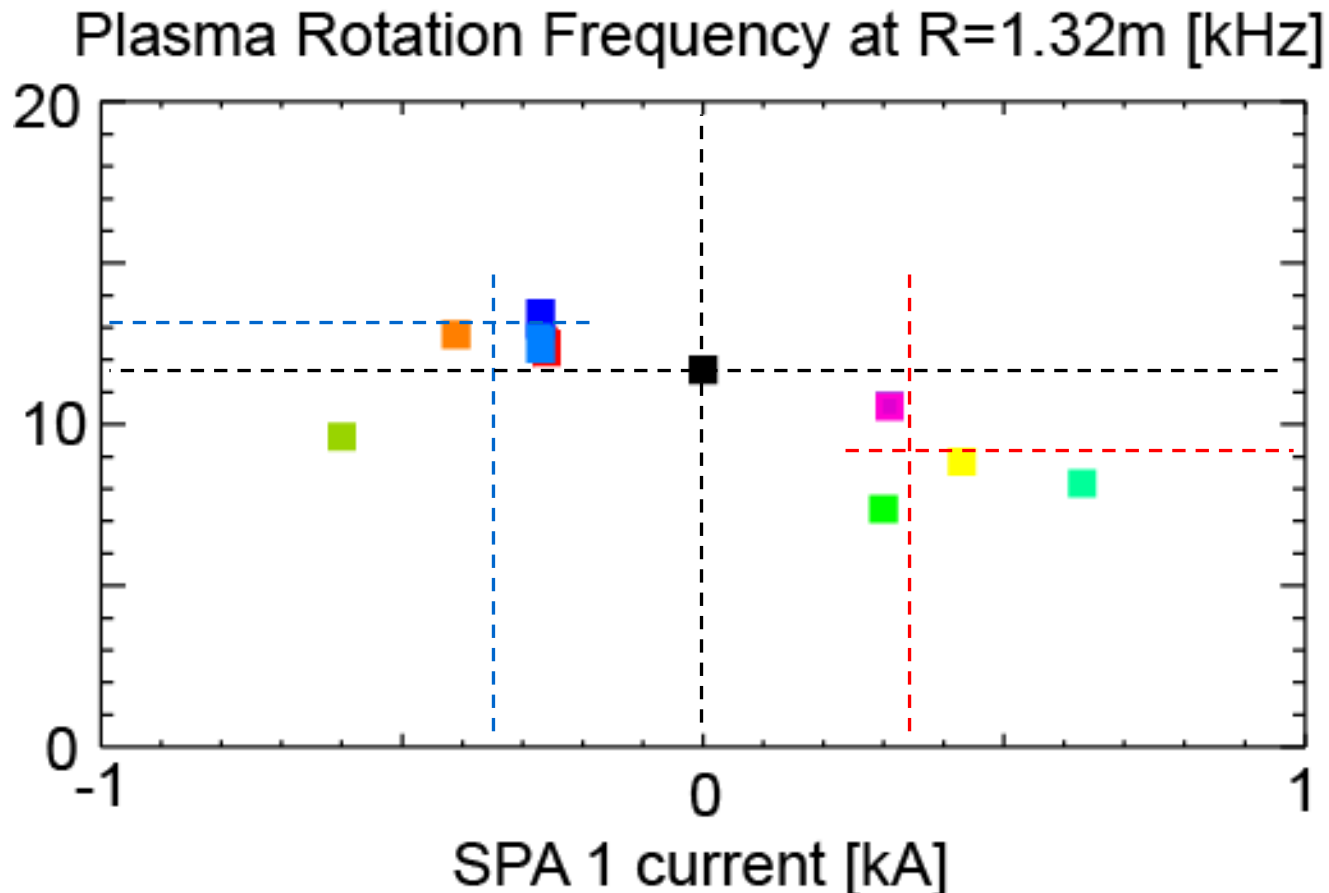


Simultaneous multiple-n correction improves performance


(Optimized feedback control of n=1 B_p RFA + pre-programmed n=3 correction)



- Record pulse-length at I_p=900kA, with sustained high-β
- Long period free of core low-f MHD activity
- Plasma rotation sustained over same period
 - Core rotation decreases with increasing density (f_{GW} → 0.75), but...
 - R > 1.2m rotation slowly **increases** until large ELM at t=1.1s

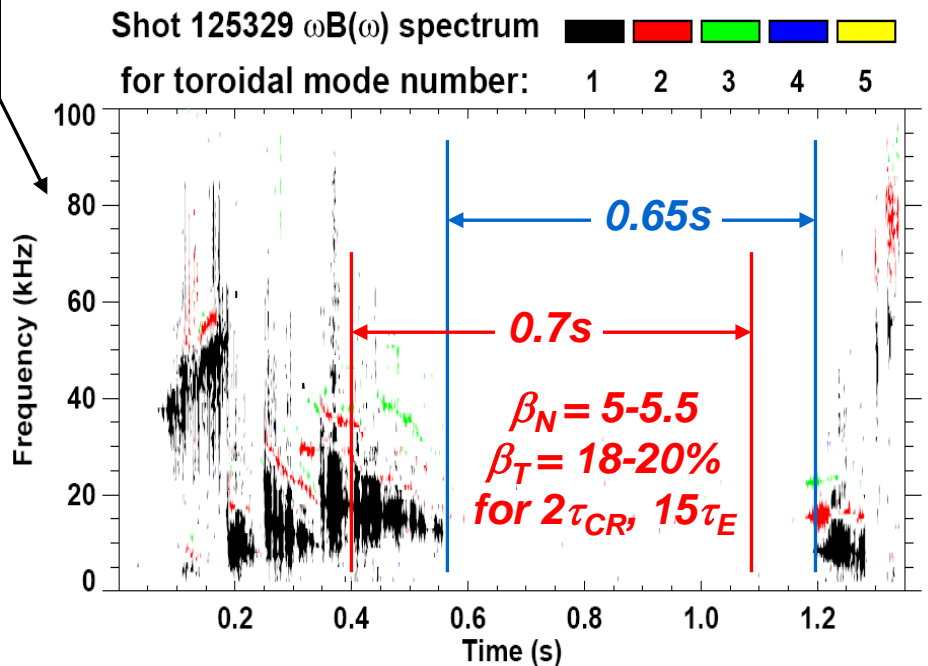

For reference: $\tau_{CR} \approx 0.3s$, $\tau_E = 40-50ms$

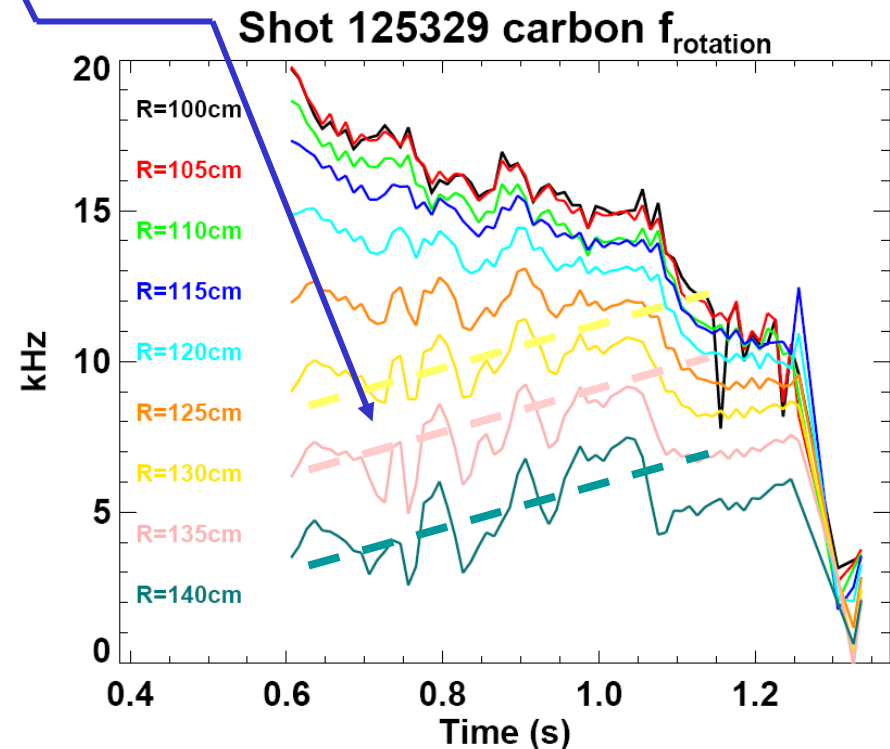

Goal: Extend optimal EFC to wider range of scenarios and I_p

Methodology/shot plan:



Day 1 **Determine optimal $n=3$ EFC gain relative to I_{PF5} and/or I_p**

- Re-verify existence of $n=3$ EF in $I_p=900\text{kA}$ reference discharge
 - Test $I_{n=3}/I_p = -0.3, 0, 0.3$ kA/MA (from 2007 data) (6 shots)
- Optimize $n=3$ EFC for two new plasma currents: 700kA and 1.2MA
 - Assume $I_{n=3}/I_p = 0.3$ kA/MA and multiply by: 0, 1, -1, 2, 1.5, 0.5 (12 shots)

Test combined $n=3$ EFC + $n=1$ RFA suppression for $I_p=0.7, 0.9, 1.2\text{MA}$

- Add $n=1$ feedback – 2 shots for each I_p – use optimal 2007 gain & phase (6 shots)

Day 2 **Optimize $n=1$ RFA suppression controller**

- Reproduce 2007 900kA reference shots which used externally applied $n=1$ error field to trigger rotation collapse and disruption (3 shots)
- Scan RWM control proportional gain until feedback system is unstable (4 shots)
 - Add LPF to control coil currents as necessary to avoid very large SPA currents
- With gain at highest stable value, increase τ_{LPF} from 0 to:
 - 1ms, 3ms, 10ms, 30ms, 100ms (2 shots for each τ_{LPF}) (10 shots)
- For τ_{LPF} where AC RMS control power is reduced by factor 2-4, increase gain again and determine highest stable value (4 shots)
- Test controller for two new plasma currents: 700kA and 1.2MA (4 shots)