


The NSTX beam emission spectroscopy (BES) diagnostic system: capabilities and research plan

David R. Smith, R. J. Fonck, G. R. McKee,
N. Schoenbeck, I. Uzun-Kaymak (*UW-Madison*),
and B. C. Stratton (*PPPL*)

2010 U.S. Transport Taskforce Workshop
Annapolis, MD
April 13-16, 2010

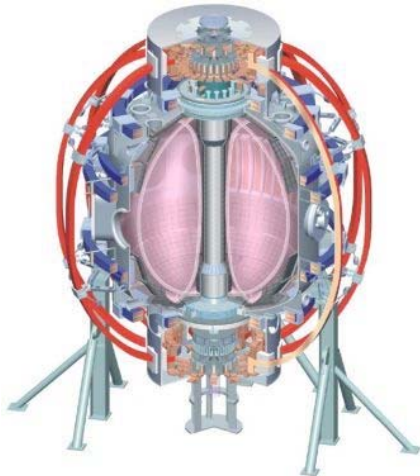


College W&M
Colorado Sch Mines
Columbia U
CompX
General Atomics
INEL
Johns Hopkins U
LANL
LLNL
Lodestar
MIT
Nova Photonics
New York U
Old Dominion U
ORNL
PPPL
PSI
Princeton U
Purdue U
SNL
Think Tank, Inc.
UC Davis
UC Irvine
UCLA
UCSD
U Colorado
U Illinois
U Maryland
U Rochester
U Washington
U Wisconsin

Culham Sci Ctr
U St. Andrews
York U
Chubu U
Fukui U
Hiroshima U
Hyogo U
Kyoto U
Kyushu U
Kyushu Tokai U
NIFS
Niigata U
U Tokyo
JAEA
Hebrew U
Ioffe Inst
RRC Kurchatov Inst
TRINITY
KBSI
KAIST
POSTECH
ASIPP
ENEA, Frascati
CEA, Cadarache
IPP, Jülich
IPP, Garching
ASCR, Czech Rep
U Quebec

Outline




- Motivation
- BES measurement principles
- Optical design
 - Viewing geometry
 - Collection optics
 - Aperture plate
 - Fiber bundles & spot sizes
 - Interference filters
- Detection system design
 - Photodiode & FET preamplifier
 - Photon noise & e-noise
 - Digitizer with true 2 MHz sampling
- Status & plans
- Summary

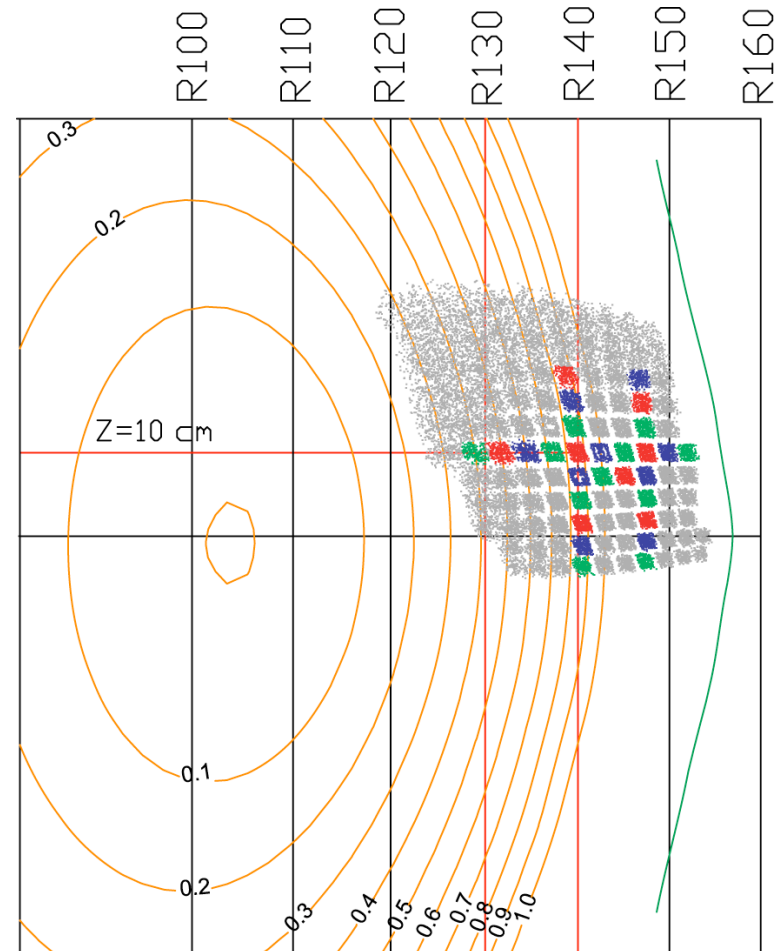

Beam emission spectroscopy (BES) is a diagnostic technique for measuring ion gyroscale ($k_{\perp} \rho_i < 1$) density fluctuations

- Measured & derived quantities

- Fluctuation amplitudes
- Frequency spectra
- Radial and poloidal correlation lengths
- Decorrelation times
- Poloidal flow, flow fluctuations, flow shear, and 2D flow fields
- 2D fluctuation imaging
- 3-wave bispectral analysis
- Particle flux

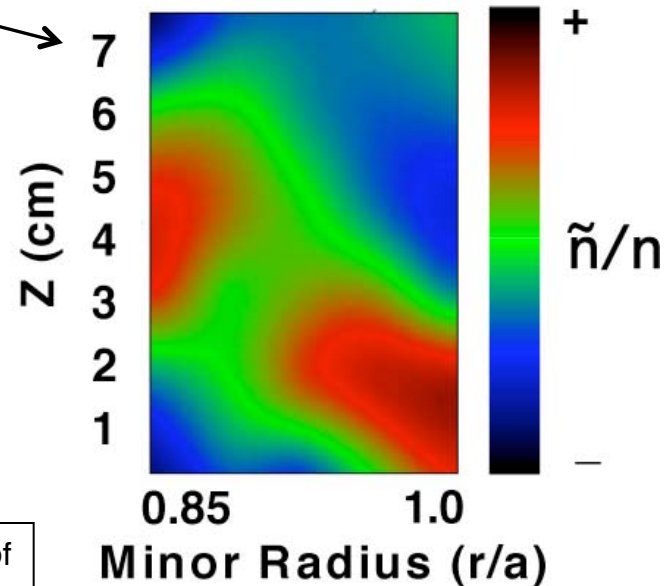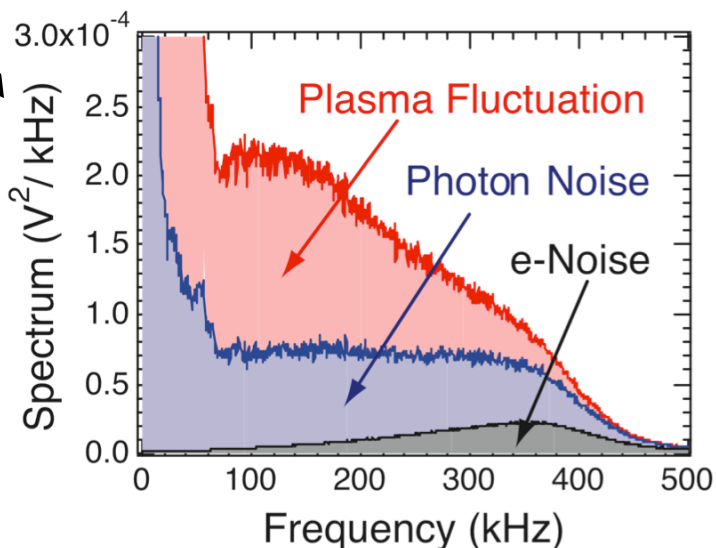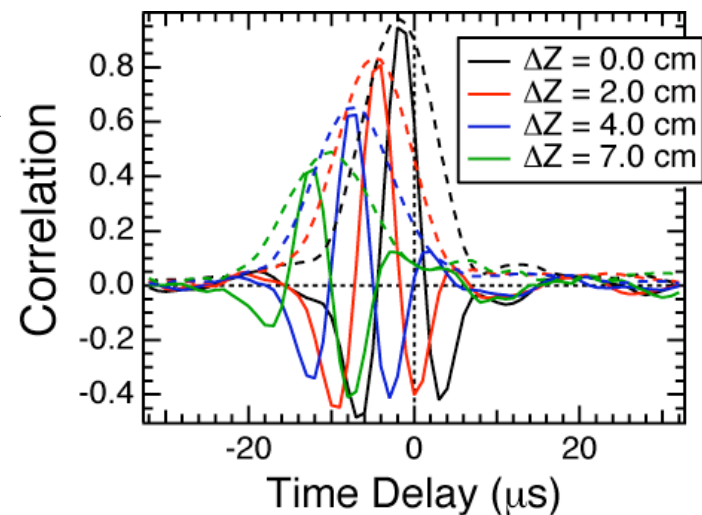


Figures courtesy of DIII-D BES group

BES measurements contribute to many research topics

- Turbulence & transport
 - Momentum transport
 - Transport barriers
 - Flow shear suppression
 - Zonal flows/GAMs
 - Turbulence spreading & nonlocal transport
 - Nonlinear 3-wave mode coupling
 - Turbulence code validation
- Boundary physics
 - LH transition
 - H-mode pedestal
 - ELMs & peeling-ballooning modes

- MHD instabilities
 - Alfvén eigenmodes (RSAE, CAE, GAE, TAE, and others)
 - Energetic particle modes
 - Mode structures


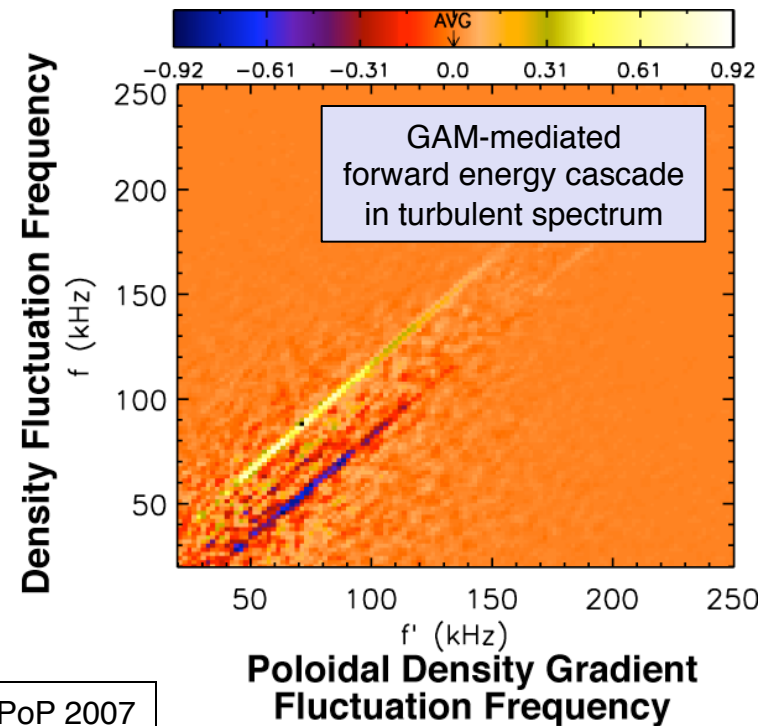


Holland et al, PoP 2007

BES measures Doppler-shifted D_α emission from neutral beam particles to resolve ion gyroscale fluctuations


$$\frac{\delta I_{D\alpha}}{I_{D\alpha}} = \frac{1}{2} \times \frac{\delta n_i}{n_i} \times C(E_{NB}, n_e, T_e, T_i, Z_{eff})$$

\uparrow neutral beam D_α emission
 \uparrow ion density fluctuation
 \uparrow nearly constant factor

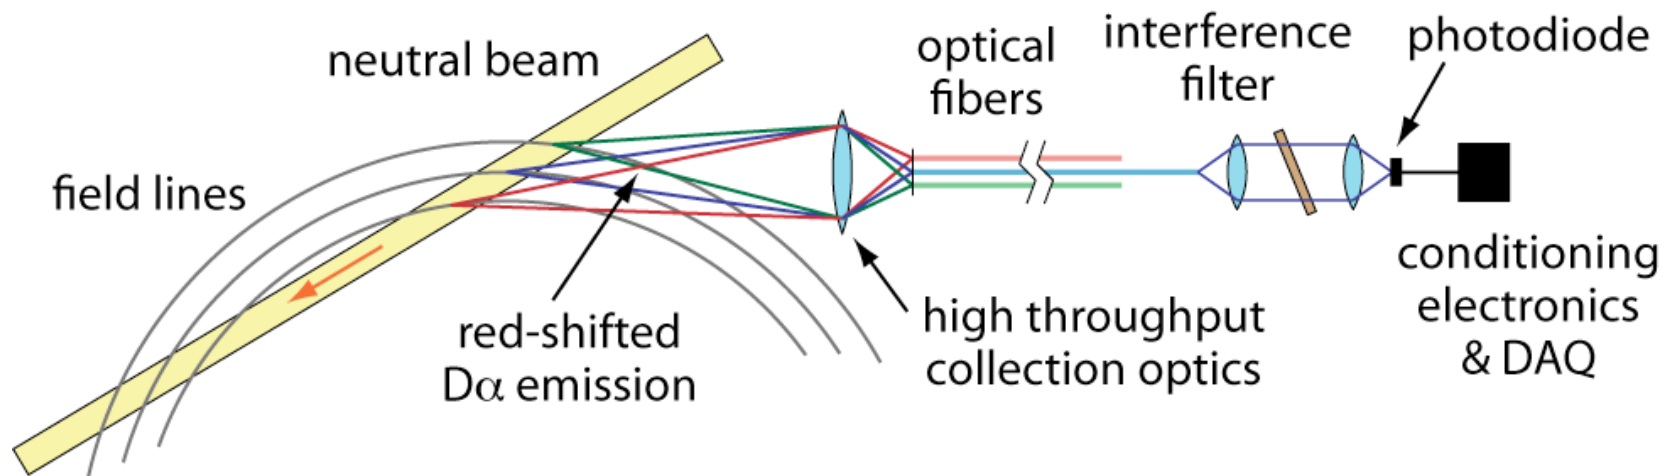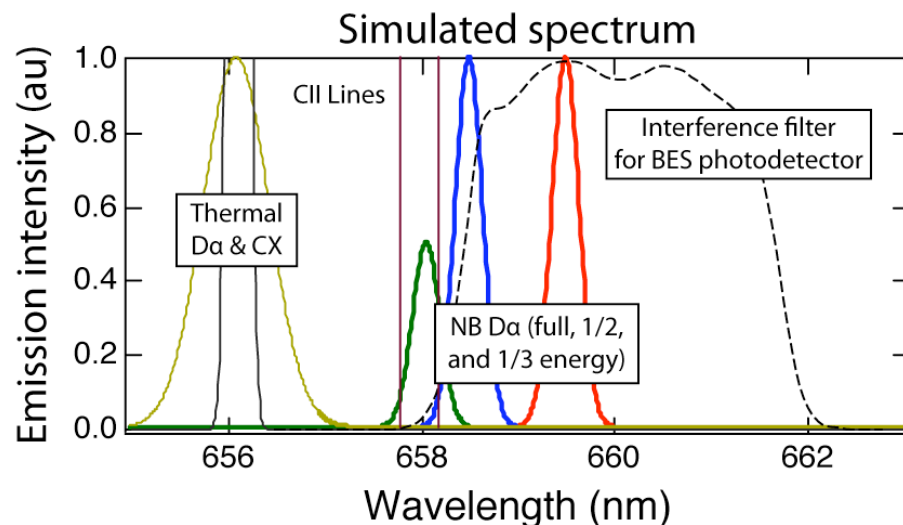


MSE & FIDA measurements on NSTX indicate NB D_α emission is comparable to or greater than C-II emission

MSE spectrum
tangential view with
large red-shift in NB D_α
and long-time integration

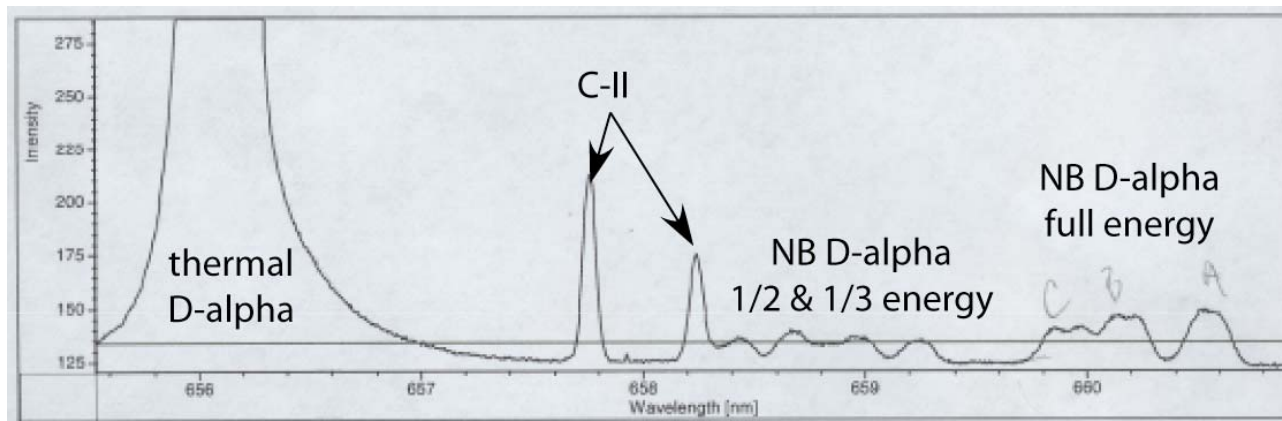

Courtesy of H. Yuh & F. Levinton

FIDA spectrum
vertical view with
small blue-shift in NB D_α
and short-time integration

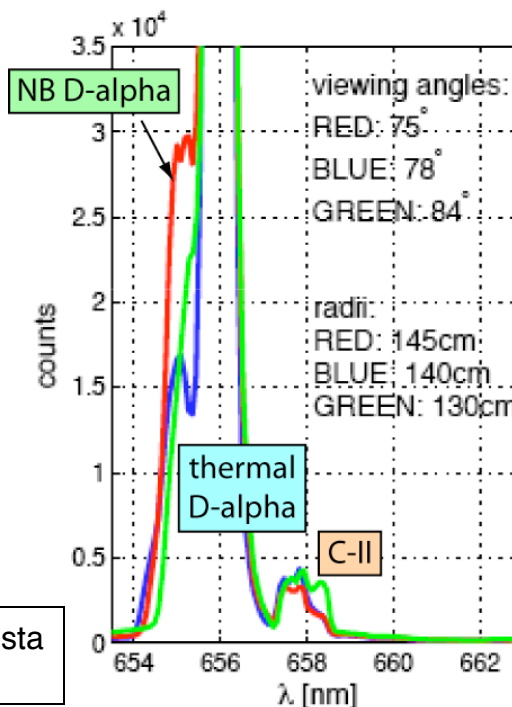




Courtesy of M. Podesta
& W. Heidbrink

MSE & FIDA spectra
indicate:



$$\frac{I_{NB D\alpha}}{I_{C-II}} \approx 1 - 10$$

The NSTX BES view
is similar to the MSE view


The NSTX BES system includes two optical views centered at $R = 130$ cm and 140 cm

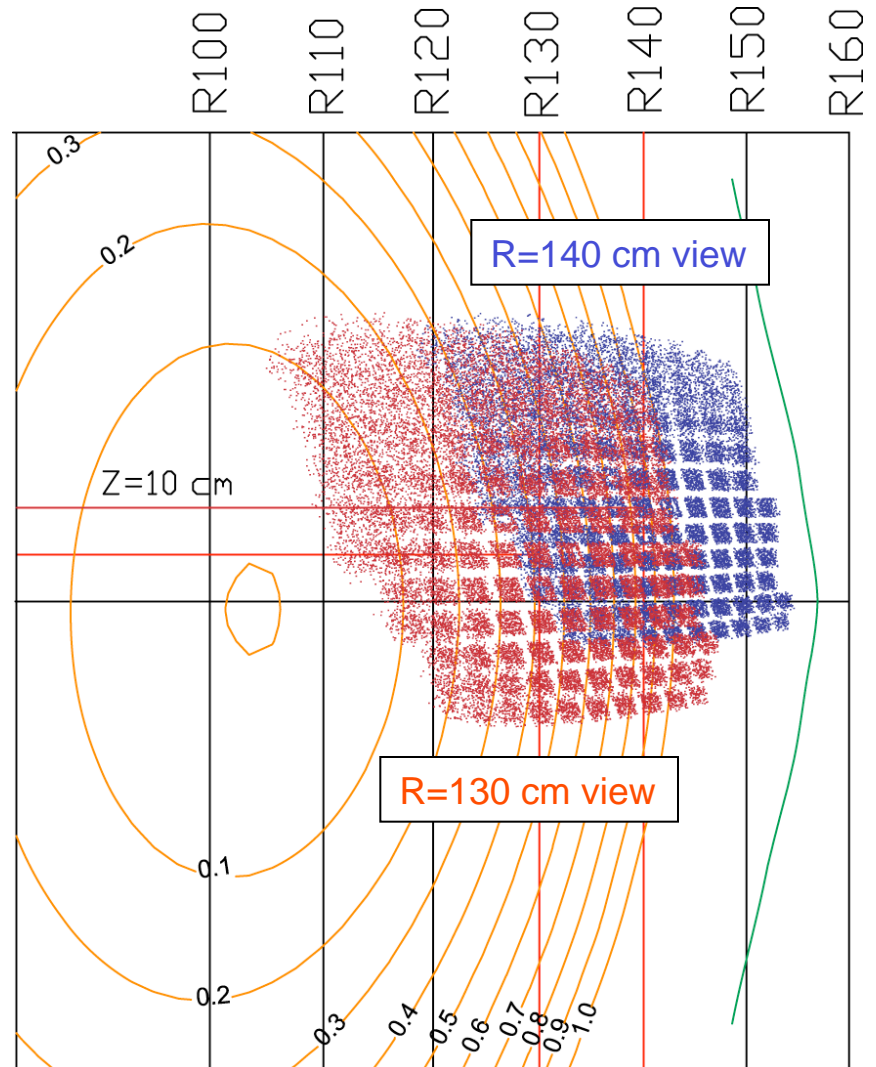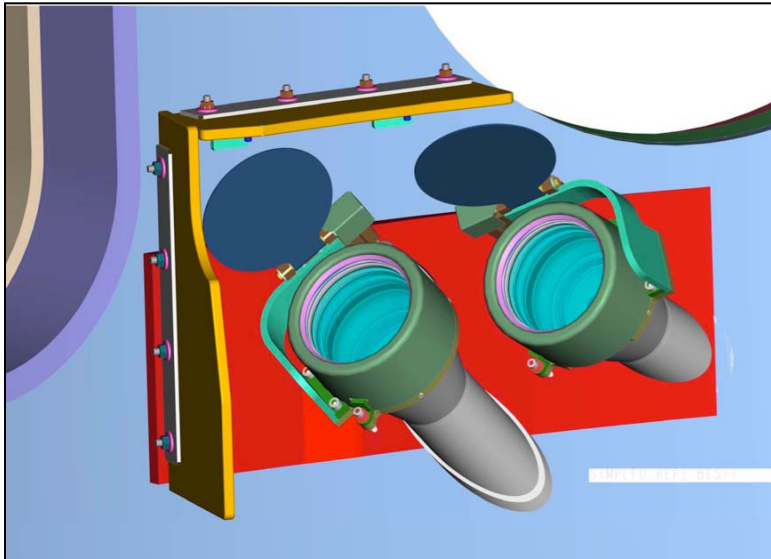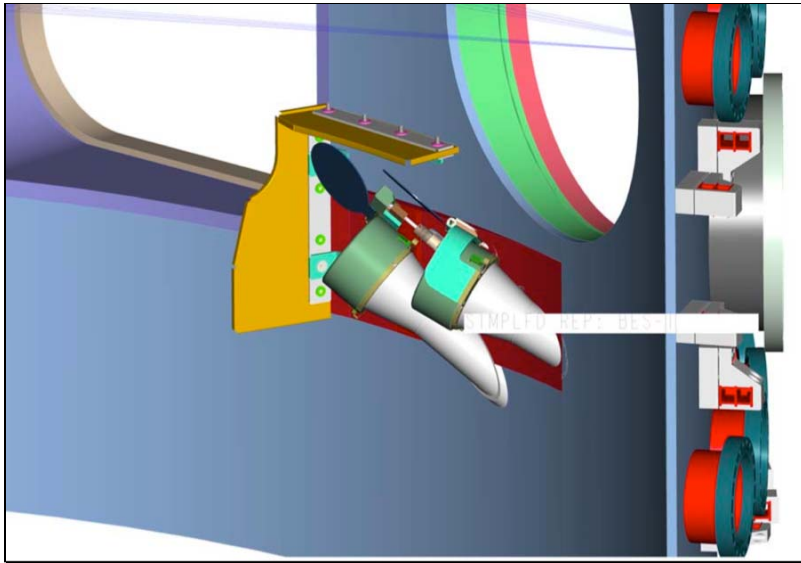


Optical views are aligned to the magnetic field pitch angle within the NB volume to optimize cross-field spatial resolution

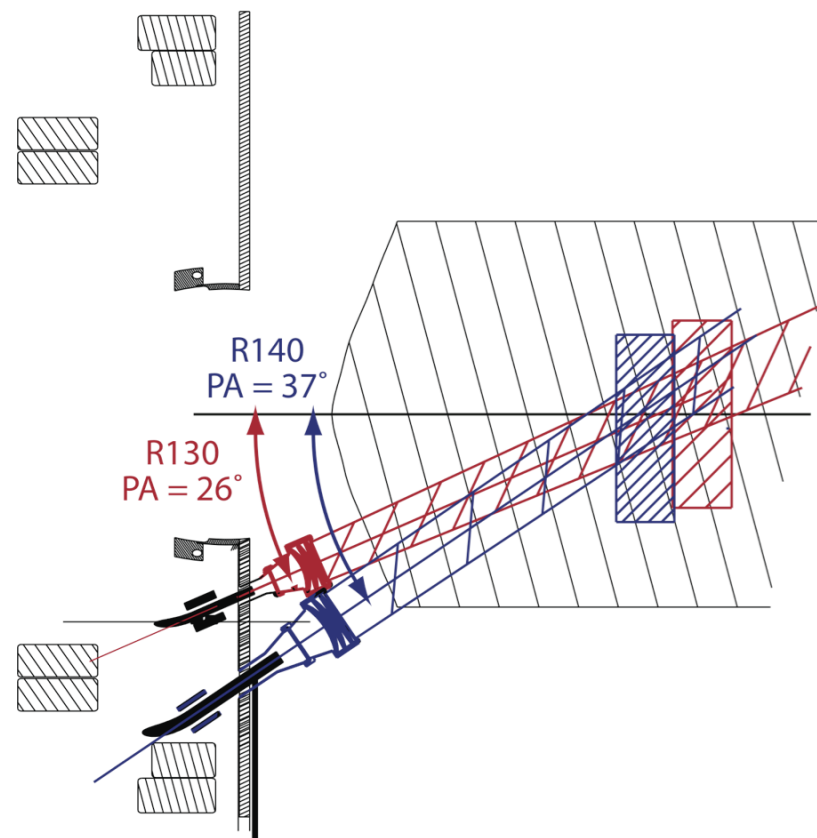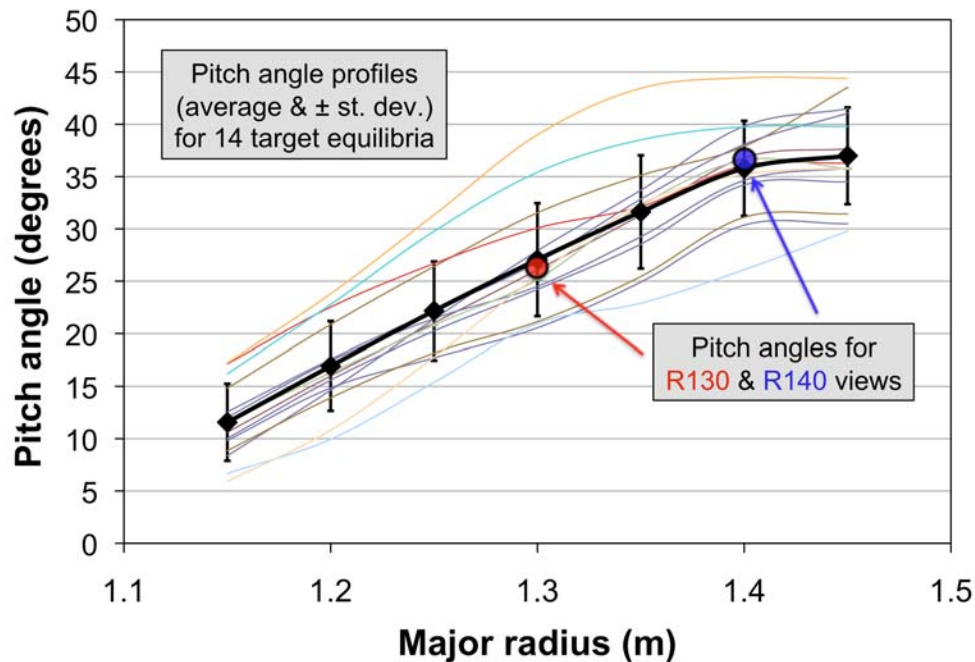

Collection optics installed in Fall 2009

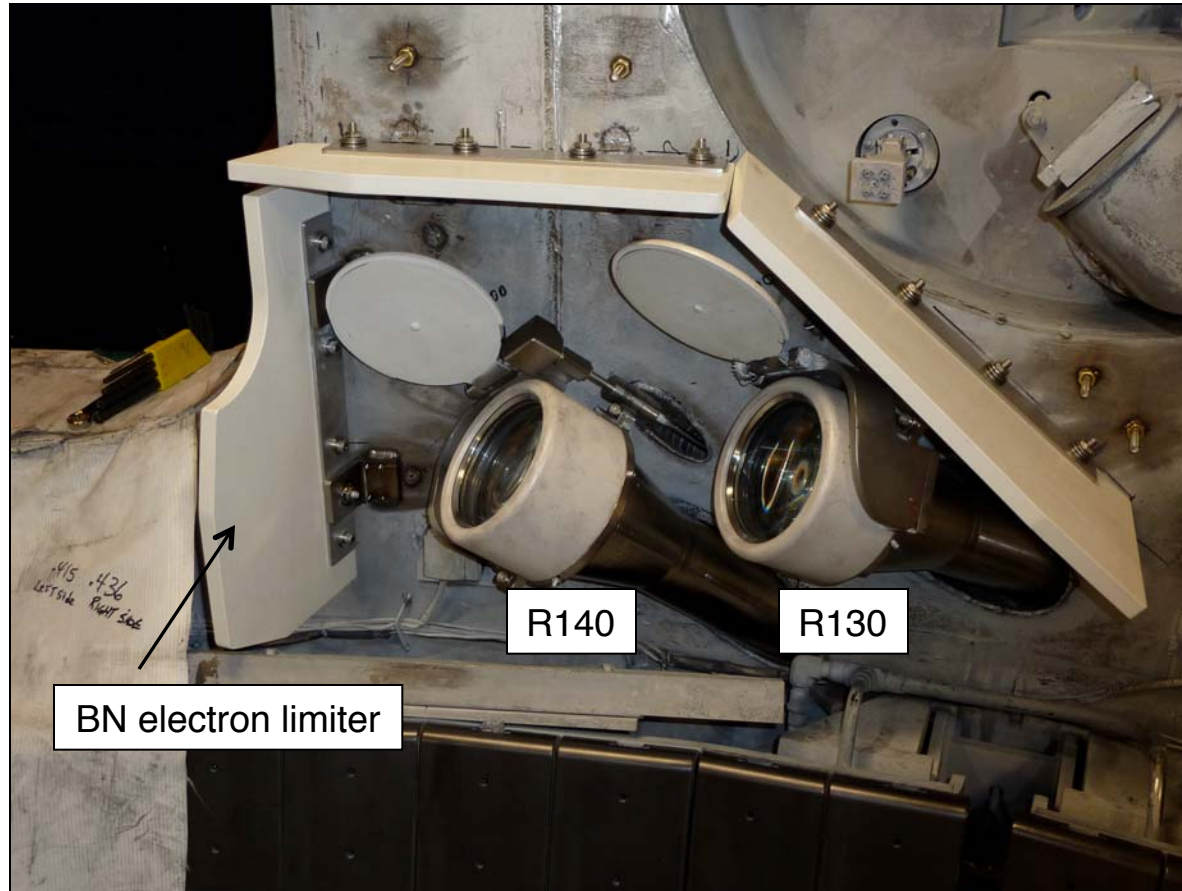

Initial aperture plates include radial arrays, poloidal arrays, and 2D grids

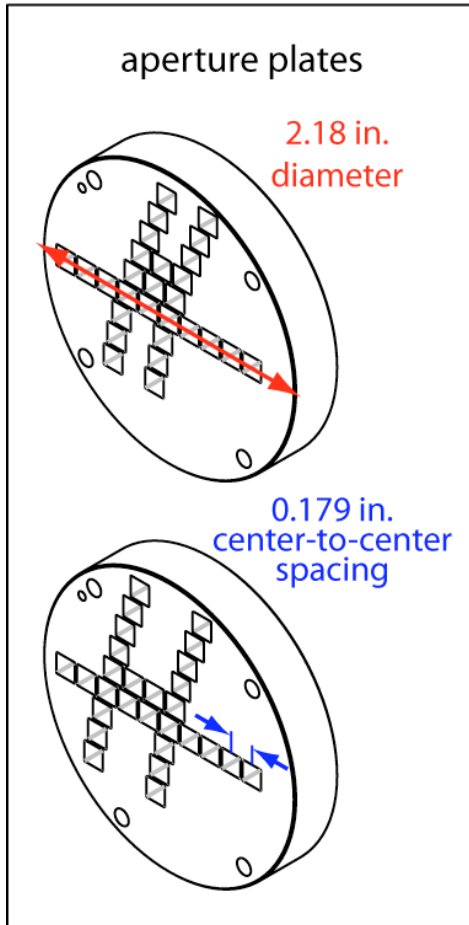

Fiber bundle pattern in aperture plate
(viewed looking into plasma)

R130 view


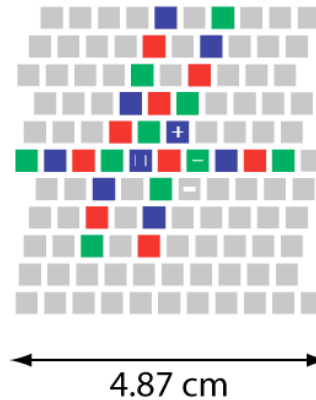


Image at neutral beam

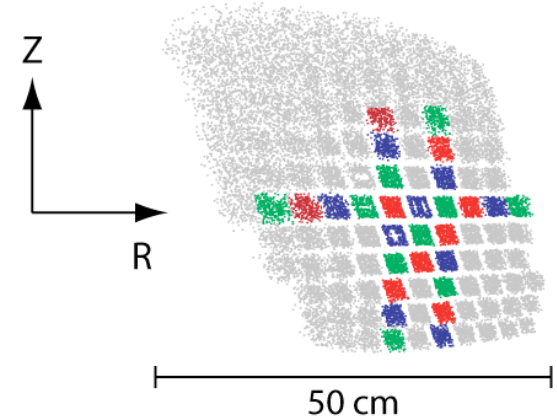

Fiber bundle pattern in aperture plate
(viewed looking into plasma)

R140 view




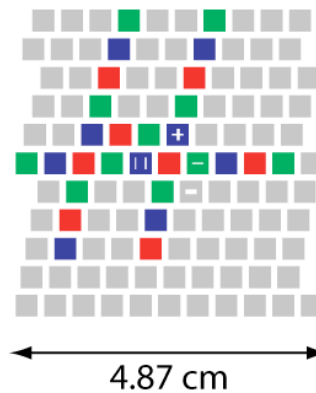




Image at neutral beam

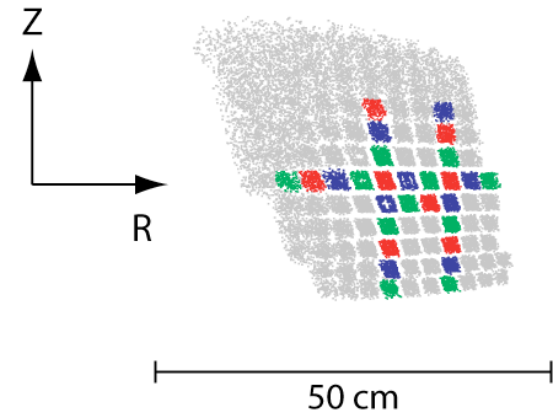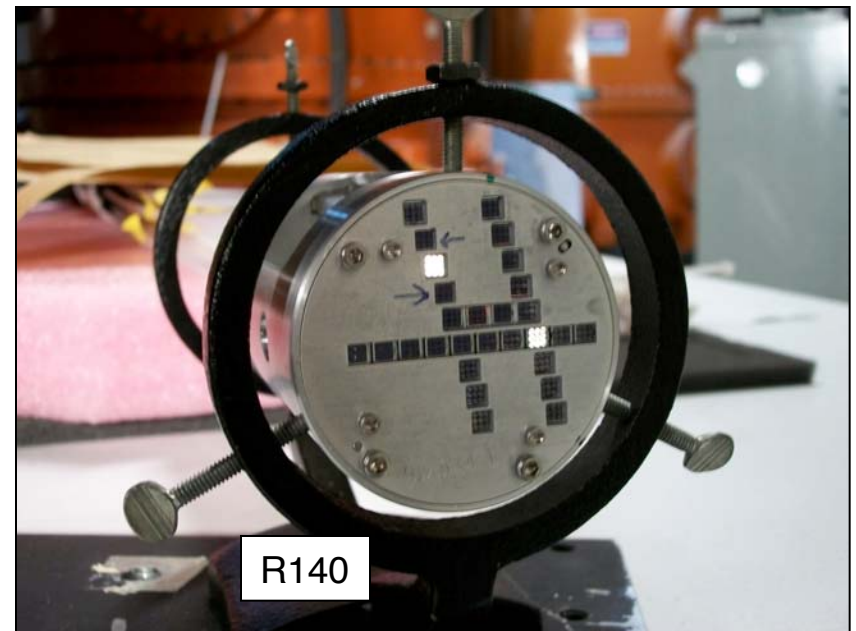



Aperture plates and strain reliefs assembled and installed

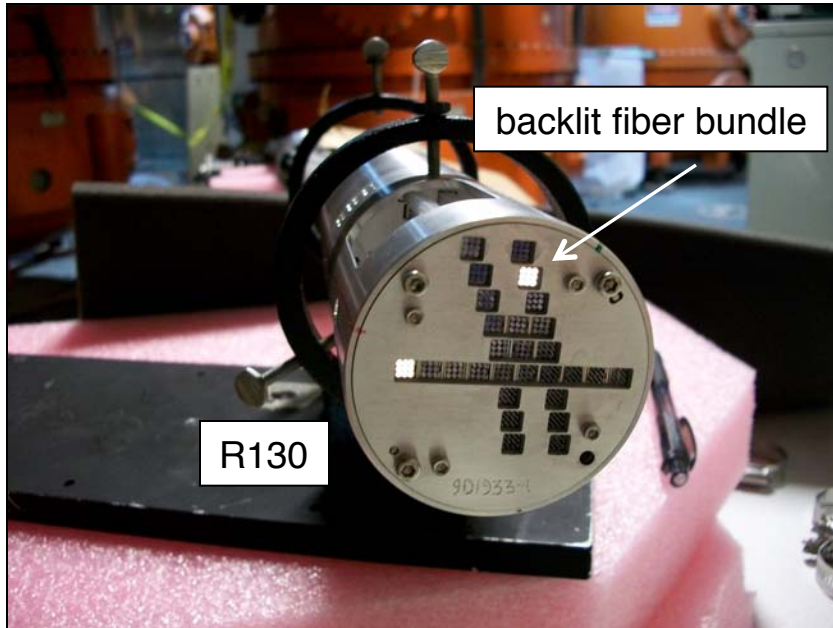






Initial aperture plates provide radial coverage from $r/a = 0.1$ to beyond the LCFS with 2-3 cm bundle images

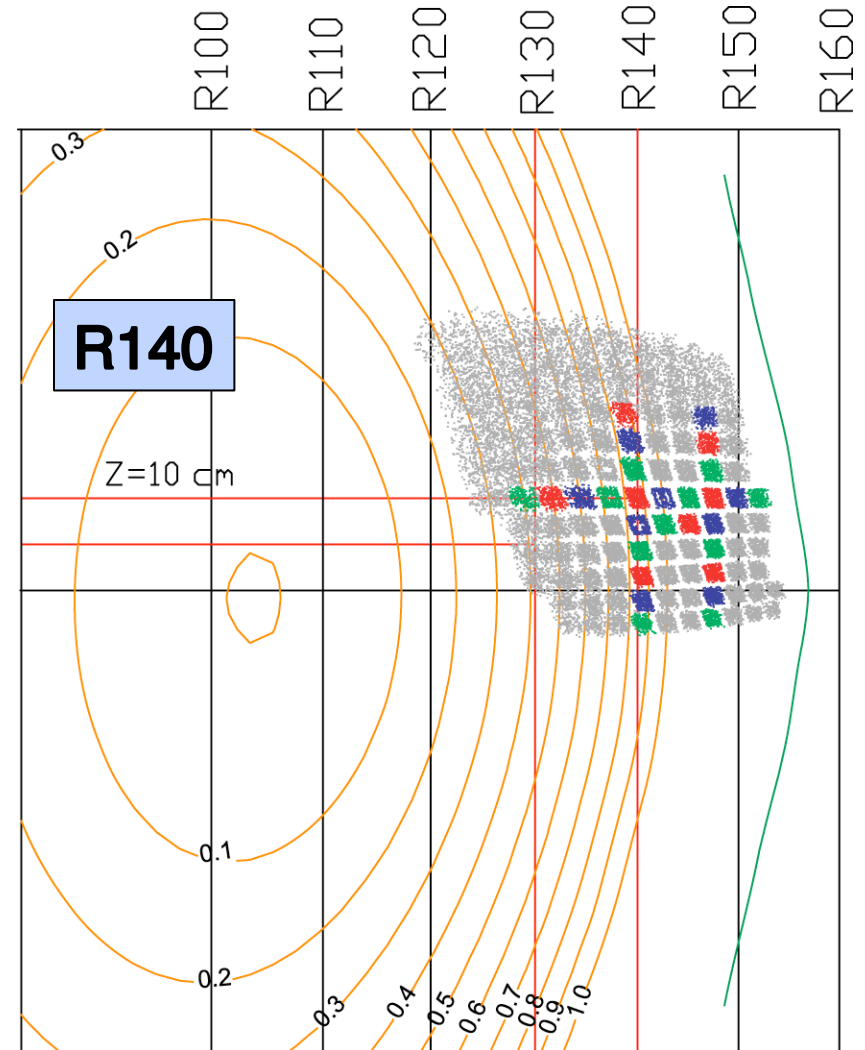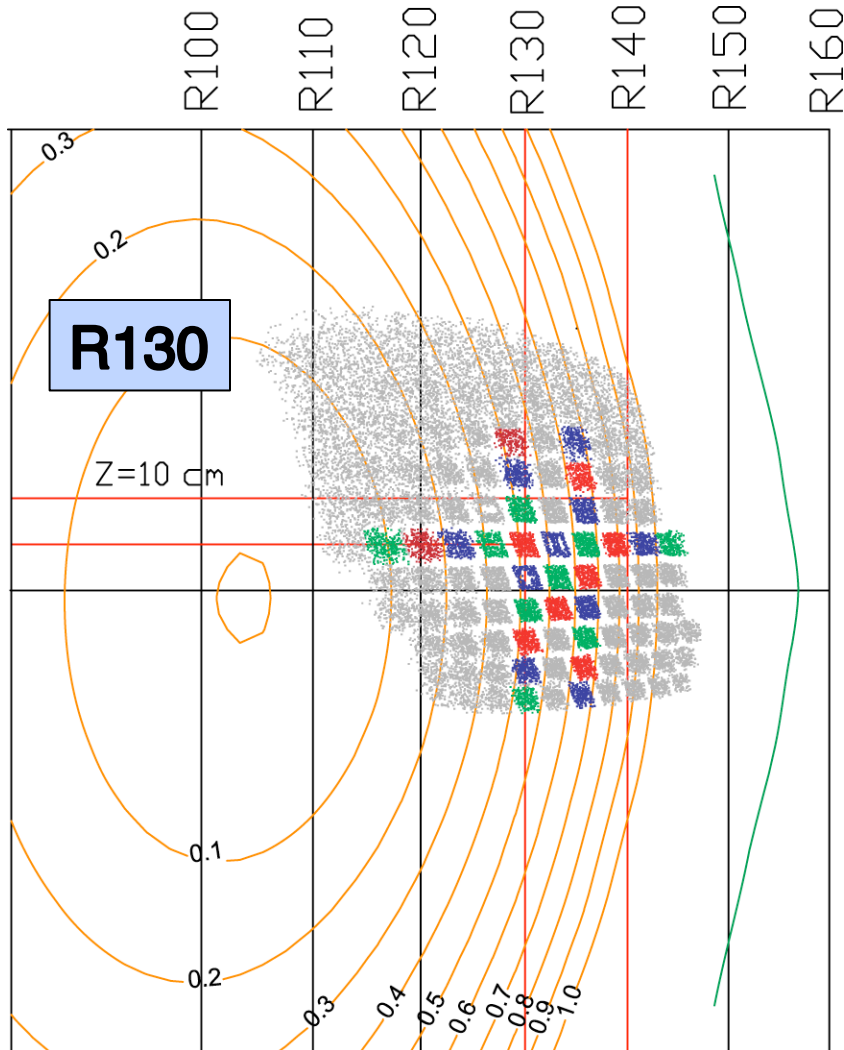


Spatial calibration performed in Fall 2009

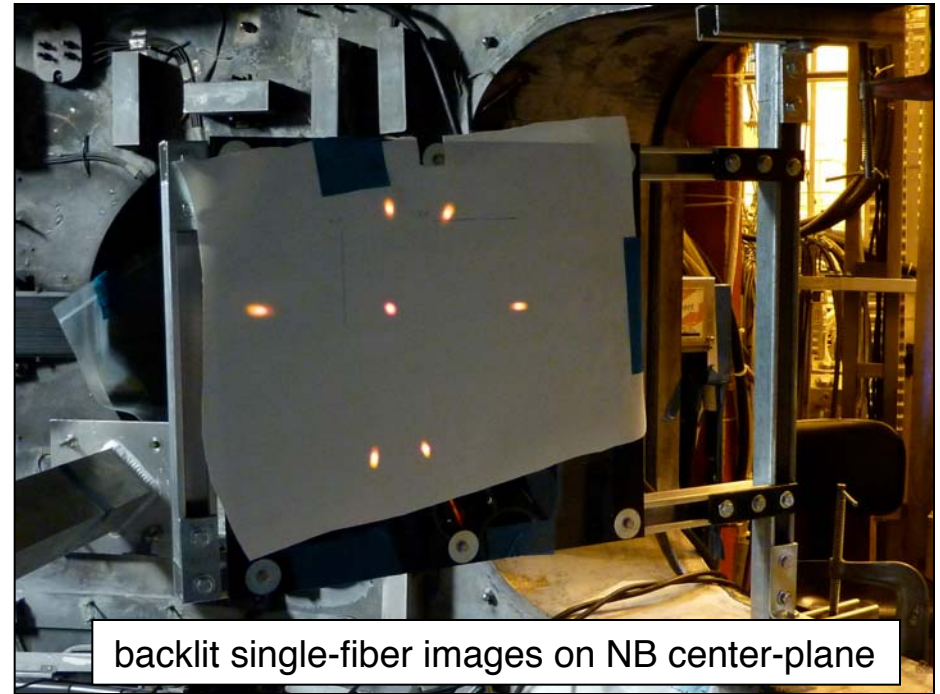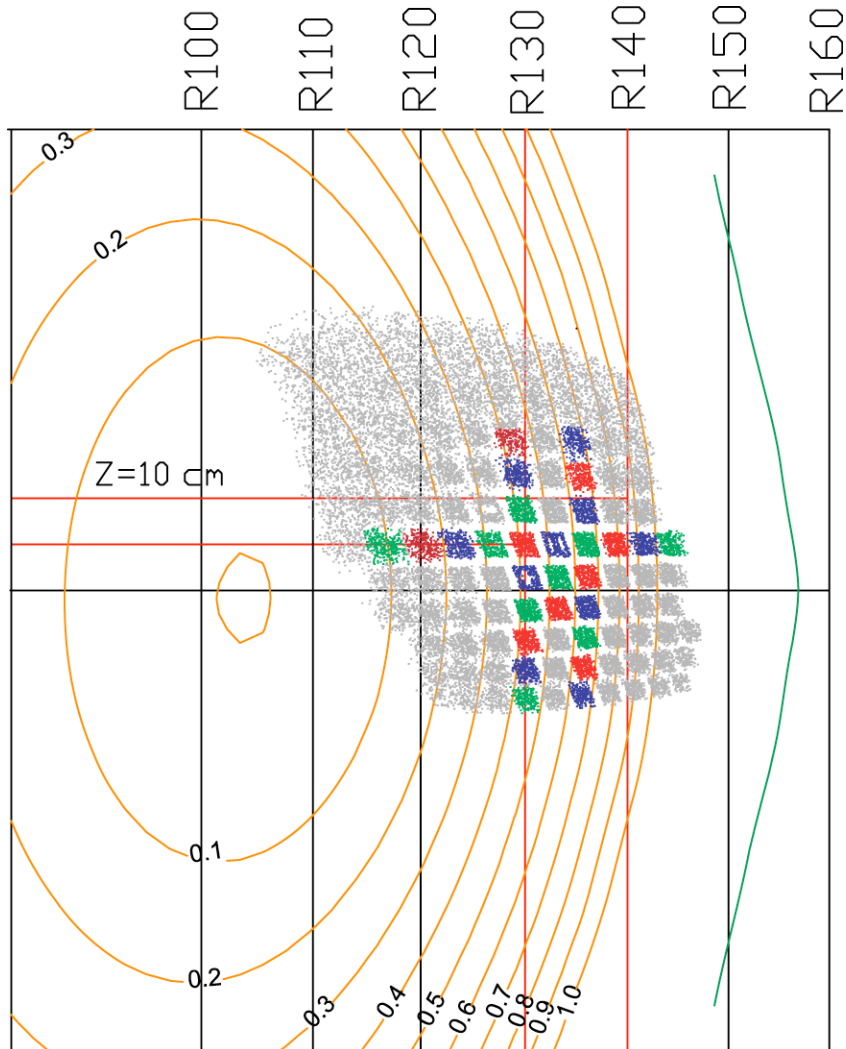

Plasma coverage can sample modes up to $k_{\perp} \rho_i \approx 1.5$

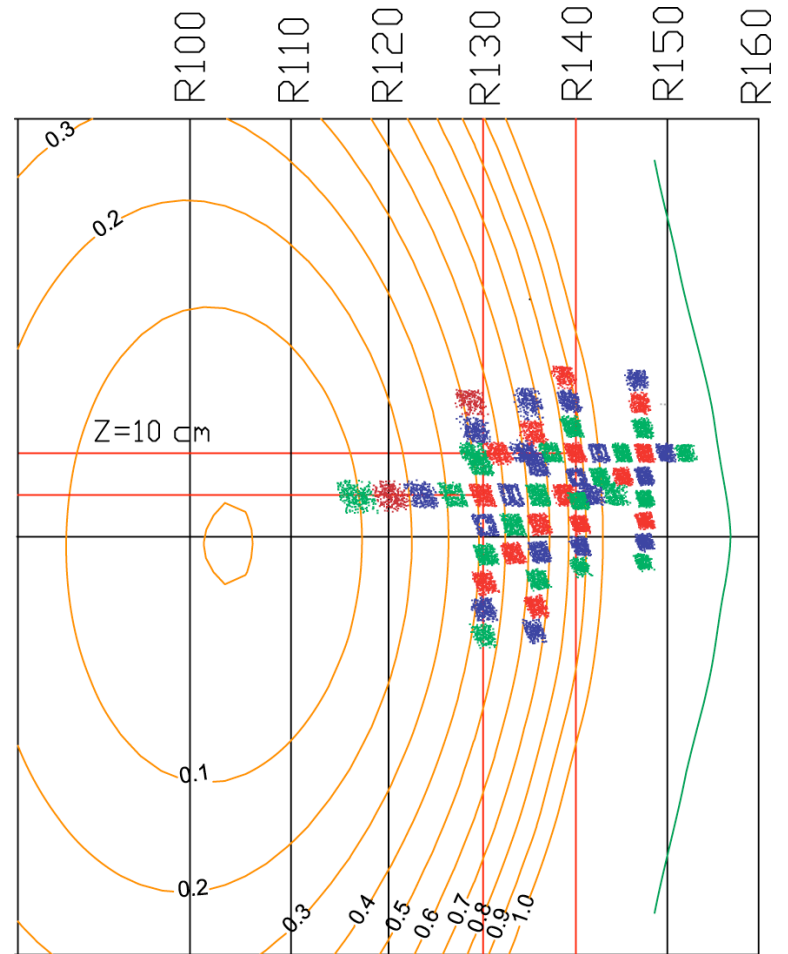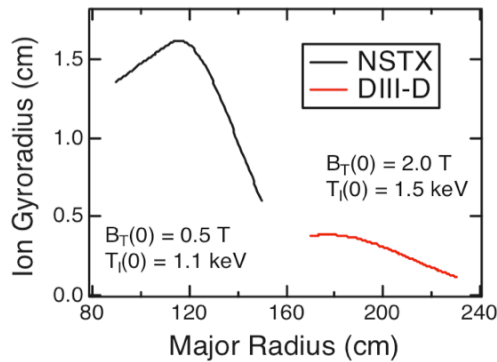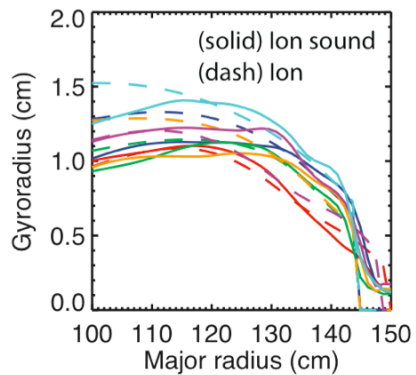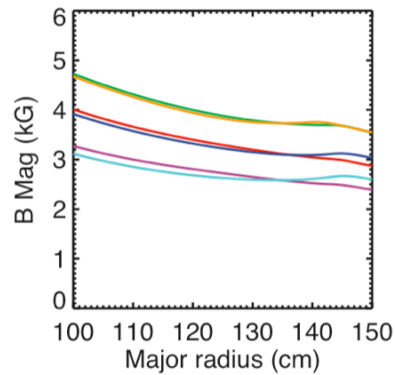
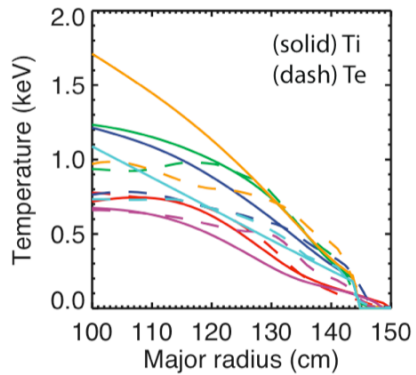


Point-spread-function and spatial-transfer-function calculations will provide spatial and k-space measurement parameters

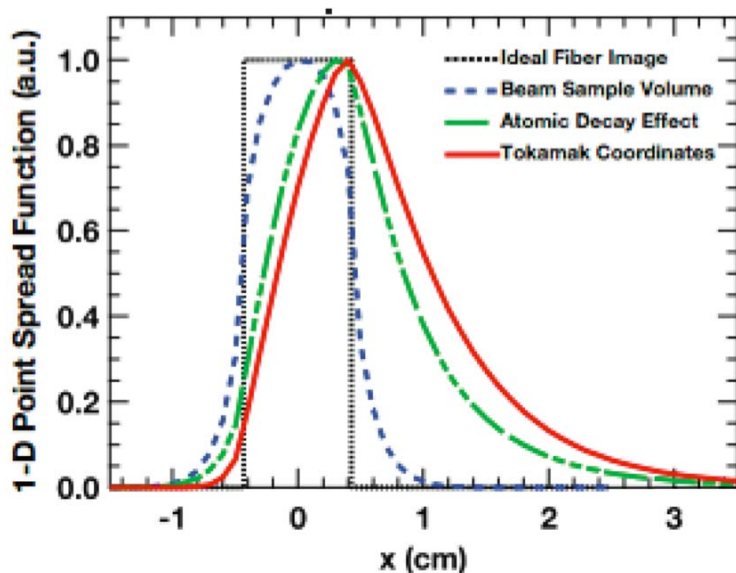




- Point-spread-function (PSF) specifies the measurement volume taking into account...
 - Viewing optics
 - NB geometry
 - Magnetic equilibrium
 - Atomic physics
- Spatial-transfer-function (STF) specifies the measurement sensitivity in k-space

$$\text{STF}(\vec{k}) = \text{FT}(\text{PSF}(\vec{x}))$$



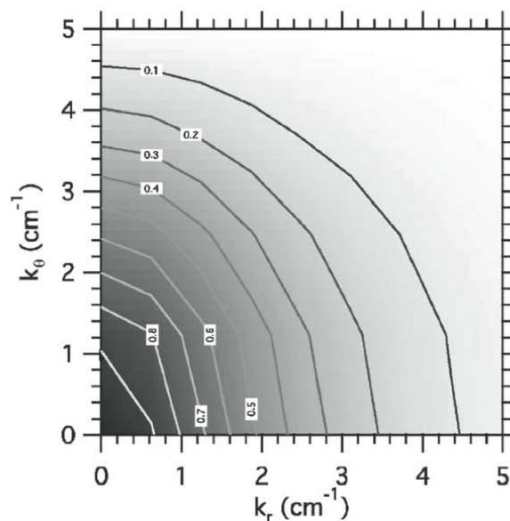
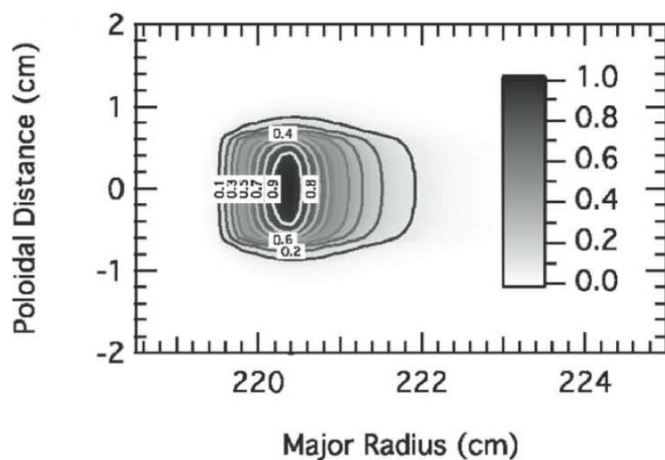


DIII-D BES
PST/STF calculations
Shafer et al, RSI 2006




40 meter fiber bundles, each with 9 1-mm fibers, will transmit NB D_α emission from collection optics to photodetectors

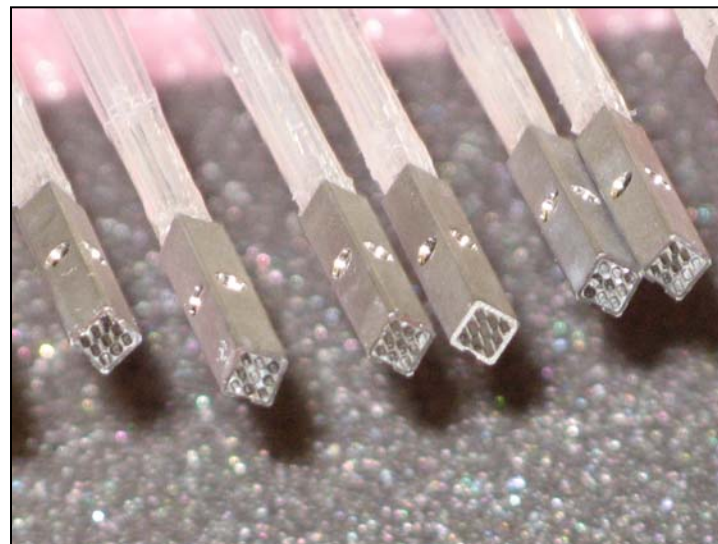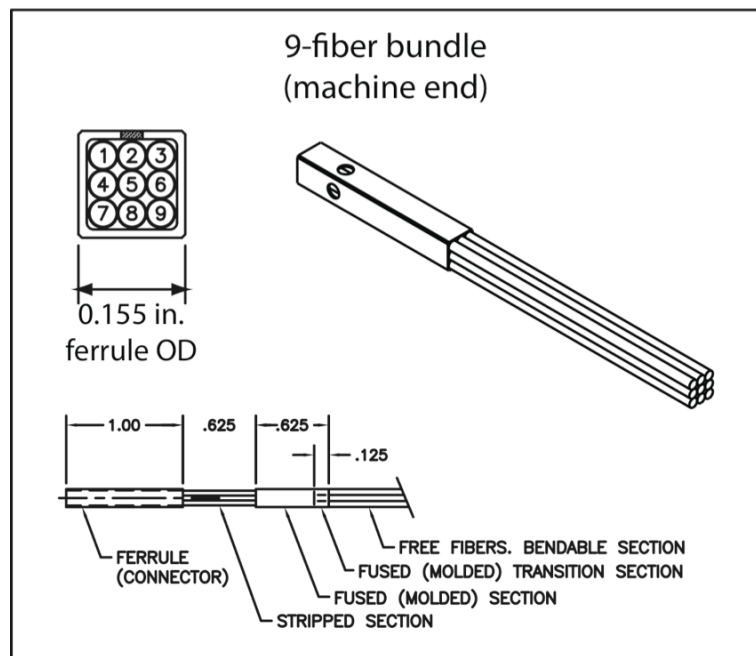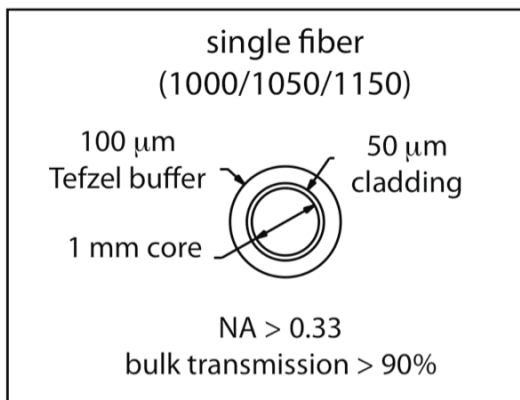


Single fibers achieve 65% transmission & 9-fiber bundles achieve 45% transmission at f/1.5

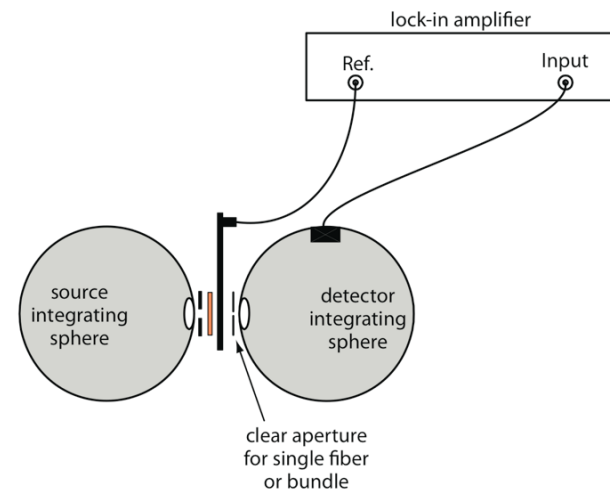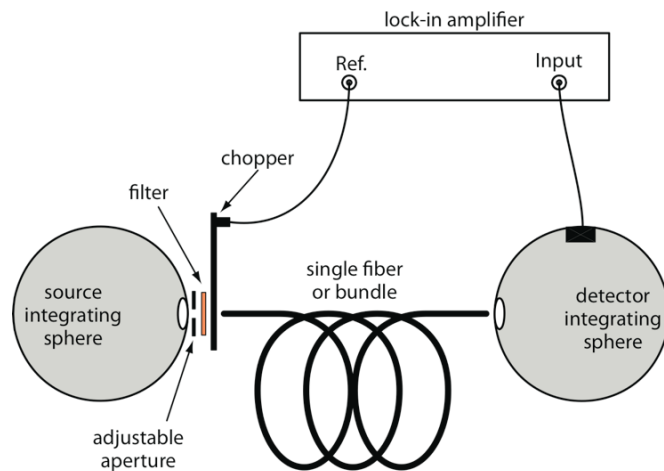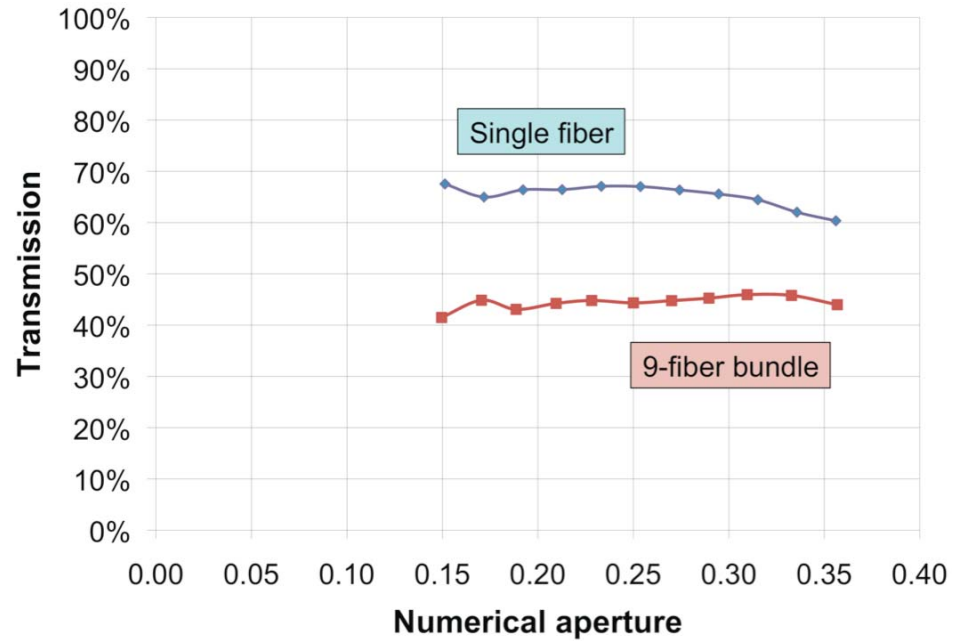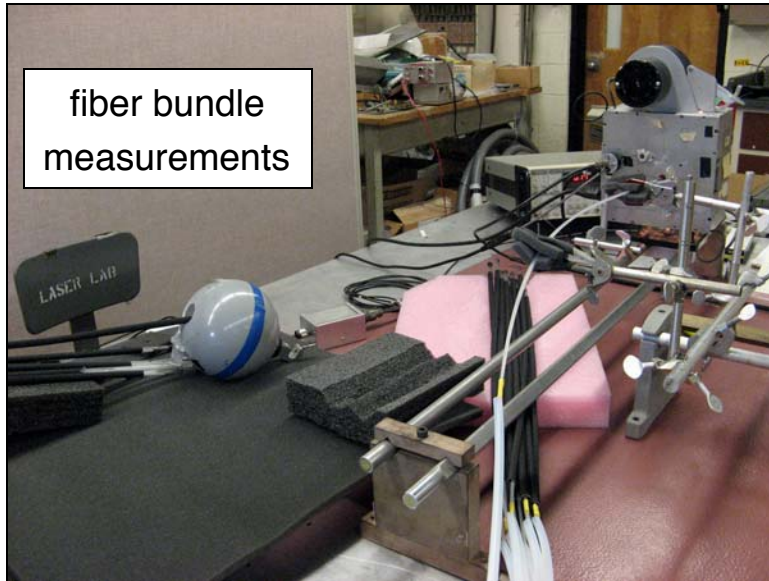

Tilt-tune interference filter provides about 75% transmission in a 4 nm window

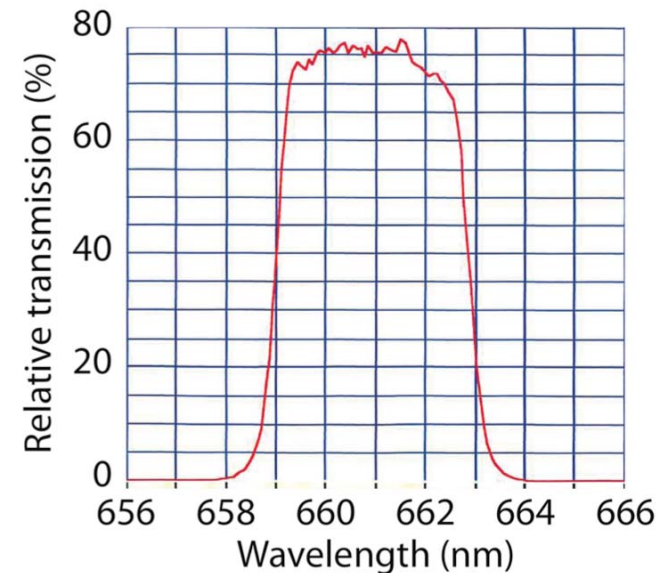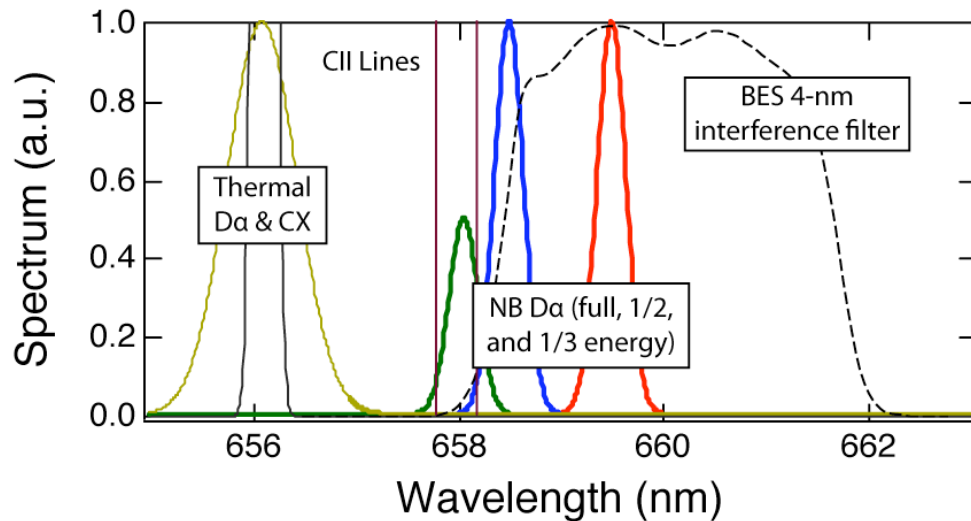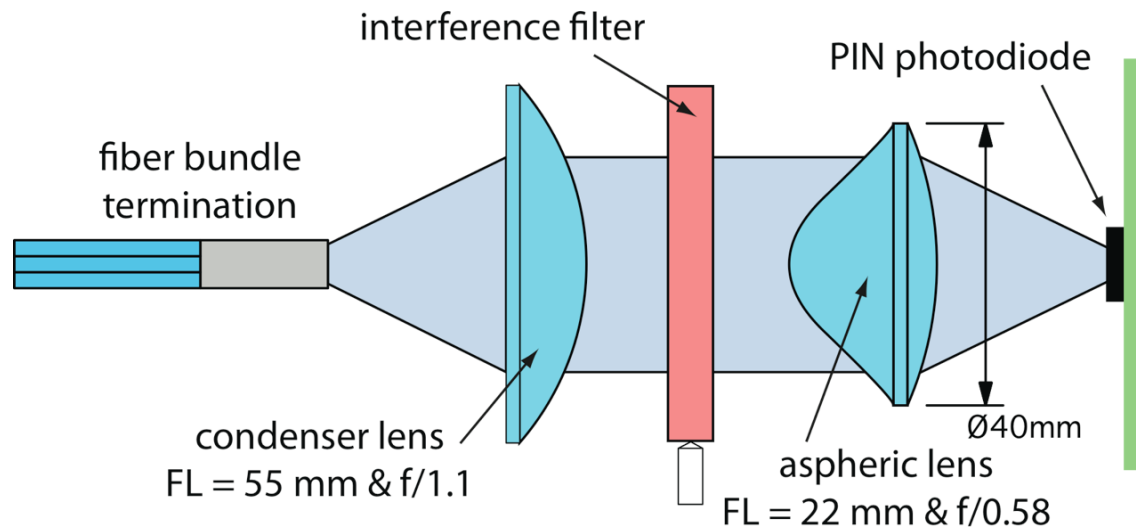

Low-noise, low-capacitance photodiode & FET are key to low-noise, high-responsivity photodetector

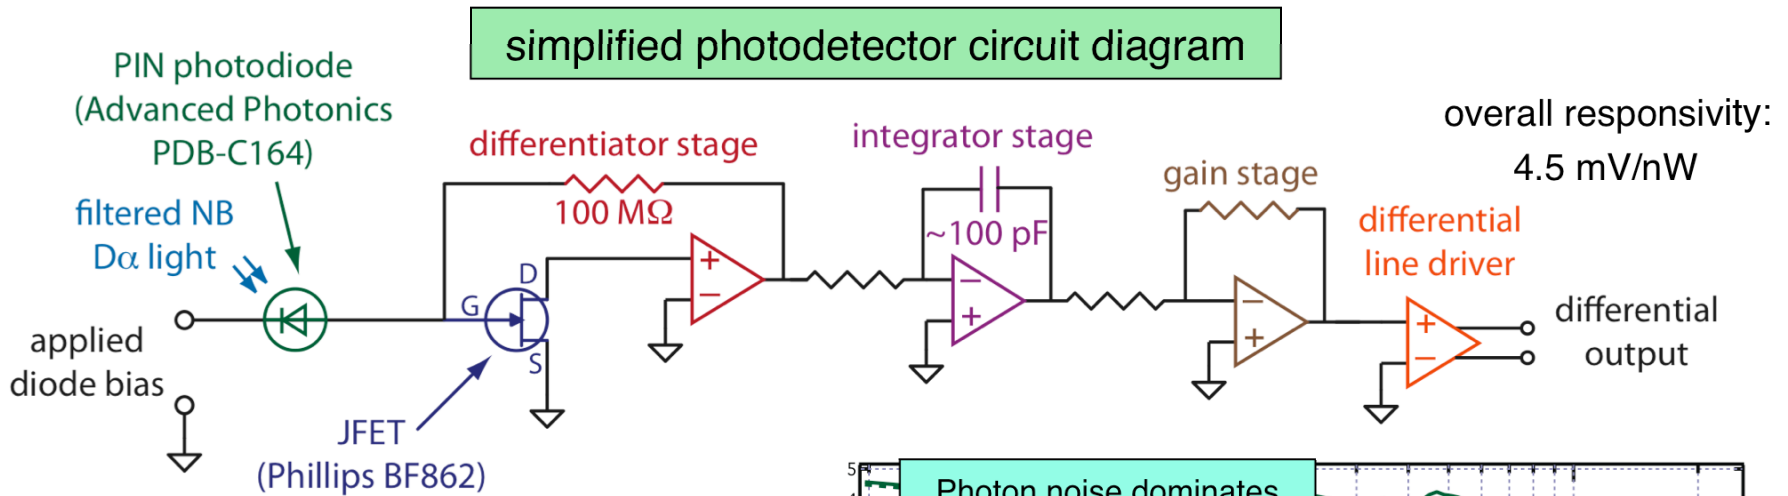

Noise figure of merit:


$$e_{\text{noise}} \times (C_{\text{diode}} + C_{\text{FET}})$$

Design values:





$$e_{\text{noise}} = 0.8 \text{ nV/Hz}^{1/2}$$

$$C_{\text{diode}} = 7 \text{ pF}$$


$$C_{\text{FET}} = 10 \text{ pF}$$

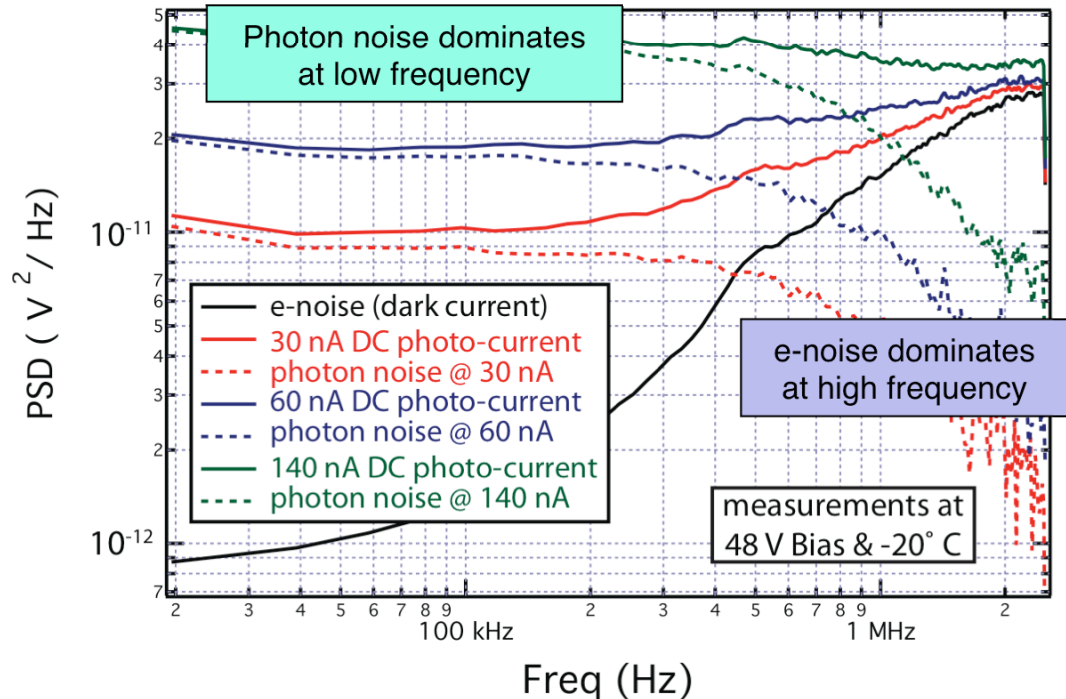


Photodetectors, 8-channel detector box, and optics module

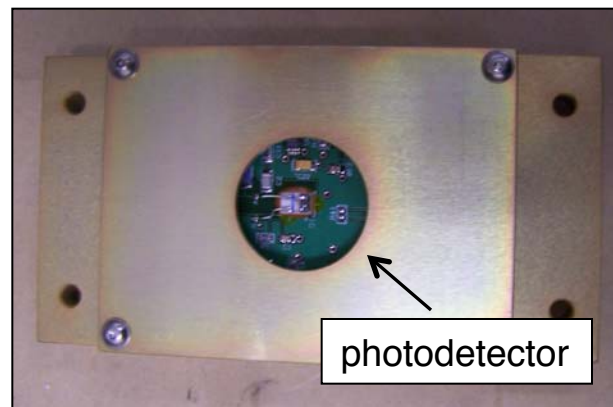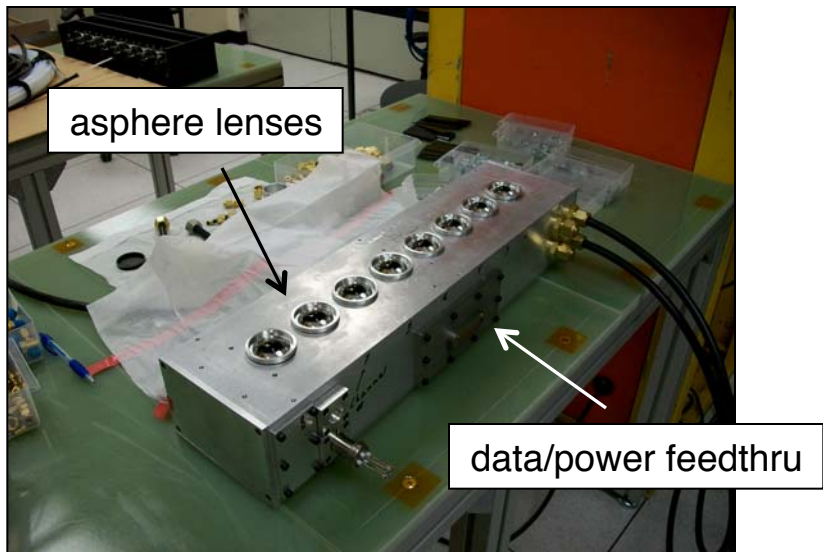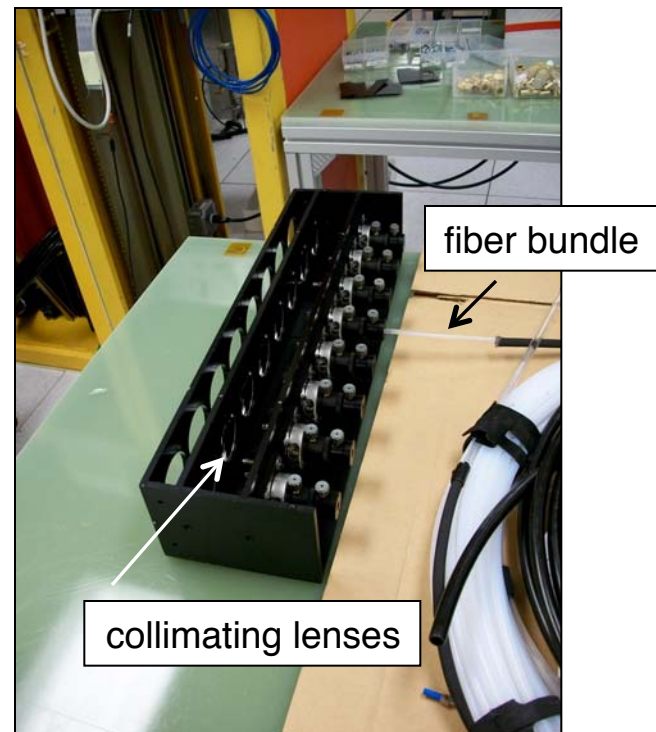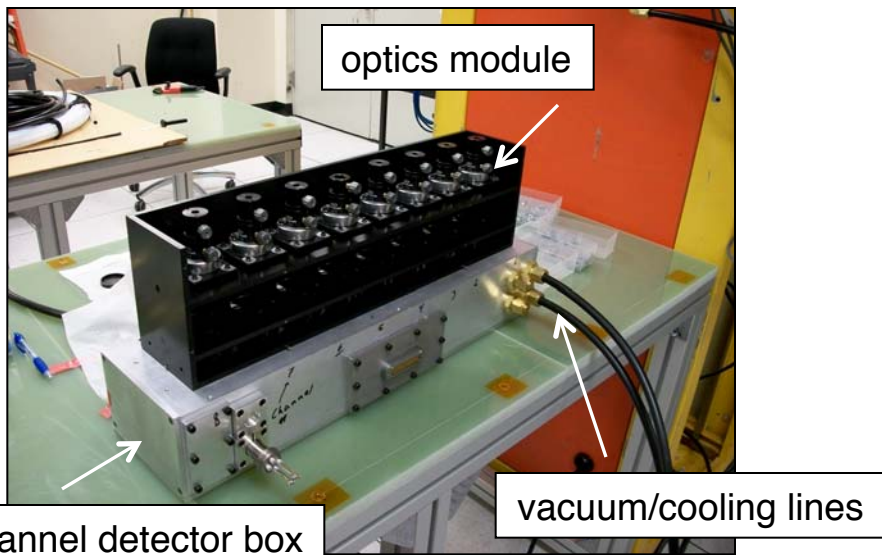

Signal conditioning circuit provides adjustable gain & digitizer with FPGA FIR filter provides 2 MHz sampling

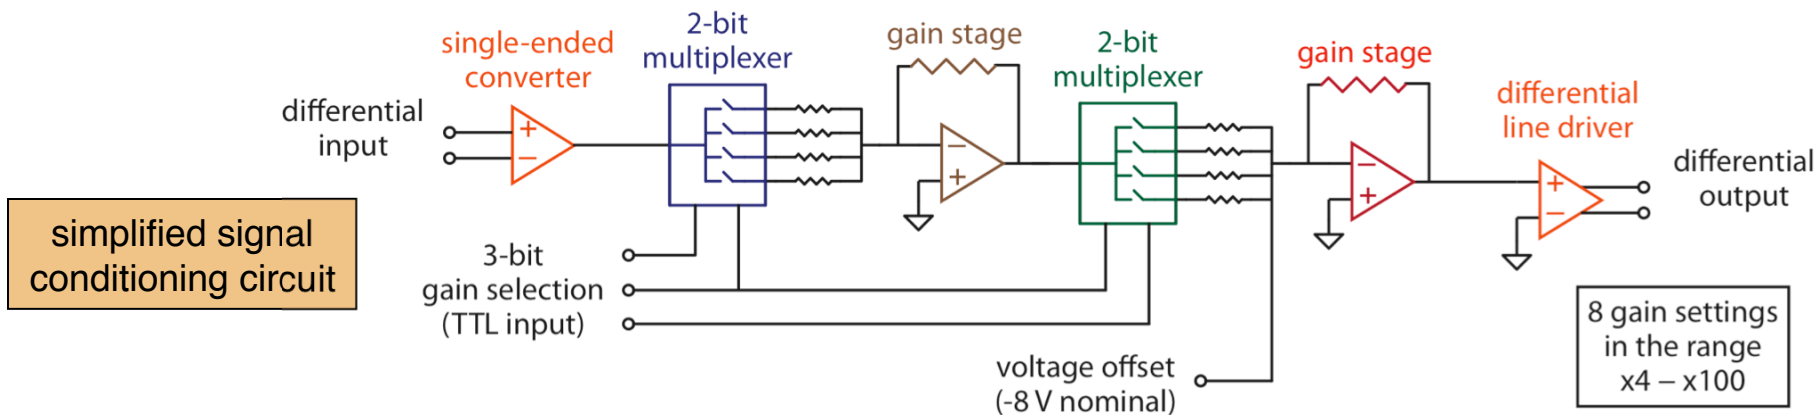

- D-TACQ ACQ132 digitizer
 - Simultaneous 32 channel sampling
 - 16-bit digitizer (effective bits with oversampling)
 - ± 10 V differential input
 - 2.5 MHz anti-aliasing filter
 - FPGA with 127-tap FIR filter
 - Filtered 2 MHz output sampling with 32 MHz input sampling

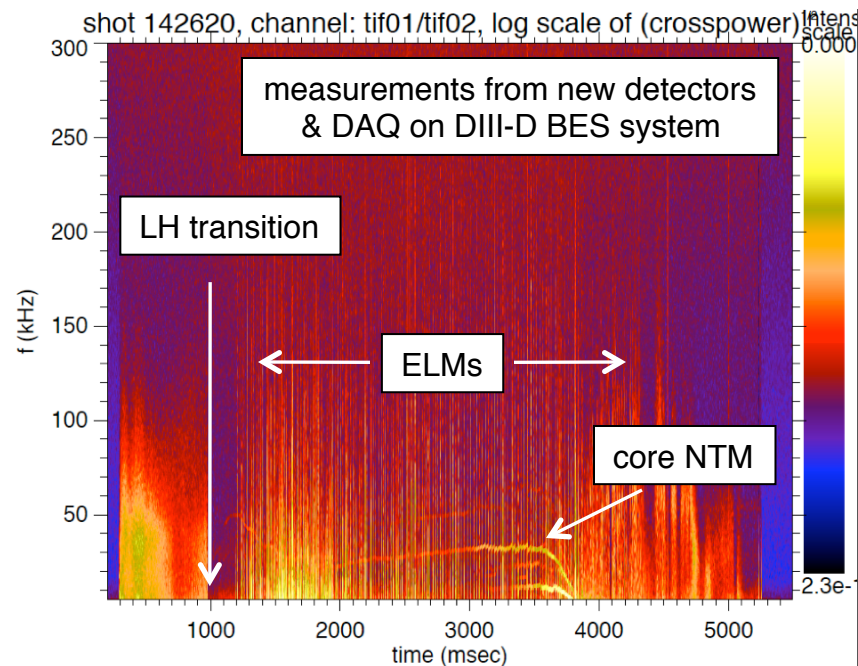

Compared to the **DIII-D BES system**, the **NSTX BES system** incorporates new technology and novel design aspects

- Photodetector exhibits lower noise
 - Low-noise, low-capacitance surface-mount photodiode & FET
 - Low-capacitance circuit board layout
- Refrigerant cooling at -20°C
 - DIII-D system uses LN2 cryo-cooling
- Red-shifted viewing geometry aligned to steep NSTX pitch angles
 - DIII-D system uses blue-shifted viewing geometry with shallow pitch angles
- 2 MHz sampling with FIR and anti-aliasing filters will accommodate large Doppler shifts from toroidal rotation and GAE/CAE studies
 - DIII-D system samples at 1 MHz with analog filter
- 9 1-mm fibers per channel at f/1.5 and 2.3 mm²-ster
 - DIII-D system uses 11 1-mm fibers per channel at f/2 and 1.6 mm²-ster
- Larger spot sizes (magnification) accommodate larger gyro-radii in NSTX
 - NSTX system will access slightly higher $k_{\perp}\rho_i$
- **Signal and noise levels in the NSTX BES system should be similar to the DIII-D BES system due to multiple offsetting factors**

Status & plans: on schedule for first data in Spring 2010

- In-vessel collection optics installed & spatial calibration performed
- Fiber bundle transmission and $f/\#$ have been measured
- Fiber bundles (56) and aperture plates installed
- 8-channel detector box installed
 - 3 additional 8-channel boxes will come online within months for a total of 32 channels
- DAQ and essential control equipment installed
 - Remote control & monitoring capabilities will come online in Spring 2010
- BES analysis software ported to PPPL in Spring 2010
- Possible experiments for 2010:
 - Anomalous momentum transport driven by low- k fluctuations
 - Characterization of pedestal fluctuations
 - Edge fluctuations and the LH transition
 - TAE & GAE mode structure measurements

Summary

- BES measures Doppler-shifted D_α emission from neutral beam particles to investigate ion gyroscale ($k_\perp \rho_i < 1$) density fluctuations
- The NSTX BES system includes two field-aligned optical views with coverage from $r/a \sim 0.1$ to beyond the LCFS
- Collection optics provide $\times 5.5 - \times 8$ magnification at 0.33 NA
- 9 1-mm fiber bundles provide 40% relative transmission
- Initial aperture plates include radial arrays, poloidal arrays, and 2D grids
- Low-noise, low-capacitance photodiode & FET enable photodetectors with low-noise and high-sensitivity without cryo-cooling
- Digitizer with anti-aliasing FPGA filter provides true 2 MHz sampling can accommodate large Doppler shifts from strong toroidal rotation in NSTX
- On schedule for first data in Spring 2010, and experiments are planned

*Supported by US DOE Contract Nos. DE-AC02-09CH11466 and DE-FG02-89ER53296